


SCMOS Layout Rules - Well

Rule	Description	Lambda		
		SCMOS	SUBM	DEEP
1.1	Minimum width	10	12	12
1.2	Minimum spacing between wells at different potential	9	18	18
1.3	Minimum spacing between wells at same potential	6	6	6
1.4	Minimum spacing between wells of different type (if both are drawn)	0	0	0

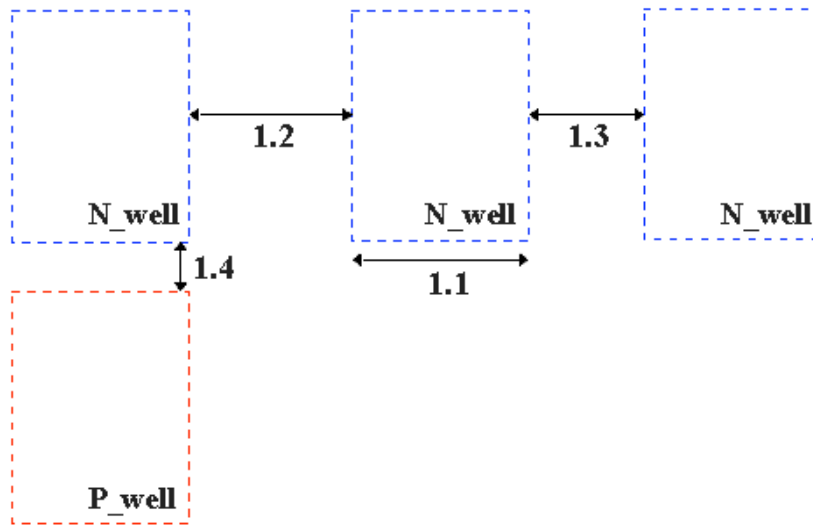


SCMOS Layout Rules - Active

Rule	Description	Lambda		
		SCMOS	SUBM	DEEP
2.1	Minimum width	3 *	3 *	3
2.2	Minimum spacing	3	3	3
2.3	Source/drain active to well edge	5	6	6
2.4	Substrate/well contact active to well edge	3	3	3
2.5	Minimum spacing between non-abutting active of different implant. Abutting active ("split-active") is illustrated under Select Layout Rules .	4	4	4


* Note: For analog and critical digital designs, MOSIS recommends the following minimum MOS channel widths (active under poly) for AMIS designs. Narrower devices, down to design rule minimum, will be functional, but their electrical characteristics will not scale, and their performance is not predictable from MOSIS SPICE parameters.

Process	Design Technology	Design Lambda (micrometers)	Minimum Width (lambda)
AMI_ABN	SCNA, SCNE	0.80	5
AMI_C5F/N	SCN3M, SCN3ME	0.35	9
AMI_C5F/N	SCN3M_SUBM, SCN3ME_SUBM	0.30	10

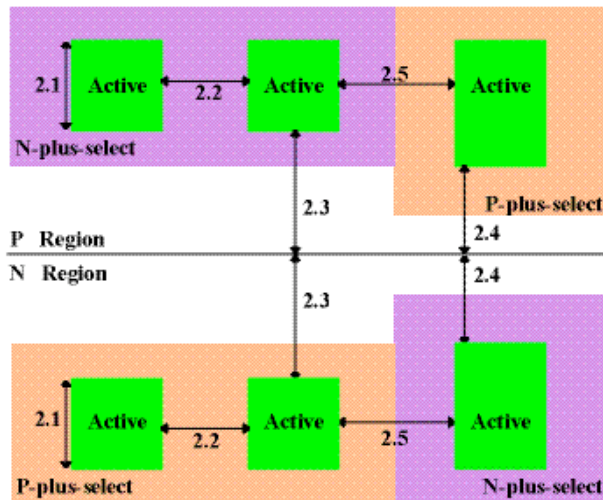

SCMOS Layout Rules - Poly

Rule	Description	Lambda		
		SCMOS	SUBM	DEEP
3.1	Minimum width	2	2	2
3.2	Minimum spacing over field	2	3	3
3.2.a	Minimum spacing over active	2	3	4
3.3	Minimum gate extension of active	2	2	2.5
3.4	Minimum active extension of poly	3	3	4
3.5	Minimum field poly to active	1	1	1

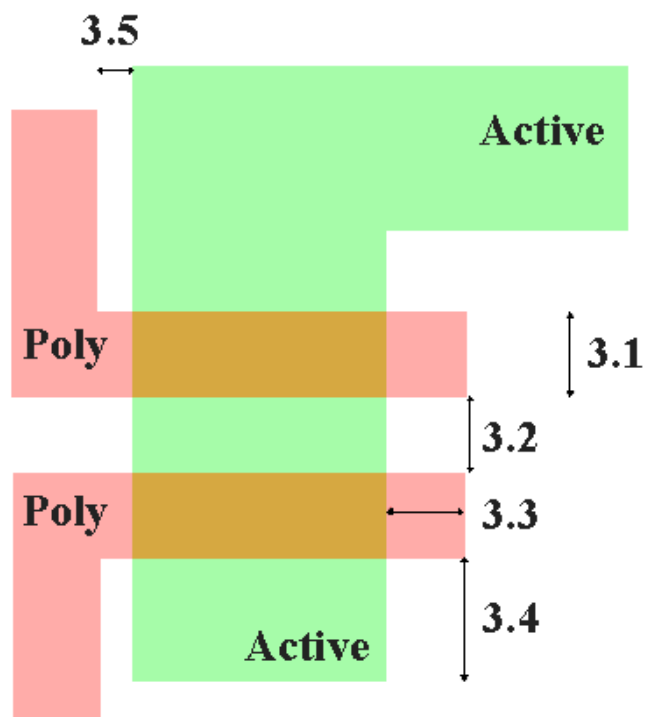

SCMOS Layout Rules - Contact to Poly


On 0.50 micron process (and all finer feature size processes), it is required that all features on the insulator layers (CONTACT, VIA, VIA2) must be of the single standard size; there are no exceptions for pads (or logos, or anything else); large openings must be replaced by an array of standard sized openings. Contacts must be drawn orthogonal to the grid of the layout. Non-Manhattan contacts are not allowed.

If your design cannot tolerate 1.5 lambda contact overlap in 5.2, use the alternative rules which reduce the overlap but increase the spacing to surrounding features. Rules 5.1, 5.3, and 5.4, still apply and are unchanged.


Simple Contact to Poly

Alternative Contact to Poly

Rule	Description	Lambda			Rule	Description	Lambda		
		SCMOS	SUBM	DEEP			SCMOS	SUBM	DEEP
5.1	Exact contact size	2x2	2x2	2x2	5.2.b	Minimum poly overlap	1	1	1
5.2	Minimum poly overlap	1.5	1.5	1.5	5.5.b	Minimum spacing to other poly	4	5	5
5.3	Minimum contact spacing	2	3	4	5.6.b	Minimum spacing to active (one contact)	2	2	2
5.4	Minimum spacing to gate of transistor	2	2	2	5.7.b	Minimum spacing to active (many contacts)	3	3	3

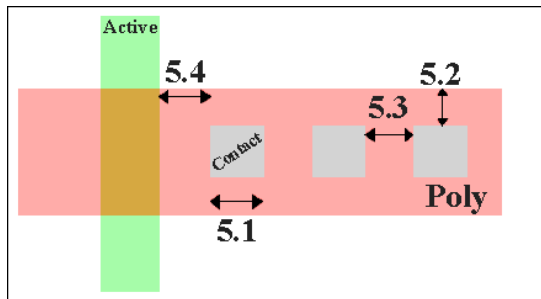

Simple Poly to Contact

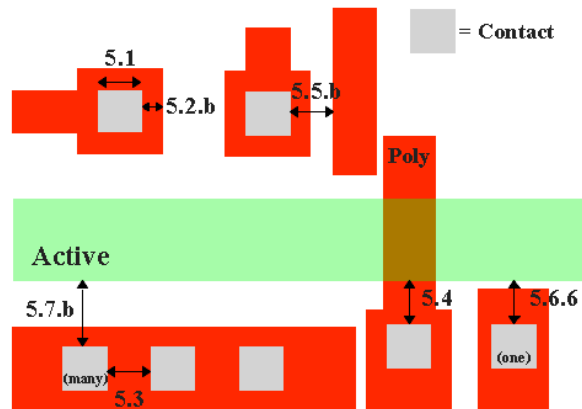

Alternative Contact to Poly

SCMOS Layout Rules - Contact to Active


If your design cannot handle the 1.5 lambda contact overlap in 6.2, use the alternative rules which reduce the overlap but increase the spacing to surrounding features. Rules 6.1, 6.3, and 6.4, still apply and are unchanged. Contacts must be drawn orthogonal to the grid of the layout. Non-Manhattan contacts are not allowed.

Simple Contact to Active

Alternative Contact to Active

Rule	Description	Lambda			Rule	Description	Lambda		
		SCMOS	SUBM	DEEP			SCMOS	SUBM	DEEP
	Exact				Minimum				

6.1	contact size	2x2	2x2	2x2	6.2.b	active overlap	1	1	1
6.2	Minimum active overlap	1.5	1.5	1.5	6.5.b	Minimum spacing to diffusion active	5	5	5
6.3	Minimum contact spacing	2	3	4	6.6.b	Minimum spacing to field poly (one contact)	2	2	2
6.4	Minimum spacing to gate of transistor	2	2	2	6.7.b	Minimum spacing to field poly (many contacts)	3	3	3
					6.8.b	Minimum spacing to poly contact	4	4	4

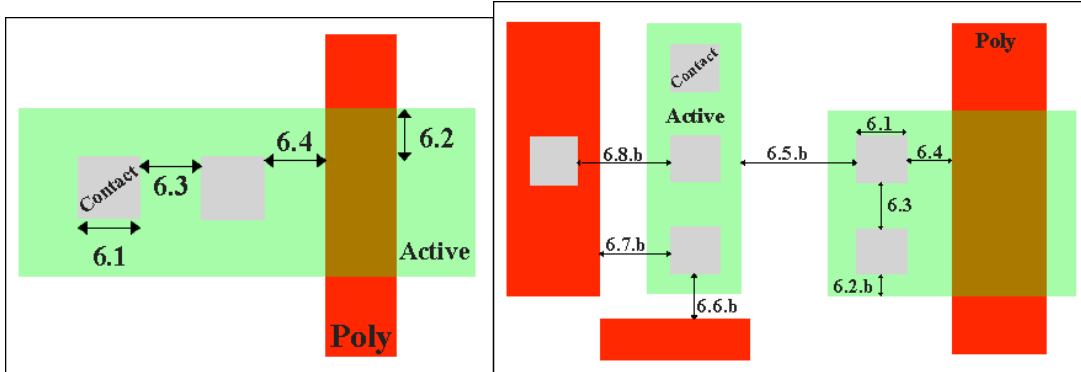


Simple Contact to Active

Alternative Contact to Active

SCMOS Layout Rules - Metal1


Rule	Description	Lambda		
		SCMOS	SUBM	DEEP
7.1	Minimum width	3	3	3
7.2	Minimum spacing	2	3	3
7.3	Minimum overlap of any contact	1	1	1
7.4	Minimum spacing when either metal line is wider than 10 lambda	4	6	6

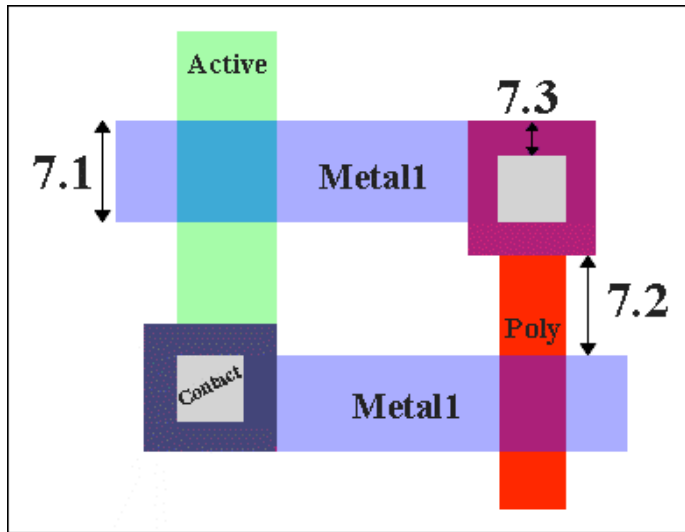

SCMOS Layout Rules - Via

Vias must be drawn orthogonal to the grid of the layout. Non-Manhattan vias are not allowed.

Rule	Description	Lambda					
		2 Metal Process			3+ Metal Process		
		SCMOS	SUBM	DEEP	SCMOS	SUBM	DEEP
8.1	Exact size	2 x 2	n/a	n/a	2 x 2	2 x 2	3 x 3
8.2	Minimum via1 spacing	3	n/a	n/a	3	3	3
8.3	Minimum overlap by metal1	1	n/a	n/a	1	1	1
8.4	Minimum spacing to contact for technology codes mapped to processes that do not allow stacked vias (SCNA, SCNE, SCN3M, SCN3MLC)	2	n/a	n/a	2	2	n/a
8.5	Minimum spacing to poly or active edge	2	n/a	n/a	2	2	n/a

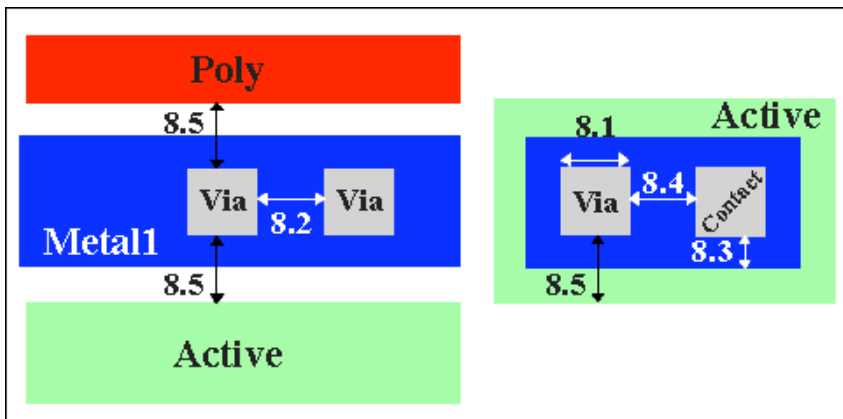

SCMOS Layout Rules - Metal2

Rule	Description	Lambda					
		2 Metal Process			3+ Metal Process		
		SCMOS	SUBM	DEEP	SCMOS	SUBM	DEEP
9.1	Minimum width	3	n/a	n/a	3	3	3
9.2	Minimum spacing	3	n/a	n/a	3	3	4
9.3	Minimum overlap of via1	1	n/a	n/a	1	1	1
9.4	Minimum spacing when either metal line is wider than 10 lambda	6	n/a	n/a	6	6	8



