



Contents lists available at ScienceDirect

Journal of Space Safety Engineering

journal homepage: www.elsevier.com/locate/jsse

On-orbit servicing ontology applied to recommended standards for satellites in earth orbit

David A. Barnhart, Rahul Rughani*

Department of Astronautical Engineering, University of Southern California Information Sciences Institute and Space Engineering Research Center, 4676 Admiralty Way, Suite 1001, Marina del Rey, CA 90292, United States

ARTICLE INFO

Keywords:

Satellite
Rendezvous
Servicing
Ontology
Safety

ABSTRACT

The Consortium for Execution of Rendezvous and Servicing Operations (CONFERS) is an industry-led initiative with initial seed funding provided by the Defense Advanced Research Projects Agency (DARPA) that aims to leverage best practices from government and industry to research, develop, and publish non-binding, consensus-derived technical and operations standards for On-Orbit Servicing (OOS) and Rendezvous and Proximity Operations (RPO). As part of the CONFERS effort, the University of Southern California's (USC) Space Engineering Research Center (SERC) conducted research into existing RPO methodologies and practices and OOS methodologies through literature review and interviews with practitioners. Following the first year of analytical input focused solely on RPO, the second year's activities have focused further into the full extent of attributes for satellite servicing and in-space docking (OOS). USC's focus was to develop a taxonomy of functions and attributes related to all aspects of technical elements and techniques required for past/current/anticipated OOS missions. A taxonomy database was created that allowed various key elements to be broken down into quantifiable data within common categories. Following the taxonomy creation, working with the Space Infrastructure Foundation (SIF) a review of existing standards in space along with other industries were analyzed and compared for possible matches. This standards gap analysis focused primarily from the end of the RPO maneuver to the point of physical contact or action between two spacecraft. These comparisons were then used to recommend where gaps in standards exist and where it might be most beneficial to create new ones, enabling spacecraft of various shapes and sizes to safely execute various OOS operations, and spur the industry between customers and providers. The field of space servicing is a rapidly growing field, with governments and numerous private entities developing robotic systems for mission extension vehicles and satellite repair. With an increased number of servicing missions forthcoming, a system of guidelines and standards on how to effectively and safely design on-orbit servicing activities is a next natural step to enable the expansion of this burgeoning industry.

1. Introduction

Next-generation space activities, where companies and organizations begin to provide services for each others space assets, are real and coming on-line. "Servicing" in the context of space constitutes a large and robust set of missions, all of which require some sort of interaction between different space objects. In general terms, to the burgeoning commercial space community worldwide these interactions are new; to-

date almost all space-to-space interactions have been executed by nation states or commercial companies working for and under nation-state processes and oversight. With the enormous economic and societal potential in new "servicing" mission sets possible, it makes sense to proliferate processes, standards, practices, procedures, and verification methods to the global commercial space community to encourage mitigation of any risks inherent in this high risk/reward domain of multiple RPO maneuvers and manipulations.

Acronyms/Abbreviations: AIAA, American Institute of Aeronautics and Astronautics; ANSI, American National Standards Institute; CCSDS, Consultative Committee for Space Data Systems; CONFERS, Consortium for Execution of Rendezvous and Servicing Operations; COPUOS, Committee on the Peaceful Uses of Outer Space; CVSA, Commercial Vehicle Safety Alliance; DARPA, Defense Advanced Research Projects Agency; DOT, Department of Transportation; ESA, European Space Agency; ESTEC, European Space Research and Technology Centre; EVA, Extravehicular Activity; FMCSR, Federal Motor Carrier Safety Regulations; IADC, Inter-Agency Space Debris Coordination Committee; ISO, International Organization for Standardization; ISS, International Space Station; JAXA, Japan Aerospace Exploration Agency; LEO, Low Earth Orbit; NASA, National Aeronautics and Space Administration; NHTSA, National Highway Traffic Safety Administration; NRL, Naval Research Lab; OOS, On Orbit Servicing; RPO, Rendezvous and Proximity Operations; SERC, Space Engineering Research Center; USC, University of Southern California.

* Corresponding author.

E-mail addresses: barnhart@isi.edu (D.A. Barnhart), rughani@usc.edu (R. Rughani).

<https://doi.org/10.1016/j.jsse.2020.02.002>

Received 11 October 2019; Received in revised form 27 January 2020; Accepted 12 February 2020

Available online xxx

2468-8967/© 2020 International Association for the Advancement of Space Safety. Published by Elsevier Ltd. All rights reserved.

Please cite this article as: D.A. Barnhart and R. Rughani, On-orbit servicing ontology applied to recommended standards for satellites in earth orbit, Journal of Space Safety Engineering, <https://doi.org/10.1016/j.jsse.2020.02.002>

Nomenclature

ATTRIBUTE	Quantitative metric or characteristic to enable a function to be executed or satisfied
CLIENT	Satellite or Platform to be Serviced
ELEMENT / MISSION ELEMENT	An activity within the overall orbital servicing architecture that requires multiple functions
FUNCTION	Activity required to affect a particular OOS element
SERVICER	Satellite or Platform that provides Service

1.1. Background: On-orbit servicing

Almost every major vehicle in a consumer's daily life uses re-purposing through value added re-seller equipment and/or constant maintenance; the family car, boat or truck is built on this concept. Entire companies of 2nd and 3rd tier industries are built not just on re-purposing components and hardware, but on the skill set to be able to effect the re-purposing to a host of platforms. All major systems in the world use this construct, with the single exception of satellites. Satellites costing anywhere from \$1M to \$1B are designed with a known lack of re-purposing, for planned disposal at a projected end of life [1].

In the past two decades, however, demonstration missions have been flown to explore *re-usability* of space systems...through the advent of *servicing* to extend or prolong a space platform's life [2]. One project even looked at *re-purposing* retired satellites to create completely new space elements [3,4]. Today there are multiple missions planned and under way by combinations of public, private and public/private entities to create a true business in space that follows the successful models of *servicing*, *maintenance* and *re-use* that Earth bound platforms have enjoyed (i.e. RSGS, Orbital ATK, Maxar, etc).

However, there are no general guidelines for how two unmanned satellite objects should intentionally and cooperatively approach or connect to each other, nor are there any recognized standards governing this. NASA does publish International Space Station (ISS) rules for approach and docking, but these are specific to the ISS, and were developed for maximum safety of human life, not for a commercial space infrastructure. The Inter-Agency Space Debris Coordination Committee (IADC), the Committee on the Peaceful Uses of Outer Space (COPUOS) and the International Organization for Standardization (ISO) all have published and are actively examining Space Debris Mitigation and Long Term Sustainability Guidelines. However, these focus on how operators can avoid generation of, and/or possible mitigation of debris, not on how two objects should approach each other with the intent to perform servicing [5].

Why does it matter for satellites? The consequences of an action that causes debris on the Earth (car, ship or aircraft) are generally confined to the local area of the accident. That is, pieces of cars that crash (for example) fall to the ground and can be pushed to the side of the road; they do not stay hovering in the air in the lane where other drivers could hit them. Likewise at sea, collisions generally are swallowed by the ocean and thus pose no resultant danger to future vessels. Yet in space, every piece of debris can affect an entire orbit; and every orbit is used by the global community of nations to fly their spacecraft through this unique "space commons".

This represents a unique global problem; the "commons" of space is both available to all nations, yet not controlled or cleaned by any nation. Thus, events in orbit that create additional hazards affect far more than the local environment; indeed they are global in affect. The cur-

rent treaties that exist for Space may not completely encompass the new realities that technologies and capabilities are now enjoined in creating "on orbit servicing" and "rendezvous and proximity operations". Thus, CONFERS aims to bridge that potential gap and provide guidance to mitigate potential problems that affect all satellites in Earth's orbit.

1.2. CONFERS: What is it?

The Consortium for Execution of Rendezvous and Servicing Operations (CONFERS) is an industry-led initiative with initial seed funding provided by the Defense Advanced Research Projects Agency (DARPA) to leverage best practices from government and industry to research, develop, and publish non-binding, consensus-derived technical and operations standards for OOS and RPO [6,7]. The goal for these standards is to provide the foundation for a new commercial repertoire of robust safe space-based capabilities to encourage and support the future in-space economy. These new standards and guidelines would function under oversight of the government, and would supplement existing standards and guidelines already in place. CONFERS is open to participation by private sector stakeholders in the international satellite servicing community. All companies and academic institutions developing, operating, insuring, and purchasing OOS and RPO capabilities are encouraged to join and contribute their experience and expertise.

1.3. USC's role in CONFERS

As the technical advisors for the CONFERS consortium, USC SERC was given the task to assess the current state-of-the-art, uncover standards or best practices, and recommend possible actions to consider as potential safety standards in RPO and OOS for the CONFERS community to consider. The task was broken out into two single year efforts, with the first year focusing on RPO and second year OOS. Following the first year's work and results [8,9], this paper focuses on the results of the OOS work in the second year, with the methods listed below.

1.4. First year efforts – Recap

Over the first year effort the team at the SERC executed a number of investigations that led to further efforts by the CONFERS team as a whole. These included: identifying and seeding a specific RPO/OOS lexicon process, encouragement to develop a "standard" set of mission element definitions and diagrams, and development of a set of metrics to quantify RPO safety for basic approach and docking missions, similar to those that satellite servicers would undertake. The resultant metrics created scaleable and unitless ratio's that could apply to any particular "Client" and "Servicer" combination through identification of potential contact and external interference. Three unitless metrics were identified to be used both in the design phase of RPO platforms as well as prior to each RPO engagement to give some measure of "goodness" or "risk assessment". These are detailed in a previous publication [8].

1.5. Second year efforts

Following USC's efforts towards RPO for the first year of the CONFERS program, the second year efforts focused on the larger context of OOS. The second years effort consisted of the following investigations and analysis:

- Surveying existing and planned standards that may be applicable to satellite servicing missions;
- Evaluating space domain and analogous industries for seed ideas to inform potential standards;
- De-constructing the initial mission element diagram/architecture into a set of functions and attributes;
- Seed attributes with quantitative values based on engineering practices, processes, standards and other analysis;

- (v) Perform detailed Monte-Carlo and decision tree analysis to suss out the most critical attributes for safety related standards to inform CONFERS members to consider.

2. What is safety?

The question, what does the term “space safety” mean in relation to the “servicing” function, is critical as it sets the stage for an approach to what possible risk areas to identify as a standard or practice, and informed our approach to the analysis.

In our evaluation we acknowledge two forms of safety, but focus on one in particular in this paper. The first is the historical representation set out by the Outer Space Treaty of 1967 [10] and the Liability Convention of 1972 [11] that recognized *safety* in the context of not just on-orbit damage and harm to other satellites and/or astronauts, but harm to institutions or individuals on the ground from normal or abnormal debris re-entering the Earth’s atmosphere. The second form of *safety* we recognize is one that is typically referred to inside companies or government labs that build space vehicles; here the focus of the term *safety* typically is referencing the *element* or *spacecraft* itself. Satellite safety, in the context of the commercial spacecraft industry, typically examines risks or attributes that could cause harm to the satellite itself, or the failure of its operation or intended mission to be successful over time, thus impacting economics and revenue. Normally these are from internal attributes interacting with the external environment (i.e. temperature, radiation, sunlight, RF etc.), or just getting to the orbit through launch. Notwithstanding the Treaties and agencies all working to avoid debris, it is only in more recent years that the commercial industry at large has to contend with an increasing probability of an unplanned encounter with a physical object in orbit, like another satellite or space debris. This specific risk was not always in the builders’ “safety” lexicon as having to harden against a collision, although in recent years they have had to consider micro-debris mitigation.

At the moment we are witnessing a large influx of new satellites and constellations planning to be launched into Low Earth Orbit (LEO). Thus, the internal manufacturers definition of “satellite safety” broadens into the larger orbital regime as more debris and traffic (i.e. more satellites) must be considered. (Note, the authors do not make any assertion regarding “traffic management”, except to note that it now must be considered for spacecraft that wish to maneuver to service others, in an ever increasing crowded orbital regime).

The context then of *safety* that we looked at which was most analogous to on-orbit servicing is associated with “reaching out and touching”. Rendezvous and Proximity Operations (RPO) is the art and technique of getting close to and setting up the ability to “touch” another satellite or space object in orbit to affect an action. The entire new market and mission segment of on orbit servicing predicates its existence on effective and low-cost actions to get up close and personal with objects on orbit, on a regular basis. The key is that it must do so in a “safe” manner...

To-date RPO has mainly been the sole domain of nation-states and large government agencies (RosCosmos and NASA as examples) which have looked at “safety” relative to docking two objects since the start of manned space activities. By and large this has happened without problems, with a few notable exceptions [12,13]. However, the context here in looking at “safety” for RPO is the reality that it is transitioning quickly from just a singular sporadic “mission” to regular and higher tempo “market” operations with new companies, universities and organizations around the world. Thus, not only is the operating realm a bit more cluttered relative to how RPO has occurred generally in the past (i.e. more debris, new constellations etc.), but the published and available expertise in RPO (through handbooks or manuals as examples) do not currently exist.

For the domain of “commercial servicing”, another unique attribute stems from space activities generally being “out of sight”, which translates to the problem of orbital “safety” as being out of mind. While other

industries (marine, rail, automotive etc.) may have similar risks for collisions or accidents, the lack of immediate visual knowledge in space means there is, to some extent, a lack of global conscious oversight concerning what the new Servicing industry is doing during RPO.

Thus, “safety” in the context of On-Orbit Servicing (OOS) has two masters; minimizing the risks of generating debris on orbit of any kind, and applying some level of cogent self-regulation to avoid oversight being thrust upon all parties via Governmental regulations.

3. Existing and analogous Standards

The first major analysis in the 2nd year surveyed existing and planned standards for applicability to satellite servicing and RPO missions. Within the space domain roughly 50 standards were initially identified applicable in some way to RPO and OOS [14].

3.1. Existing standards in the space domain

Table 1 shows an initial look at space standards identified as applicable to RPO or OOS, from various organizations, including the International Organization for Standardization (ISO), the American Institute for Aeronautics and Astronautics (AIAA), the American National Standards Institute (ANSI), and the Consultative Committee for Space Data Systems (CCSDS). For reference we have included as many as possible. [15–85].

Of these, only about one third were found to have quantitative values with a physical attribute or process associated with them, whereas the rest formulated outlines for what analysis to perform to get a quantifiable metric. Non-quantified standards lead to different interpretations of a quantifiable attribute by different entities, resulting in a wide variety of systems that are compliant with the standard, but operate with very different parameters. For example, the ISO standard on *Electromagnetic Compatibility (ISO 14302:2002)* identifies specific frequency ranges and emission energies which, if exceeded, could damage nearby spacecraft [17]. Compare this to another ISO standard on the *Prevention of Break-Up of Unmanned Vehicles (ISO 16127:2014)* which is meant to specify how to safely decommission unmanned spacecraft to prevent creation of debris, but does not specify how to do this. Rather, it uses phrases such as

“The risk of potential malfunctions shall be considered within the break-up prevention plan, which shall include a contingency plan to mitigate against the risk of the malfunction causing a break-up”

without specifying any criteria to design for or verify against [67]. The goal of CONFERS is to build upon existing standards such as these to identify best practices for the industry to codify qualitative methods and metrics to achieve quantifiable safety goals, for as many physical attributes involved in “servicing” as practical.

3.2. Analogs to space

Recognizing other vehicle platforms and domains that have faced similar challenges, the team drew upon additional comparisons by looking at standards that might hold analogous functions or attributes from automotive, aviation, and naval industries to space. Quantitative evaluation into some of these terrestrial domains helped to focus the OOS ontology into similar decomposition of actions to functions and attributes.

Although there are no specific standards in the Space domain for RPO and OOS at the moment, there are countless standards in terrestrial industries that provided examples to draw from. These were considered as *analogous standards*, with equivalencies in gross functions, processes or elements to the RPO or OOS domain, providing inspiration for design guidelines and best practices to apply to space-based applications. To pick a specific example, consider the backup sensors on cars; they have specific quantitative standards that specify a required ranging resolution

Table 1

First look for Space Standards that may address RPO and OOS Elements.

Standard	Identifier
Spacecraft Identification Field Code Assignment Procedures	CCSDS 320.0-M-7
Mitigation of Impacts	ISO 11227:2012
Proton Flux at GEO	ISO 12208:2015
Electromagnetic	ISO 14302:2002
Compatibility	ISO 24637:2009
	ISO 24637:2009
	AIAA S-121A-2017
Launch Vehicle Interface to Spacecraft	ISO 14303:2002
Structural Design	ISO 14622:2000
Launch Vehicle Loading Test	ISO 14953:2000
Exchange of Mathematical Models for Dynamic and Static Analysis	ISO 14954:2005
Pressurized	ISO 14623:2003
Structures	ISO 24638:2008
	ANSI/AIAA S-081B-2018
	ANSI/AIAA S-080A-2018
Compatibility of Materials	ISO 14624
Surface Cleanliness of Fluid Systems	ISO 14952
Contamination and Cleanliness Control	ISO 15388:2012
Stress Analysis	ISO 16454:2007
Simulation	ISO 16781:2013
Connectors for Serviceability	AIAA G-072-1995
Grasping, Berthing, Docking Interfaces	AIAA G-056-1992
On-board Communication	CCSDS 850.0-G-2
Orbit Data Messages	CCSDS 502.0-B-2
Tracking Data Message	CCSDS 503.0-B-1
Attitude Data Messages	CCSDS 504.0-B-1
Cojunction Data Message	CCSDS 508.0-B-1
Exchange of Orbit Information	ISO/TR 11233:2014
	ISO 26900:2012
Telerobotics Lexicon	AIAA S-066-1995
Concept of Operations	ISO 14711:2003
Operability	ISO 14950:2004
Documentation	ISO 23041:2018
Space	ISO/TR 18146:2015
De-	ISO/TR 20590:2017
bris	ISO/CD 20893
Mitigation	ISO 24113:2011
Ground Testing (General)	ISO 15864:2004
Ground Testing (Fluids)	ISO 15859:2004
Safety of Launch Site Operations	ISO 14620-2:2011
Flight Safety During Launch	ISO 14620-3:2005
Launch Integration Practices	AIAA R-099-2001
Early Operations	ISO 10784-1:2011
Space Solar Panels - ESD testing	ISO 11221:2011
Prevention of Break-Up of Unmanned Vehicles	ISO 16127:2014
	ISO 21347:2005
Avoiding Collisions	ISO/TR 16158:2013
Measuring Residual Fuel	ISO 23339:2010
Disposal of GEO satellites	ISO 26872:2010
Telerobotics	CCSDS 540.0-G-1

needed to make out hazards while reversing a motor vehicle [86]. Translating that functional example to the Space domain, the *backup sensor* analogy may be extended to sensors used onboard a Servicer used for final range approach during many RPO operations. This function and its attributes may benefit from a set of standards specifying a recommended ranging/distance resolution relative to what may contribute to a risk during rendezvous. This is but one example of a potential functional element on a Servicer that may benefit from some quantitative attributes being assigned and thus considered for standards, better enabling a large number of new entrants in OOS to validate their component selection and approaches to execute RPO operations, safely.

An interesting observation of these analogous industries was an identified interaction between Government regulators and an industry consortium that showed a high degree of quantitative self governance, which may provide inspiration for the satellite servicing community. The Commercial Vehicle Safety Alliance (CVSA) is a multinational commercial consortium that supports and supplements government standards from US and Canada, primarily for commercial over-road transport connection interfaces. In addition to providing inspection services

and self-regulation for their industry, the CVSA publishes supplemental guidelines to accompany government standards for vehicle connection safety, as many of these standards are open-ended and have many different potential implementations. To provide a specific example lets look at Section 393.70(d) of subpart F of the Federal Motor Carrier Safety Regulations (FMCSRs):

§393.70(d) requires that every full trailer must be coupled to the frame, or an extension of the frame, of the motor vehicle which tows it with one or more safety devices to prevent the towed vehicle from breaking loose in the event the tow-bar fails or becomes disconnected. The safety device must be connected to the towed and towing vehicles and to the tow-bar in a manner which prevents the tow-bar from dropping to the ground in the event it fails or becomes disconnected [87].

Although this standard requires that some form of two-fault tolerant system must be implemented to prevent accidental disconnection of the towed trailer, no specific method of implementing this is providing, leaving this an open-ended problem for an end user. To simplify

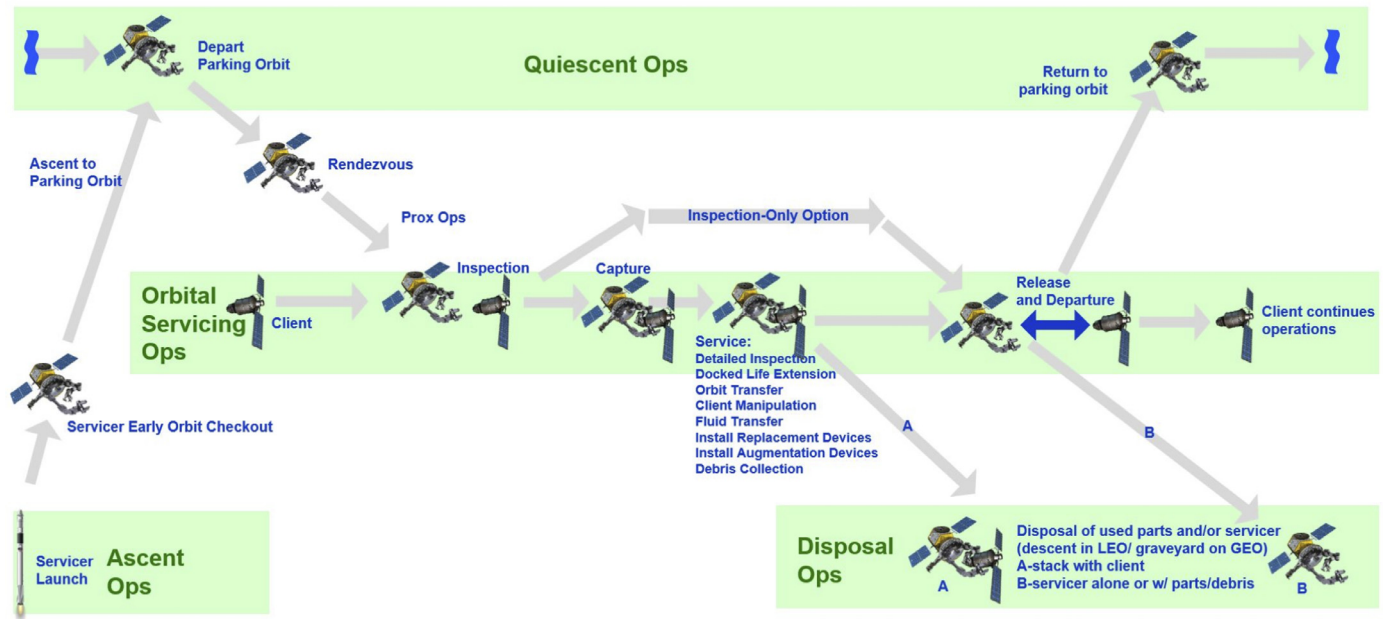


Fig. 1. CONFERS OOS OV-1.

operations for vehicle operators, the industry based CVSA has issued detailed qualitative guidelines pertaining to §393.70(d) of the Federal Motor Carrier Safety Regulations:

The Federal Motor Carrier Safety Regulations (FMCSRs) do not specify a minimum number of fasteners. However, the industry recommends that a minimum of ten 5/8 inch bolts be used. If $\frac{1}{2}$ inch bolts are used, the industry recommends at least 14 bolts. [The CVSA] has adopted these industry standards as a part of its vehicle out-of-service criteria [88].

These guidelines do not overrule federal regulations, nor are they strict regulations that all industry members are obliged to abide by; rather they are informational and easy to implement, allowing standardization of parts and tooling for those who volunteer to follow the guidelines for this one function (i.e. towed vehicle safety). The authors highlight this interaction between Government regulators and industry consortium as a positive collaboration where industry actually sets quantitative metrics.

4. Mission element taxonomy creation

As it was identified in the first year that a standard "architectural diagram and definition" did not exist that was accepted globally, the CONFERS members created and approved a mission architecture operational view (OV-1) [89] to help define individual elements to effect a "service" action. Fig. 1 describes a top level set of elements where each executes a specific orbital related action, along the way to a servicing event. Starting with this OV-1, our next step was to de-construct each element into finer functions and attributes, suitable for quantitative metrics to begin to apply.

4.1. Functions and attributes from mission elements

Deconstruction of the OV-1 (see Fig. 1) the team created and identified what are referred to as "function:attribute" pairs for each element. Briefly, "functions" are defined as an activity required to affect a particular phase on OV-1 elements, while "attributes" are defined as the quantitative metric or characteristic required to enable that function. For example, the phase *Depart Parking Orbit* was identified to have the functions *Pre-Service Preparations*, and *Transit Conjunction Analysis*. Then

one attribute of *Pre-Service Preparations* can be identified as *Minimum Fuel Remaining at Client Orbit*. This translates to the following: In order to depart the parking orbit, the Servicer must perform pre-service preparations, which in quantitative terms means it must evaluate the amount of propellant the maneuver will take to ensure sufficient propellant will remain at the end of the maneuver to perform the desired servicing operations. (As an analogy, this is similar to the minimum fuel remaining required for planning a flight to one airport by aircraft, to account for weather diversion to another airport).

Fig. 2 shows a sample of the resultant initial taxonomy that links OV-1 elements, functions, and associated attributes to each other. The full taxonomy chart can be found in Appendix A. Multiple references helped to identify what additional functions may be needed for each element [90,91].

For our analysis, formal definitions of *functions* and *attributes* are as follows:

Function: An activity required to effect a particular OV-1 OOS element. There can be multiple functions required for each element. Functions are defined as actions that are either primary or secondary activities that correspond to a particular event in the OV-1 required for a particular service.

Attribute: The quantitative metric or characteristic to enable a function to be executed or satisfied. There can be multiple attributes assigned to each function.

In many cases, finding attributes are straightforward, and many have measurable value metrics that can be logically assigned, estimated, or calculated. What is not straightforward is identifying attributes that affect *safety* as defined in our original OOS analysis context.

To provide an example of a set of functions and attributes pulled out of a servicing action from the OV-1 diagram, let's look at one function identified for *illumination*. Illumination of the Client is generally required in a servicing action for verification of successful approach and contact. Illumination could include ambient light (Sun), artificial light (provided on site), or alternative wavelength (i.e., infrared). Initial attributes identified that provide a quantitative description of the *illumination* function are:

- (i) Amplitude/Brightness (Lumens/m²)
- (ii) Distance between light source and Client object to be illuminated
- (iii) Active guidance and control enabled to avoid loss of illumination

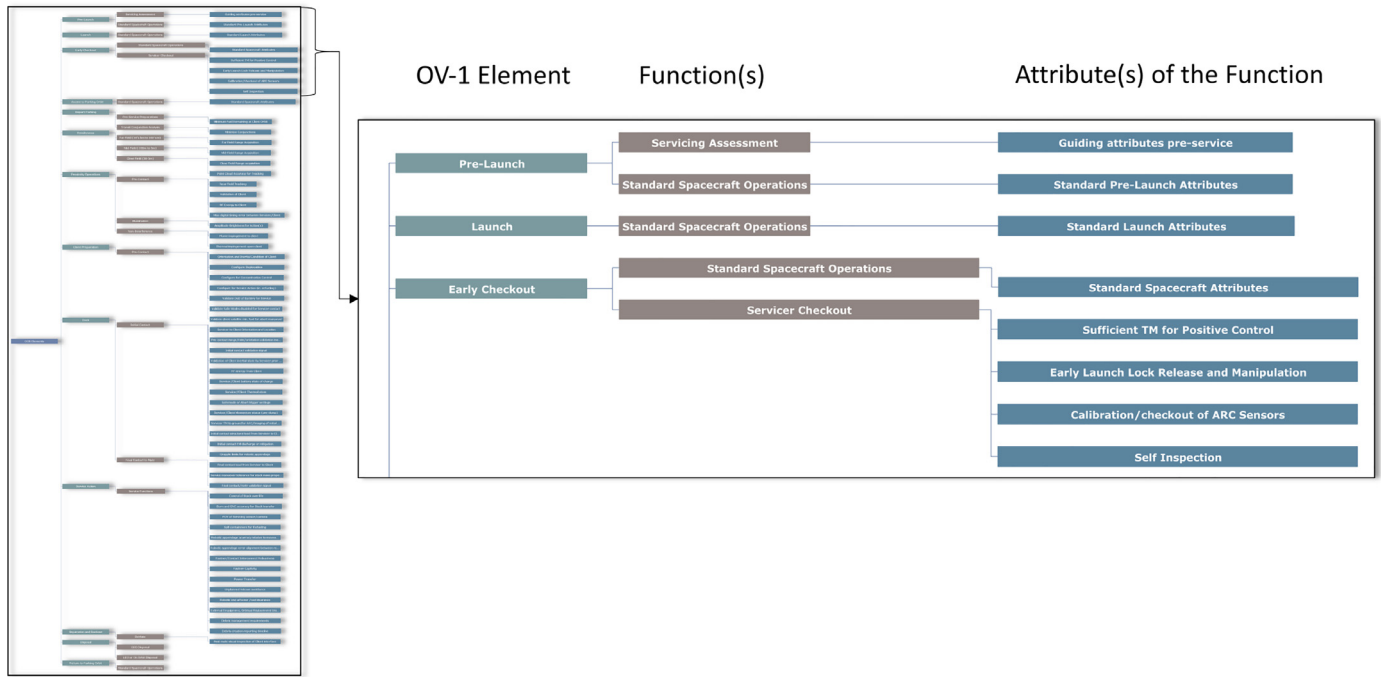


Fig. 2. OOS taxonomy tree [Partial].



Fig. 3. Sunlight in LEO.



Fig. 4. EVA headlamp.

For the *brightness* attribute, two common occurrences found in historical analyses are 126000Lumens/m² for sunlight in Low Earth Orbit (LEO) [92] (Fig. 3) and 860Lumens/m² for standard space shuttle Extravehicular Activity (EVA) suit helmets [93] (Fig. 4). This breakdown would lend itself to the assessment and assignment of a minimum Lumens for "safe" OOS service. In the case of the Astronaut EVA, Hamilton-

Sundstrand assessed a 1 meter standoff from an object from an astronaut using his/her vision only required a minimum of 860Lumens/m².

4.2. Quantitative assignment of attributes

After breaking down the OV-1 diagram into Functions and Attributes, quantitative values were proposed and initially assigned for each of the attributes (i.e. the *Illumination* example). This was done by looking for existing space and analogous domain standards, specifically those identified earlier as having quantitative values associated with them. The goal, by applying this method to all the functions and attributes from the OV-1 taxonomy analysis, was to see if a correlation could be found between each OV-1 element and a set of quantitative metrics to numerically assess various aspects of a function for its "safety". The process was to take each attribute and through research from a number of sources try to find a metric that may apply.

To exemplify this process, let's continue the previous attribute example where a value of 860Lumens/m² was assigned for the *brightness*, based upon previous work for astronaut close approach work [93]. We also related this to an analogous standard in the automotive industry, issued by the Department of Transportation's (DOT) National Highway Traffic Safety Administration (NHTSA), on automobile headlamps [94]. Together, the quantitative metric for the *brightness* attribute of the *illumination* function would be proposed as:

The Amplitude-Brightness required for sufficient human validation of optical images should be at least 860Lumens/m².

To provide another example let's look at pose estimation in the OV-1 element *Client Preparation*, which we broke down into the function and attribute of *Pre-Contact* and *Orientation of Client and Appropriate Inertial Condition*, respectively. This attribute was given a quantifiable metric based on research done by the Integrated 3D Sensors Suite (I3DS) team funded through the ESA Horizon 2020 initiative [91,95]. Given this input, a quantitative metric is proposed as:

The Client must demonstrate and maintain stability in pitch/yaw/roll to <1 deg/second. If consumable ADACS is used,

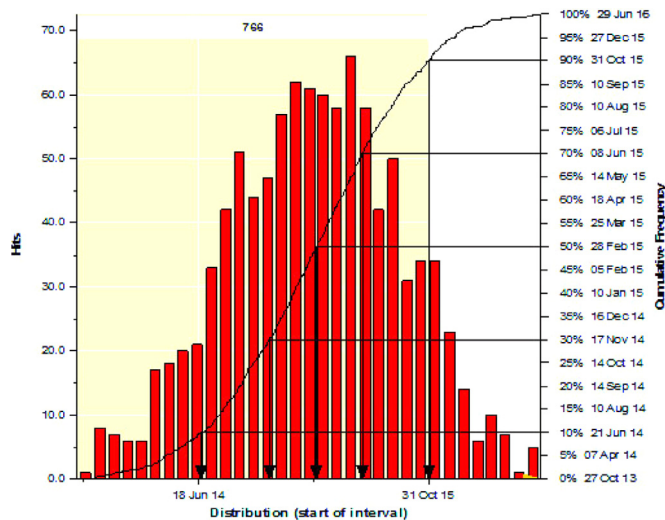


Fig. 5. Monte-Carlo distribution [Representation only].

sufficient margin exists that is >10% required during the entire time of the Servicing operation plus 4 days.

This process was applied to as many of the function/attribute pairs as possible, and the results of this are detailed in [Appendix B](#).

4.3. Future work: Monte-Carlo and decision tree analysis

While an initial set of quantitative metrics were created ([Appendix B](#)) what remains is to identify the most relevant attributes for OOS safety. One methodology using a combination of Monte-Carlo analysis and Decision Trees to select the most critical safety attribute was proposed but not pursued in this years analysis. For future work this process could be accomplished by taking the list of Attributes created in the function:attribute analysis and running Monte-Carlo distributed simulations (given a set of bounds) on these attributes to see how this affects OOS mission outcome. Then after performing this analysis for all of the attributes, the data would be fed through a decision tree matrix in order to determine the sensitivity of each attribute, identifying those that have the greatest effect on mission success and thus safety. [Fig. 5](#) shows a representation of an expected data distribution from a Monte-Carlo analysis.

These so called *sensitive* attributes might then form the basis of the guidelines and best practices for On-Orbit Servicing (OOS).

5. First look at interfaces

The SERC performed a preliminary analysis on interface mechanisms used for On-Orbit Servicing. The goal of this was to start an ontological breakdown of existing interfaces to begin to classify common functions and attributes, similar to the method used previously. Interfaces have multiple requirements and responsibilities that must operate within the various cyber and physical elements, and within the environment of space. In terms of affecting "safe" touch/contact/grapple or connection between two space objects, interfaces may be the most important element to develop and thus provide cogent guidelines on their operation or creation. [Fig. 6](#) depicts and example of various operational and environmental considerations that affect interfaces.

This started out as a survey of docking interfaces with information published or publicly available on a website (see [Appendix C for the full survey results](#)). The approximately 25 interfaces found in the survey covered a wide range of sizes, from CubeSat-class docking interfaces on the lower end to space station human rated interfaces on the upper end, and everything in-between [96–102]. However, this list is not comprehensive, and contains only interfaces with information readily available

Example functions where Interfaces relate to "Mission Elements":

- TLE set identification and Orbit Coordination
- Ground Communication
- Launch Vehicles
- Definitions and nomenclature
- Rendezvous Sensors
- Information transfer
- Robotic Grippers
- Mechanical Appendages
- Cameras
- Thermal/Fluid Transference
- Magnetic Interconnects
- ETC

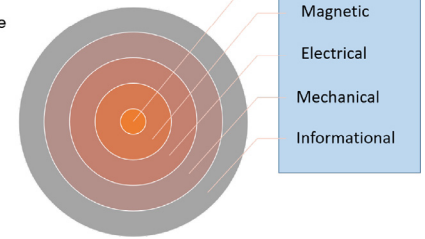


Fig. 6. Interface considerations for "Safe" OOS operations.

and searchable on the web; there are likely more interfaces which are proprietary. From this top level survey and the identified considerations, an initial set of attributes and quantitative metrics were identified relative to specific environmental inputs for initial discussion relative to OOS. (Shown below in [Table 2](#)).

It was found that the term *interface* is very wide-ranging, and has different meanings to different groups of people. This made it difficult to classify *features* (or properties of) and *requirements* (regulated or mandated attributes of) for interfaces. Traditionally, though there is no consensus on a formal definition, interfaces have been considered as hard contact mechanical devices, such as docking rings or robotic end-effectors. Recently, however, non-traditional approaches have been tested or implemented, such as the use of electro-adhesion [103], gecko gripping material [104], even spring-loaded harpoons [105]. These advances, though exciting, make classifying interfaces and defining safety properties for them difficult in a traditional sense. Instead of defining a set of best practices for interface design based on existing designs, our OOS interface work was broken down into suggested *requirements* and *features*, for which quantitative values can be defined without restricting the method or design by which the interface achieves this. For example, a feature of the electrical requirements can be the *RF Shielding Robustness*:

In order to shield the on-board electronics from potential interference of the RF emissions from the Client spacecraft, the electronics must be able to handle an applied electric field of up to 50V/m for emission frequencies between 2Ghz - 4Ghz or 5.5Ghz - 5.9Ghz, and up to 50V/m for all other frequencies [79].

These *requirements* and *features* were created to fit a wide variety of OOS interfaces, primarily to address any aspects of the interfaces themselves that could affect system safety through avenues such as release of mass, inadvertent application of force, electrical discharge, etc. These follow top-level categories such as Mechanical, Electrical, Pressure Systems, Thermal Control, and so on, creating functions that are applicable to all (or a wide range) of the interfaces identified through the survey. Its possible that as the survey expands by adding new systems, or existing systems that do not have information available online, these features and quantitative assessments of them will change.

6. Recognizing similar work globally

While the SERC effort has been performing this RPO and OOS research under the umbrella and funding from CONFERS, other groups worldwide have been pursuing similar avenues of research simultaneously. Most notably, the European Space Agency (ESA) has been doing RPO and OOS research through the European Space Research and Technology Centre (ESTEC) in The Netherlands [106], and the Japanese Aerospace Exploration Agency (JAXA) has been conducting their own independent review of OOS missions to determine standards and best practices [107,108].

Table 2
Interface Survey Attributes

	Possible Interface Requirements for Safety	Quantitative Development Approach
Mechanical	Initial Contact Impact Force	TBD % less than client contact point yield with a TBD factor of safety
	Grip force	TBD % less than client fixture yield
	Two failure tolerant connection	99% 1st mechanism hold over \pm TBD lateral force, 100% 2nd mechanism hold for TBD hours, or until primary mechanism restored
	Contact sensing	\pm TBD mm in longitudinal, \pm TBD mm in lateral, and \pm TBD radians in rotational
	Two failure contact sensing	99% 1st mechanism hold over \pm TBD lateral displacement, 100% 2nd mechanism hold for TBD hours, or until primary mechanism restored
Electrical	Total Overcurrent Capability	2x nominal current transport over interface, with fuse inline
	Thermal capability	Can handle 3x current transport over interface connection/wiring
	Ripple on Current/Voltage	Less than TBD % on current/voltage
	RF shielding robustness (Electric Field from Client source)	Able to handle up to 50V/m between 2-4GHz or 5.5-5.9GHz, 20V/m all other frequencies
	Two failure power inhibit on contact	99% mechanical contact inhibit for force/shock/etc, 100% secondary electrical inhibit on failure of 1st
	Static discharge capability upon initial physical contact	Handle up to 10kVolts
	Data input protection	Can handle incorrect / malicious data from external system
	Polarity Reversal Capability	method in place to handle reversed polarity on interface between two spacecraft
Fluid/Pressure	Max. overpressure	2.5x over rated pressure capacity on fittings and lines
	Automatic overpressure release	Leak before burst, at TBD times rated pressure
	Fluid containment	Capture TBD % of outgass/burnoff at connect/disconnect; Zero release of contaminants within TBD meters of Client optics
	Discharge thrust upon valve failure	Less than TBD Newton
	TBD	
Thermal	Thermal Transfer Limit	If able to transfer thermal from client, interface to handle up to TBD % over designed for W-m2
	Temperature measurement accuracy	\pm 10% of the actual thermal condition contacted
	Thermal Isolation Capability	If thermal is isolated, able to isolate from Client up to TBD times Servicer thermal transfer at interface
	Thermal Radiation Consideration	Minimize thermal radiation towards client spacecraft and/or design to allow thermal radiation incoming from client spacecraft. Possible characterization is max W/m ² based on Servicer thermal design, or some area factor of safety
Magnetic	EM field external to interface geometry	Less than TBD % EM field beyond interface geometry, or less than TBD Gauss value applied at cm ² surface
	Induced electrical field or current	Less than TBD micro-T induced onto the Client surface or electrical lines
	Structure Degaussing	Less than TBD Gauss magnetic field internal to structure

Additionally, within the United States, a group at the National Aeronautics and Space Administration (NASA), specifically at the Goddard Space Flight Center (GSFC), has performed research on On-Orbit Servicing for satellites, part of which was used to support this research [90].

Efforts were made to contact researchers in Russia and China doing similar work, but so far no contact, either to perform joint research with USC on an academic basis, or to join the CONFERS consortium as industry members, has occurred.

In addition to making guidelines and best practices for use by members of the CONFERS consortium, the CONFERS standards group has presented findings at an International Organization for Standardization (ISO) conference in London in June of 2019, where the CONFERS principles and practices were accepted into working draft by the ISO committee for consideration [109].

7. Conclusion

USC's activities during this phase of CONFERS research developed a top level taxonomy to provide a foundation to uncover critical quantitative and qualitative metrics related to all aspects of on-orbit servicing. The notion of "safety" as it relates to the global commons around Earth and its context to the relatively new field of RPO for pure commercial purposes was preferred. A preliminary look at critical attributes for "interfaces" of any kind was offered without focusing on any particular flavor or method to achieve the interface function. A suggested path forward to take the very large set of potential attributes and work through a convergence of traditional aerospace simulation with informatics decision tree analysis was offered as a way to find the most "safety critical" technical activities to pursue as possible standards work in the future.

The Space community has a large number of standards already in place that this community can utilize; from data formatting, communications, debris mitigation recommendations, etc. The challenge going forward in the RPO/OOS domain is finding and creating those standards

that are critical to maintain the "safest environment" in Earth orbit for this new community and market to thrive.

Funding Sources

Funding is provided by the [Defense Advanced Research Projects Agency \(DARPA\)](#), as part of the CONFERS contract (HR001118C0037). This contract is assigned to Advanced Technology International (ATI) which manages the CONFERS consortium. We at USC Space Engineering Research Center (SERC) have been tasked with performing fundamental research to support the consortium, using funds provided by [DARPA](#).

Declaration of Competing Interest

The authors declare that they have no known competing financial interests or personal relationships that could have appeared to influence the work reported in this paper.

CRediT authorship contribution statement


David A. Barnhart: Conceptualization, Methodology, Investigation, Resources, Writing - review & editing, Supervision, Project administration, Funding acquisition. **Rahul Rughani:** Conceptualization, Methodology, Software, Validation, Investigation, Data curation, Writing - original draft, Visualization.


Acknowledgements

The authors wish to thank Todd Master and Srimal Choi from [DARPA](#), Erin Fowler from the Naval Research Lab (NRL), Brian Weeden and Ian Christensen from Secure World Foundation, and Frederick Slane, Michael Kearney and Ramon Krosley from the Space Infrastructure Foundation for their support and inspiration on this project.

Appendix A. Taxonomy Tree

Based on the OV-1 diagram identified by the CONFERS consortium (Fig. 1), the team at USC broke each step down into simpler elements in order to be able to quantify each step for comparison between different missions. This was done by breaking each OV-1 mission step into *functions* and *attributes*. *Functions* are activities that are required to effect a particular OV-1 OOS element. There can be multiple functions required for each element. For example, in the *Rendezvous* phase of OOS, the functions identified are: Far-Field Approach, Mid-Field Approach, and Close-Field approach. Each *function* is broken down further into at least one *attribute*. *Attributes* are quantitative metrics or characteristics used to identify when a function is satisfied. For example, the corresponding *attribute* to the Far-Field Approach *function* is the Far-Field Range Acquisition, which is a measurable quantity, and must satisfy a certain criteria to confirm that the *function* has been completed successfully. The exact criteria can be found in [Appendix B](#).

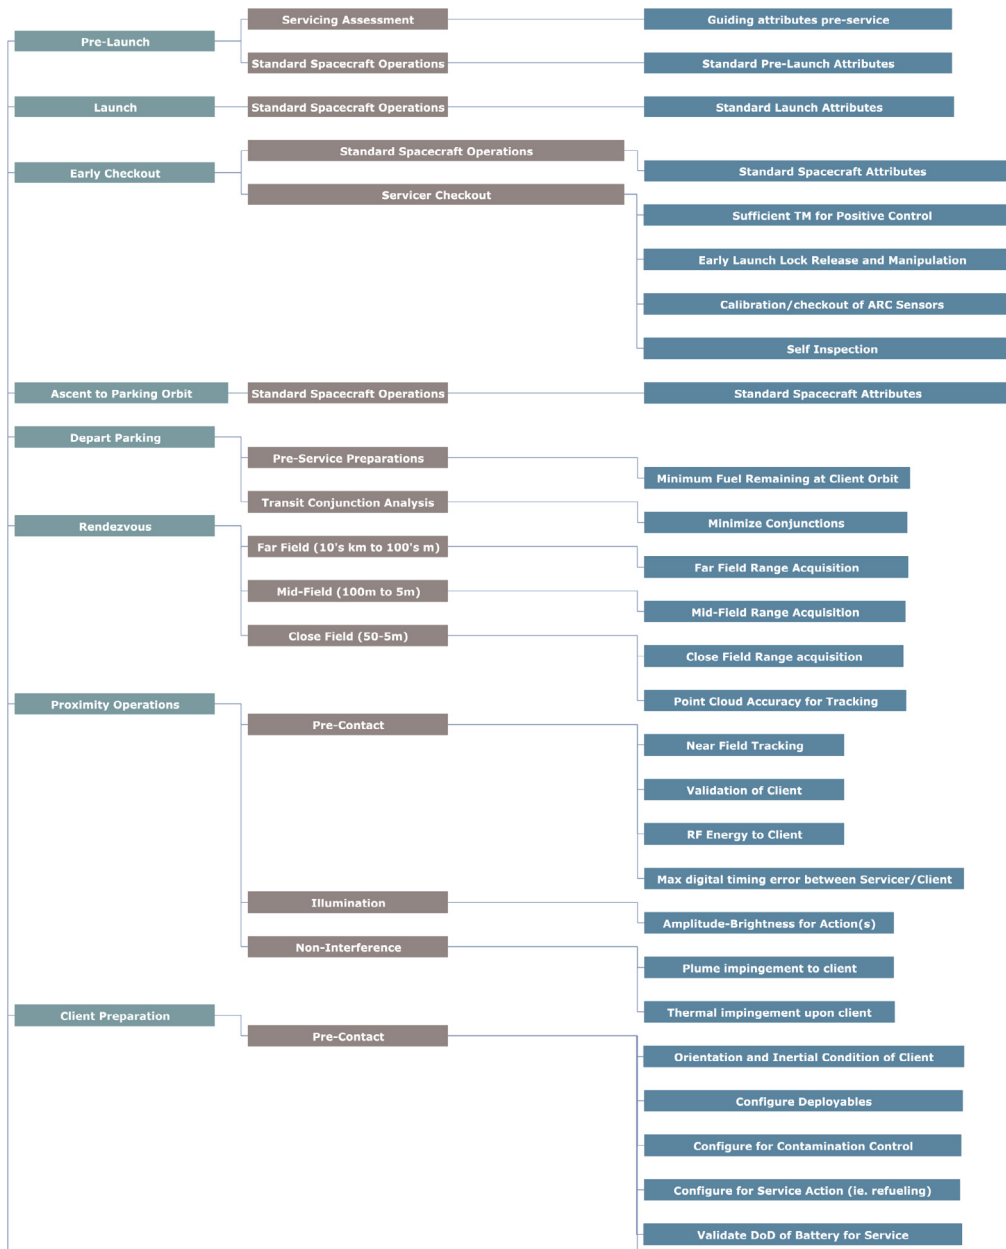

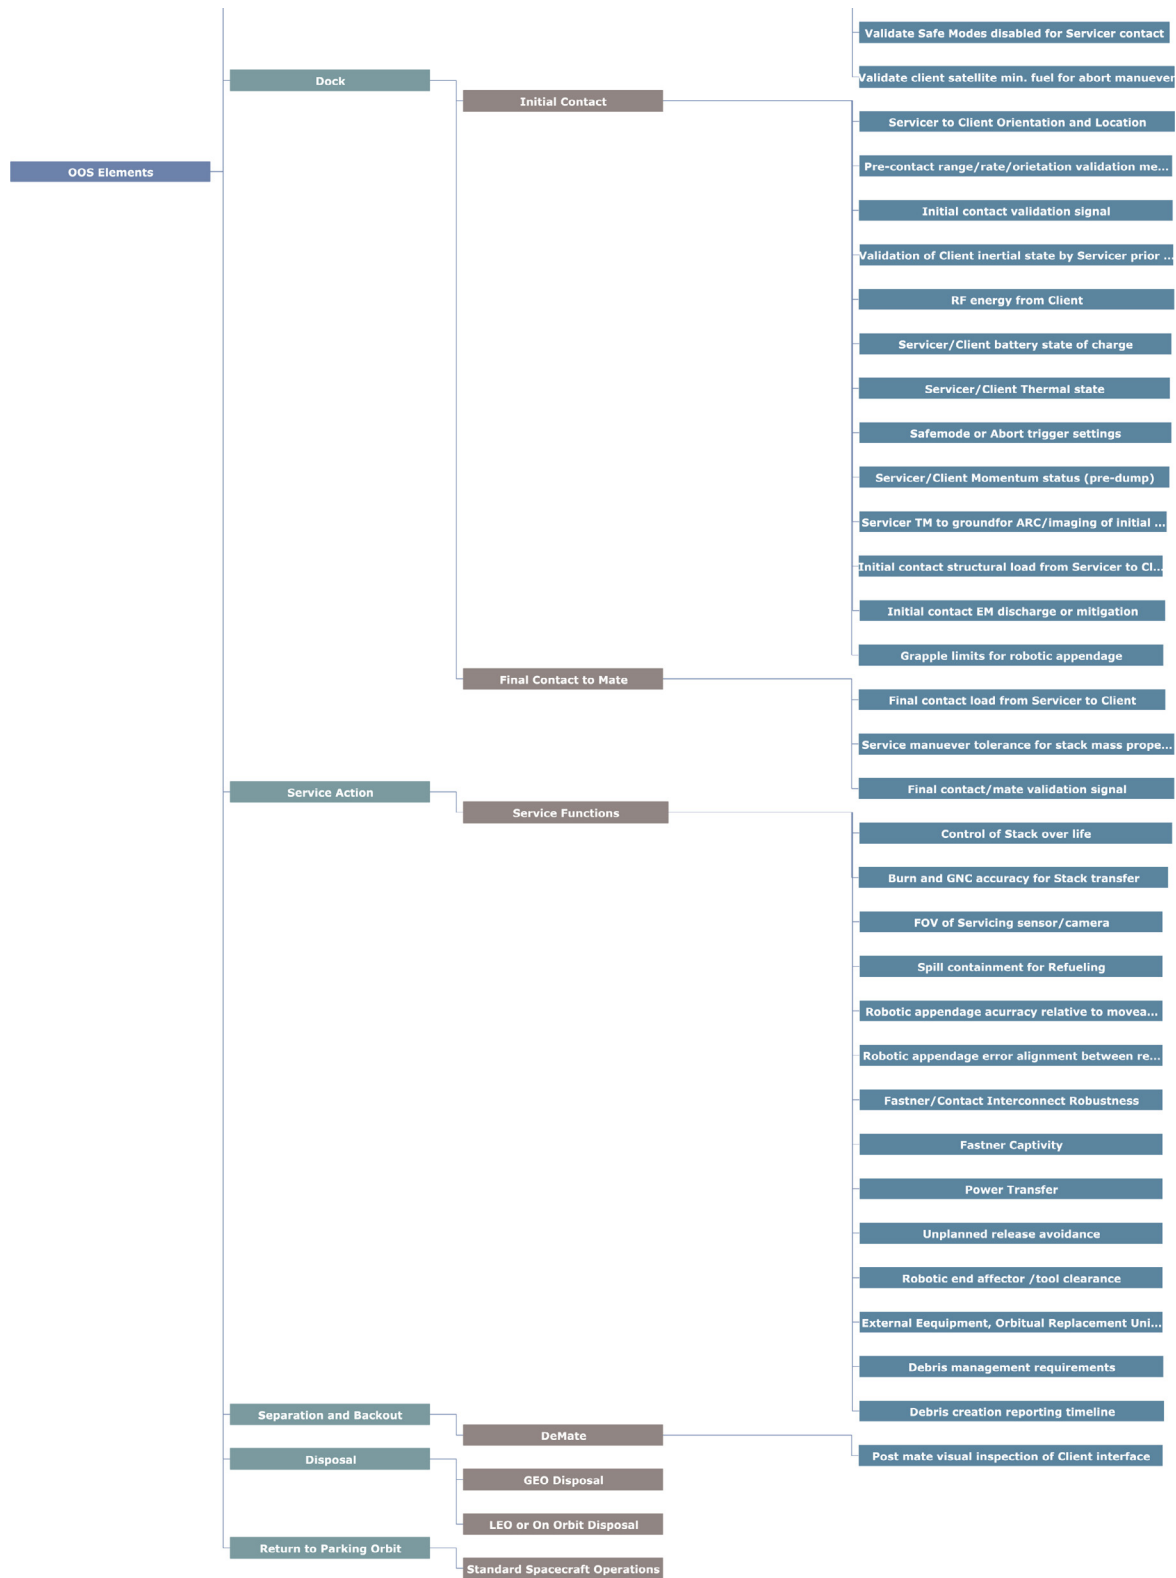

Appendix B. OOS Topology Worksheet

The following table expands upon the functions and attributes defined in [Appendix A](#), and lists the proposed quantitative values to define each attribute, as well as the corresponding existing standard (if any). Those that have an existing standard identified have been highlighted in green

Elements	OV-1 Mission Elements or Event Description	Functions associated with Element or Event	Attributes associated with Functions	Proposed Quantitative Value	Reference	References	
						Existing Space Standard	Other Domain Standard
A	Pre-Launch	a) Servicing Assessment (Client/Servicer) b) Standard spacecraft operations and guidelines	Standard Spacecraft Attributes	There are a number of capabilities that both Servicer and Client should have. Recommend a guideline document be developed that identifies a servicing "hard contact" assessment. While this is currently contractual, this lends itself to a standard guideline that all "servicing" players discuss ahead of time.	NASA Functional Decomposition Document, Appendix D (pg 121)	AIAA R-099-2001	
	B Launch	Standard Spacecraft Operations	Standard Spacecraft Attributes			ISO 14622:2000	
	C Early Orbit Checkout	Standard Spacecraft Operations	Standard Spacecraft Attributes			ISO 10784-1:2011	
		Servicer Functions Checkout	Sufficient TM for Positive (Robotic) Control	TBD bps from ground to Servicer (Recommend a rate that is 3x what a robotic appendage control system requires, with a bandwidth 2x required of the data at frequency.)			
			Early launch lock release and manipulation	Launch locks for deployable systems (Is there a standard for a launch hold down and release mechanism already or is something that is needed. Would also apply to parasitic tools or free flyers that are used as inspectors to aide the servicer. Whatever launch lock with release mechanism is considered a "safety" item that if fails will release mass.)			
			Calibration of ARC sensors	Values for alignment should be based on the source proposed, either onboard or moon/sun/earth/star etc. Background noise figures should be set as a standard for the calibration object if not onboard.			
			Self Inspection of critical hold down mechanisms prior to maneuvering burn that begins the Servicers "operation"	Minimum resolution of image should be defined by the smallest mechanical item on each clamp/hold down such that visual validation can be used to backup an indicator that the object is connected, under minimum lighting conditions (defined as lumens/m2) for artificial or sun.			
D	Ascent to Parking Orbit	Standard Spacecraft Operations	Standard Spacecraft Attributes				
E	Depart Parking Orbit	Pre-Service Preparations	Minimum Fuel Remaining at Client Orbit	>10% to return to parking orbit or get to the Servicer disposal orbit, whichever is greater. Goal is to always maintain enough fuel to move the Servicer to a safe/stable/EOL orbit, to avoid a "dead" satellite problem.		ISO 23339:2010	
		Transit Conjunction Analysis	Minimum conjunctions	Through either JSpOC or CSPOC (or other) prior to servicer transfer and maneuver a documented planned trajectory has been checked for possible conjunctions.			
F	Rendezvous	Pre-Contact-FarRange/Field (10's km to 100's m)	Far Range/Field Acquisition	Camera min. FOV, resolution for TBD distance acquisition, minimum tracking for bearing angles is 1 pixel accuracy on "center" of the target. Tracking rate is expected to be > 1Hz.	OG4 document		
				Min. two data points validation that acquisition of object is the Client (FOV and TLE)			
		Pre-Contact-Mid/Near Range/Field 100m to 5 m	Mid/Near Range/Field Acquisition	Line-of-sight (LOS) vector from Optical imaging should be +/- TBD degrees			
				Error budget for near field sensors to calculate attitude maneuvers onboard to maintain the imaging boresight within 5% of the attitude control onboard Servicer.			
		Pre-Contact-Mid/Near Range/Field 10-50meter client validation	10-50meter client detection based on given Client models	Tracking algorithm on sensors meet minimum of 90% successful detection at 15 degree rotation and 10cm scale.			[HINTERST2012] Hinterstoisser, Stefan, et al. "Model based training, detection and pose estimation of textureless 3d objects in heavily cluttered scenes." Asian conference on computer vision. Springer, Berlin, Heidelberg, 2012.
				Expected Accuracy for 3D point cloud model tracking comparisons: 10m Position RMS 0.01-0.05(m), Angle RMS(deg) 0.01-0.02; 25 m Position RMS(m) 0.1-0.5, Angle RMS(deg) 0.02-0.05; 50m Position RMS 3.5-6.0(m), Angles RMS(deg) 0.5-1.0	InFuse_SPACEAPPS_D5.6_V2.0		
		Pre-Contact-Close Range/Field 5 m to 1 m	Close Range/Field Acquisition	Relative Range and Rate sensors +/- 0.1% and 1%, respectively for meter accuracy and meters/second accuracy.	IDL Payload Element Study		
			Point Cloud Accuracy for tracking determination	For Point cloud tracking success attributes: Descriptor radius (DR) and cluster size(CS) should be resolvable (1-10% of size of object detected); DR and CS should be same order of magnitude; Model point density should be no more than one order of magnitude different from scene point density. All numbers based on client model resolved at full scale (on ground or in orbit).			

Elements	OV-1 Mission Elements or Event Description	Functions associated with Element or Event	Attributes associated with Functions	Proposed Quantitative Value	Reference	Existing Space Standard	Other Domain Standard
G	Prox Ops Inspection	Pre-Contact	Near Field tracking	should be within $\pm 0.1\%$ of range, $\pm 1\%$ of acceleration, and $\pm 5\deg$ of pitch/roll/yaw	SP A, B, D		
			Validation of Client	Confirmation of image taken of satellite should be validated with Client in proprietary setting. If object cannot be confirmed as Client, inspection abort should occur. Safeguard of images and videos must be maintained.			
			RF Energy to Client	Maintain electric field below 20V/m peak (below 50V/m for communication between 2-4GHz or 5.5-5.9GHz)		AIAA S-121A-201X Public Review Draft	AIAA S-121A-2017
		Illumination	Onboard Digital timing coordination between Servicer/Client's spacecraft	Any difference in the onboard clock timing between Servicer and Client should be no greater than 0.20 seconds relative to each other.		CCSDS 301.0-B-4	
			Amplitude-Brightness required	Amplitude-Brightness required for sufficient human validation of optical images should be at least 860Lum/m ²	Based on NASA EVA Headlamp for an astronaut within 1 meter of the object and ocular observation		DOT HS 811 439 #108, Part 564
			Plume impingement to Client	Use Metric#3 to keep potential plume impingement levels below critical level, defined by calculation to prevent rotation of client at speeds in excess of the servicer appendage escape speed	CONFERS Plume Impingement Metric (Metric #3)		
			Thermal impingement to Client	Shading of or imparting radiative energy or adding sun reflectance impingement to Client must be less than 25% of the Clients maximum thermal heat rejection or heater values, if the thermal impingement is beyond TBD hours. (Must compute given thermal profile of Client spacecraft and clearly identify the limits to Servicer.)			
H	Client Preparation	Pre-Contact	Orientation of Client and appropriate inertial condition	Client must demonstrate and maintain stability in pitch/yaw/roll to <1 deg/second. If consumable ADCS is used, sufficient margin exists that is >10% required during the entire time of the Servicing operation plus 4 days.	OG4_I3DS_D1.2-Use Case		
			Configure deployables (if possible)	Match ground based Client model given to Servicer for specific geometric profile prior to imaging or servicing. Deviations from ground based model should be identified to Servicer prior to Servicing operations. Client should take all measures to maximize or optimize detection features.	OG4_I3DS_D1.2-Use Case		
			Configure for contamination control (if possible)	TBD Values? Servicer shall perform all relative close approach, dock, contact, mate, de-mate and flyaway to minimize thruster plume contamination onto surfaces of the client.		ISO 15388:2012	
			Configure for refueling	Validation of onboard valve settings, propulsion commands disabled, etc. shall be done and communicated to Servicer as positive indication Client is in condition for refueling.			DOT HS 811 439 #106
			Validate battery DoD	DOD > TBD % (Minimum of 3x expected engagement of servicing operation)			
			Validate Client satellite disables safe modes that would counteract Servicer upon contact/dock/mate	Receive positive validation from Client ground support team.			
			Validate client satellite has min. prop fuel for abort	RCS fuel > TBD m/s (use RPO metric back out)		ISO 23339:2010	FAA 121.161
I	Dock	Initial Contact	Relative Servicer to Client orientation/location	RPO metrics defined by the sensors onboard Servicer. Min. of no more than 10% offset in any relative axis between servicer/client prior to start of final RPO maneuver to first contact.			DOT HS 811 439 #208, #214
			Pre-contact range/rate/orientation measurements	$\pm 10\text{cm}$ range, $\pm 5\text{cm}$ transverse, $\pm 0.5\text{deg}$ pitch/yaw, $\pm 1\text{deg}$ roll	SP A, B, D		
			Initial Contact validation signal	Validation signal from hardware contact required to continue, contact sensor accuracy <TBD mm or TBD deg. Ground indication should be both audible and light signature to provide operators dual notification, whether autonomous onboard or manual from ground.			FAA 121.289
			Validation of Client inertial state prior to dock maneuver	Client must demonstrate and maintain stability in pitch/yaw/roll to <1 deg/second prior to contact. Servicer validation using passive/active sensors prior to contact will validate if the client is maintaining stability.			
			RF Energy from Client	Maintain electric field below 20V/m peak (below 50V/m for comm between 2-4GHz or 5.5-5.9GHz)	AIAA S-121A-201X Public Review Draft	AIAA S-121A-2017	
			Servicer/Client battery state of charge	$\pm\%$ DOD (to account for any loss of SA power)			
			Servicer/Client thermal state	Shading of or imparting radiative energy or adding sun reflectance impingement to Client or from Client to Servicer must be less than 25% of the Client/Servicers maximum thermal heat rejection or heater values, if the thermal impingement is beyond TBD hours. (Possible to use an IR camera for non-contact measurement and validation of thermal states.)			
			Safemode or Abort trigger settings	Servicer and Client operations teams validate software modes are set for safe mode and/or abort prior to contact. (Note this is one of the items that should be in the Servicer/Client contract that each validates what each safe/abort mode does, given possible faults in the servicing operation. Given that Clients may not have taken into account various "servicing" functions, the only real way to validate this is to run simulations on ground prototype systems that have same flight software enabled, and validate expected response.)			

Elements	OV-1 Mission Elements or Event Description	Functions associated with Element or Event	Attributes associated with Functions	Proposed Quantitative Value	Reference	Existing Space Standard	Other Domain Standard
			Service/Client Momentum Status	No more than 50 % of total RWA saturation is built up on either Client or Servicer in a positive momentum control service, prior to contact. Validation that nominal planned RWA buildup on Servicer does not exceed TBD % prior to end of Servicing operation and de-mating from Client? (Is it safe or prudent to desaturate with client attached?)			
			Pre-Dock visual observation/inspection of contact point	Min. of TBD images at a resolution to account for smallest contact mechanism or structure planned by Servicer contact mechanism, for pre-contact validation of client contact point robustness.			
			Servicer transmission to ground for ARC/imaging	Downlink rate maintained at TBD bps, latency < TBDms, Dropouts less than TBD/min.			
			Initial contact structure/mechanical load from Servicer to Client	Load limits do not exceed yield strength of intended contact point (or see RPO metric). Max force and torque is TBD (case dependant).	CONFERS Impact Mitigation Metric (Metric #1)		DOT HS 811 439 #208, #214
			Initial contact Electromagnetic discharge mitigation	Servicer able to accept and mitigate up to 10,000 volt differential upon initial contact with any external appendage.	See NRL testing under Phoenix.		
			Grapple Limits for Robotic appendage Servicer to Client	Compliance control within TBD relative position and rate of the robotic appendage that avoids client yield, upon contact.		AIAA G-056-1992	
		Final Contact-to-Mate	Final contact load between Servicer/Client	Comprehensive force < TBD % of yield limit of grapple point.			
			Servicer maneuver to est. stack mass properties	Min. imparted torque, max imparted torque. Fidelity of measurement to +/- TBD N-m.			
			Final Contact/Mate validation signal	Validation signal required to continue, contact sensor accuracy TBD mm or TBD deg, two fault tolerant or two methods recommended.			
	Service: (Life Extension, Orbit reposition, refueling, self-refueling at depot, Manipulation, ORU add/replace, debris collection, disposal or debris or client)	Service Actions (formerly Docking Actions)	Servicer control and stability of stack over Servicing operation	TBD values.			FAA 121.163
			Burn and GNC Accuracy for transfer by Servicer	TBD values.			
			FOV of Service camera	Based on camera FOV and positions and service to be performed.	-SSP 30550 Vol 1 Rev c, page 9 - Feb 17, 1995 SPDM Model		
			Spill Containment for Refueling	Primary method to recover any release of transferring consumable that turns to gas should contain 99% of any release. (?) If a cover is a used, nominal contact between client fuel valve wall and cover should be positively maintained during refueling. Internal surface of cover that is used to maintain the coating resulting from outgassing should not touch optics or important objects on Client/Servicer.		ISO 23339:2010	
			Robotic Appendage Accuracy relative to Moveable or non moveable interface for grapple	+/- 5mm in any direction, and +/- 1 degree in any axis	D2.14 OG5		
			Robotic Appendage error alignment between relative pose and orientation of serviced contact/grapple/connection point	TBD in all axes, or 5% difference in measured pose to actual position in X,Y,Z from "lip" and omega in rotation.			
			Fastener Contact/Interconnect	Fastener max. torque as measured by robotic end effector of no more than 5.3N-m (3.9ft-lbf), and/or number of turns of fastener based on ground calibration (fastener specific)		AIAA G-072-1995	
			Fastener Captivity	Fastener captivity cavity (TBD cubic cm) or 2 times size of largest fastener times number of fasteners proposed to be captive at any one service event.			
			Power Transfer from one object to another after connection	+/- TBD % ripple current on voltage supply side		AIAA G-072-1995	
			Un-planned release of object through robotic appendage manipulation	Robotic appendage operation shall have two methods for connection at all times during object maneuvering. One active through the robotic appendage mechanical connection to the object, and one passive (through another means).			
			Robotic End Effector/Tool Clearance	Access envelopes as defined	- SSP 42004 Section C, Para C3.2.2.1; - Section D Para D3.2.2.1; - Section E para E3.2.1.1; - Section G para G3.2.2.1; - Section H para H3.2.2.1; - Section K para K3.2.2.1	AIAA G-056-1992	
			External Requirement, Orbital Replacement Unit, Maintenance Unit replacement	- All external items can be transported while exposed to on orbit space environment for up to 8 hours without active thermal interface to robotic system. - Color of Independent replacement or moveable object should be either white or black to support differentiation using a B/W optical system. - Keying to avoid inadvertent mis connection shall conform to TBD standard...	-SSP 30550 Vol 1 Rev c, page 7, 3.2.1.9, 3.2.1.13 - SSP 50005 Para 9.5.3.2.i.8.a		

Elements	OV-1 Mission Elements or Event Description	Functions associated with Element or Event	Attributes associated with Functions	Proposed Quantitative Value	Reference	Existing Space Standard	Other Domain Standard
			Debris Collection	- Net or receptacle size for capture is equal or greater than 3x the total volume anticipate for an excepted debris mission. - Net or receptacle wall size is 2x smaller than the expected maximum size of the debris to collect	Is there any data from Clean Debris		
			Disposal in GEO	Follow International guidelines on graveyard orbit altitude; - Safe mode all consumable attitude control systems, drain all batteries to maximum DoD		ISO 26872:2010	
			Debris Creation Reporting Timeline	Within TBD hours of un-intended debris creation, with time/content and approximate velocity			
K	Separation and Backout	DeMate	Client Servicer Inertial control Post mate visual inspection of interface	Pre-release client validates safe mode/inertial hold modes off. Maximum separation torques imparted by Servicer NTE +/- TBD % of detumble rate of Client. Separation velocity minimum TBD m/s, or equivalent to the Metric 3 velocity to avoid any Servicer/Client appendage. TBD resolution based on smallest object affected (i.e. fuel valve e.g.)			
L	Disposal of Used parts and/or servicer	Spacecraft disposal to avoid any debris in operational orbits	See specifics in NASA NPR 8715.6	See specifics in NASA NPR 8715.6	NASA NPR 8715.6	ISO 26872:2010	
M	Return to Parking Orbit	Standard Spacecraft Operations	Standard Spacecraft Attributes				
N	Client Operations Continues/Changes	Standard Spacecraft Operations	Standard Spacecraft Attributes				

Appendix C. Interface Survey Results

The following table shows the results of a survey on docking interfaces with information published or publicly available on a website. The approximately 25 interfaces found in the survey covered a wide range of sizes, from CubeSat-class docking interfaces on the lower end to space station human rated interfaces on the upper end, and everything in-between. However, this list is not comprehensive, and contains only interfaces with information readily available and searchable on the web; there are likely more interfaces which are proprietary.

Name	Developer	Existing?	Flight Tested?	ICD Available?	Gendered?	Human Rated?	Propellant	Power	Data	Docking	Grapple	Transfer Diameter (m)	Comments
Rapidly Attachable Fluid Transfer Interface (RAFTI)	Orbit Fab	Y	N	Y	Y	N	Y	N	Y	Y	N	N/A	Fits on microsats
Androgynous Peripheral Attach System (APAS)-95	Roscosmos / NASA	Y	Y		N	Y	N	Y* [1]	Y*	Y	N	0.8	Essentially same as APAS-89
Common Berthing Mechanism (CBM)	NASA / ESA / Roscosmos / JAXA	Y	Y	Y	N	Y	Y	Y	Y	Y	N	0.8	
CLING	USC SERC	Y	N	N	N	N				Y	N	0.1	Genderless docking system with embedded RPOS
Satellite Grasper Tool (SGT)	Honeybee Robotics	Y			Y							0.1	
Universal Gripper Anchor (UGA)	Honeybee Robotics	Y			N						Y	UNK	
International Berthing and Docking Mechanism (IBDM)	ESA	Y	Y	Y [2]	N	Y	N	Y	Y	Y	N	0.8	IDSS Compatible (International Docking System Standard)
Standard Interface for Robotic Manipulation of Payloads in Future Space Missions (SIROM)	EU/University of StrathClyde	Y	N										Part of Horizon 2020 Standard Technologies
NASA Docking System (NDS)	NASA	Y	Y	Y [3]	N	Y	Y* [4]	Y	Y	Y	N	0.813	IDSS Compatible, uses magnets to assist rotational alignment
Gecko Gripper	Altius Space Machines / JPL	Y	N		N/A	N	N	N	N	Y	Y	N/A	Does not require a connector on the other end, only a durable surface to grasp
MagTag Satellite Servicing Interface	Altius Space Machines	Y			Y								
Magnetic Extendable Capture System	AstroScale												
Astrobee Free Flyer Berth	NASA Ames	Y	Y	Y	Y	Y				Y		~0.1	
Latching End Effector (LEE)	MDA	Y	Y		Y		N	N	Y	Y	Y	N/A	Found on the end of Canadarm2 (SSRMS). Also used by Japanese arm (JEMRMS)
Power and Data Grapple Fixture (PDGF)	Spar Aerospace (Now MDA)	Y	Y		Y	N	N	Y	Y	Y	Y	N/A	Interfaces with Canadarm2. Replaceable on orbit
Flight Releasable Grapple Fixture (FRGF)	Spar Aerospace (Now MDA)	Y	Y		Y	N	N	N	N	N	Y	N/A	Interfaces with Canadarm2
Latchable Grapple Fixture (LGF)	Spar Aerospace (Now MDA)	Y	Y		Y	N	N	N	N	Y	Y	N/A	Interfaces with Canadarm2
Power and Video Grapple Fixture (PVGF)	Spar Aerospace (Now MDA)	Y	Y		Y	N	N	Y	Y	Y	Y	N/A	Interfaces with Canadarm2
Electrical Flight Grapple Fixture (EFGF)	Spar Aerospace (Now MDA)	Y	Y		Y	N	N	Y	Y	N	Y	N/A	Interfaces with Canadarm1
Probe Fixture Assembly (PFA)	MDA	Y	Y		Y	N	N			Y	Y	~0.1	Flew on Orbital Express?
User Defined Adapter (UDA)	NovaWurks	Y	Y	Y	Y	Y	Y	Y					
Tyvak Cubesat Docking Mechanism	Tyvak	Y											For Cubesats
SPHERES Universal Docking Port (UDP)	MIT	Y	Y		N		N	N	N	Y		N/A	
Intelligent Space System Interface (ISSI)	iBOSS	Y	Y	Y	N	N	N	Y	Y	Y	Y	N/A	can also transfer heat load. Data is transferred optically

Yellow box indicates information not publicly available

References

- [1] D. Barnhart, B. Sullivan, Economics of repurposing in situ retired spacecraft components, in: AIAA SPACE 2012 conference & exposition, p. 5304.
- [2] J. Shoemaker, M. Wright, Orbital Express space operations architecture program, in: Spacecraft Platforms and Infrastructure, volume 5419, International Society for Optics and Photonics, pp. 57–66.
- [3] D. Barnhart, P. Will, B. Sullivan, R. Hunter, L. Hill, Creating a Sustainable Assembly Architecture for Next-Gen Space: The Phoenix Effect, in: 30th Space Symposium, a.
- [4] D. Barnhart, B. Sullivan, R. Hunter, J. Bruhn, E. Fowler, L.M. Hoag, S. Chappie, G. Henshaw, B.E. Kelm, T. Kennedy, Phoenix program status-2013, in: AIAA Space 2013 Conference and Exposition, b, p. 5341.
- [5] Dan Oltrogge, International Organization Standardization (ISO) activities for Long-Term Sustainability (LTS) of space activities, (Embry-Riddle Aeronautical University Scholarly Commons, Space Traffic Management Conference).
- [6] B. Weeden, CONFERS One Pager, 2018. Available at <https://www.satelliteconfers.org/wp-content/uploads/2018/07/OnePager-062018.pdf>.
- [7] CONFERS, Recommended Design and Operational Practices, 2019. Available at https://www.satelliteconfers.org/wp-content/uploads/2019/10/CONFERS_Operating_Practices.pdf.
- [8] D.A. Barnhart, R. Rughani, J.J. Allam, B. Weeden, F.A. Slane, I. Christensen, Using Historical Practices to Develop Safety Standards for Cooperative On-Orbit Rendezvous and Proximity Operations, 69th International Astronautical Congress (IAC), Bremen, Germany, 1-5 October 2018.
- [9] D.A. Barnhart, R. Rughani, J.J. Allam, Initial Safety Posture Investigations for Earth Regime Rendezvous and Proximity Operations, in: 10th International Association for the Advancement of Space Safety (IAASS) Conference, El Segundo, California, USA, 15-17 May 2019.
- [10] United Nations Office for Outer Space Affairs, Space Debris Mitigation Guidelines of the Committee on the Peaceful Uses of Outer Space, 2010, http://www.unoosa.org/pdf/publications/st_space_49E.pdf.
- [11] United Nations Office for Outer Space Affairs, Convention on International Liability for Damage Caused by Space Objects, 1971, https://www.unoosa.org/pdf/gares/ARES_26_2777E.pdf.
- [12] S. Croomes, Overview of the DART mishap investigation results, NASA Report (2006) 1–10.
- [13] S.R. Ellis, Collision in space, *Ergonomics in Design* 8 (1) (2000) 4–9.
- [14] From Initial Results from Space Infrastructure Foundation in Conversations with Mr. Fred Slane and Mike Kearney, January, 2019.
- [15] ISO 11227:2012, Space systems – Test procedure to evaluate spacecraft material ejecta upon hypervelocity impact, Standard, International Organization for Standardization, Geneva, CH, 2012.
- [16] ISO 12208:2015, Space systems – Space environment (natural and artificial) - Observed proton fluences over long duration at GEO and guidelines for selection of confidence level in statistical model of solar proton fluences, Standard, International Organization for Standardization, Geneva, CH, 2015.
- [17] ISO 14302:2002, Space systems – Electromagnetic compatibility requirements, Standard, International Organization for Standardization, Geneva, CH, 2002.
- [18] ISO 24637:2009, Space systems – Electromagnetic interference (EMI) test reporting requirements, Standard, International Organization for Standardization, Geneva, CH, 2009.
- [19] ISO 14303:2002, Space systems – Launch-vehicle-to-spacecraft interfaces, Standard, International Organization for Standardization, Geneva, CH, 2002.
- [20] ISO 14622:2000, Space systems – Loads and induced environment, Standard, International Organization for Standardization, Geneva, CH, 2000.
- [21] ISO 14953:2000, Space systems – Structural design – Determination of loading levels for static qualification testing of launch vehicles, Standard, International Organization for Standardization, Geneva, CH, 2000.
- [22] ISO 14954:2005, Space systems – Dynamic and static analysis – Exchange of mathematical models, Standard, International Organization for Standardization, Geneva, CH, 2005.
- [23] ISO 14623:2003, Space systems – Pressure vessels and pressurized structures - Design and operation, Standard, International Organization for Standardization, Geneva, CH, 2003.
- [24] ISO 24638:2008, Space systems – Pressure components and pressure system integration, Standard, International Organization for Standardization, Geneva, CH, 2008.
- [25] ISO 14624-1:2003, Space systems – Safety and compatibility of materials – Part 1: Determination of upward flammability of materials, Standard, International Organization for Standardization, Geneva, CH, 2003.
- [26] ISO 14624-2:2003, Space systems – Safety and compatibility of materials – Part 2: Determination of flammability of electrical-wire insulation and accessory materials, Standard, International Organization for Standardization, Geneva, CH, 2003.
- [27] ISO 14624-3:2005, Space systems – Safety and compatibility of materials – Part 3: Determination of offgassed products from materials and assembled articles, Standard, International Organization for Standardization, Geneva, CH, 2005.
- [28] ISO 14624-4:2003, Space systems – Safety and compatibility of materials – Part 4: Determination of upward flammability of materials in pressurized gaseous oxygen or oxygen-enriched environments, Standard, International Organization for Standardization, Geneva, CH, 2003.
- [29] ISO 14624-5:2006, Space systems – Safety and compatibility of materials – Part 5: Determination of reactivity of system/component materials with aerospace propellants, Standard, International Organization for Standardization, Geneva, CH, 2006.
- [30] ISO 14624-6:2006, Space systems – Safety and compatibility of materials – Part 6: Determination of reactivity of processing materials with aerospace fluids, Standard, International Organization for Standardization, Geneva, CH, 2006.
- [31] ISO 14624-7:2006, Space systems – Safety and compatibility of materials – Part 7: Determination of permeability and penetration of materials to aerospace fluids, Standard, International Organization for Standardization, Geneva, CH, 2006.
- [32] ISO 14952-1:2003, Space systems – Surface cleanliness of fluid systems – Part 1: Vocabulary, Standard, International Organization for Standardization, Geneva, CH, 2003.
- [33] ISO 14952-2:2003, Space systems – Surface cleanliness of fluid systems – Part 2: Cleanliness levels, Standard, International Organization for Standardization, Geneva, CH, 2003.
- [34] ISO 14952-3:2003, Space systems – Surface cleanliness of fluid systems – Part 3: Analytical procedures for the determination of nonvolatile residues and particulate contamination, Standard, International Organization for Standardization, Geneva, CH, 2003.
- [35] ISO 14952-4:2003, Space systems – Surface cleanliness of fluid systems – Part 4: Rough-cleaning processes, Standard, International Organization for Standardization, Geneva, CH, 2003.
- [36] ISO 14952-5:2003, Space systems – Surface cleanliness of fluid systems – Part 5: Drying processes, Standard, International Organization for Standardization, Geneva, CH, 2003.
- [37] ISO 14952-6:2003, Space systems – Surface cleanliness of fluid systems – Part 6: Precision-cleaning processes, Standard, International Organization for Standardization, Geneva, CH, 2003.
- [38] ISO 15388:2012, Space systems – Contamination and cleanliness control, Standard, International Organization for Standardization, Geneva, CH, 2012.
- [39] ISO 16454:2007, Space systems – Structural design – Stress analysis requirements, Standard, International Organization for Standardization, Geneva, CH, 2007.
- [40] ISO 16781:2013, Space systems – Simulation requirements for control system, Standard, International Organization for Standardization, Geneva, CH, 2013.
- [41] ISO/TR 11233:2014, Space systems – Orbit determination and estimation – Process for describing techniques, Standard, International Organization for Standardization, Geneva, CH, 2014.
- [42] ISO 26900:2012, Space data and information transfer systems – Orbit data messages, Standard, International Organization for Standardization, Geneva, CH, 2012.
- [43] ISO 14711:2003, Space systems – Unmanned mission operations concepts – Guidelines for defining and assessing concept products, Standard, International Organization for Standardization, Geneva, CH, 2003.
- [44] ISO 14950:2004, Space systems – Unmanned spacecraft operability, Standard, International Organization for Standardization, Geneva, CH, 2004.
- [45] ISO 23041:2018, Space systems – Unmanned spacecraft operational procedures – Documentation, Standard, International Organization for Standardization, Geneva, CH, 2018.
- [46] ISO/TR 18146:2015, Space systems – Space debris mitigation design and operation guidelines for spacecraft, Standard, International Organization for Standardization, Geneva, CH, 2015.
- [47] ISO/TR 20590:2017, Space systems – Debris mitigation design and operation manual for launch vehicle orbital stages, Standard, International Organization for Standardization, Geneva, CH, 2017.
- [48] ISO 20893, ISO/CD 20893 (Under Development). Space systems – DETAILED SPACE DEBRIS MITIGATION REQUIREMENTS FOR LAUNCH VEHICLE ORBITAL STAGES, Standard, International Organization for Standardization, Geneva, CH.
- [49] ISO 24113:2019, Space systems – Space debris mitigation requirements, Standard, International Organization for Standardization, Geneva, CH, 2019.
- [50] ISO 15864:2004, Space systems – General test methods for space craft, subsystems and units, Standard, International Organization for Standardization, Geneva, CH, 2004.
- [51] ISO 15859-1:2004, Space systems – Fluid characteristics, sampling and test methods – Part 1: Oxygen, Standard, International Organization for Standardization, Geneva, CH, 2004.
- [52] ISO 15859-2:2004, Space systems – Fluid characteristics, sampling and test methods – Part 2: Hydrogen, Standard, International Organization for Standardization, Geneva, CH, 2004.
- [53] ISO 15859-3:2004, Space systems – Fluid characteristics, sampling and test methods – Part 3: Nitrogen, Standard, International Organization for Standardization, Geneva, CH, 2004.
- [54] ISO 15859-4:2004, Space systems – Fluid characteristics, sampling and test methods – Part 4: Helium, Standard, International Organization for Standardization, Geneva, CH, 2004.
- [55] ISO 15859-5:2004, Space systems – Fluid characteristics, sampling and test methods – Part 5: Nitrogen tetroxide, Standard, International Organization for Standardization, Geneva, CH, 2004.
- [56] ISO 15859-6:2004, Space systems – Fluid characteristics, sampling and test methods – Part 6: Monomethylhydrazine propellant, Standard, International Organization for Standardization, Geneva, CH, 2004.
- [57] ISO 15859-7:2004, Space systems – Fluid characteristics, sampling and test methods – Part 7: Hydrazine propellant, Standard, International Organization for Standardization, Geneva, CH, 2004.
- [58] ISO 15859-8:2004, Space systems – Fluid characteristics, sampling and test methods – Part 8: Kerosine propellant, Standard, International Organization for Standardization, Geneva, CH, 2004.
- [59] ISO 15859-9:2004, Space systems – Fluid characteristics, sampling and test methods – Part 9: Argon, Standard, International Organization for Standardization, Geneva, CH, 2004.

- [60] ISO 15859-10:2004, Space systems – Fluid characteristics, sampling and test methods – Part 10: Water, Standard, International Organization for Standardization, Geneva, CH, 2004.
- [61] ISO 15859-11:2004, Space systems – Fluid characteristics, sampling and test methods – Part 11: Ammonia, Standard, International Organization for Standardization, Geneva, CH, 2004.
- [62] ISO 15859-12:2004, Space systems – Fluid characteristics, sampling and test methods – Part 12: Carbon dioxide, Standard, International Organization for Standardization, Geneva, CH, 2004.
- [63] ISO 15859-13:2004, Space systems – Fluid characteristics, sampling and test methods – Part 13: Breathing air, Standard, International Organization for Standardization, Geneva, CH, 2004.
- [64] ISO 14620-2:2011, Space systems – Safety requirements – Part 2: Launch site operations, Standard, International Organization for Standardization, Geneva, CH, 2011.
- [65] ISO 14620-3:2005, Space systems – Safety requirements – Part 3: Flight safety systems, Standard, International Organization for Standardization, Geneva, CH, 2005.
- [66] ISO 10784-1:2011, Space systems – Early operations – Part 1: Spacecraft initialization and commissioning, Standard, International Organization for Standardization, Geneva, CH, 2011.
- [67] ISO 16127:2014, Space systems – Prevention of break-up of unmanned spacecraft, Standard, International Organization for Standardization, Geneva, CH, 2014.
- [68] ISO 21347:2005, Space Systems – Fracture and damage control, Standard, International Organization for Standardization, Geneva, CH, 2005.
- [69] ISO/TR 16158:2013, Space Systems – Avoiding collisions with orbiting objects, Standard, International Organization for Standardization, Geneva, CH, 2013.
- [70] ISO 23339:2010, Space Systems – Unmanned spacecraft – Estimating the mass of remaining usable propellant, Standard, International Organization for Standardization, Geneva, CH, 2010.
- [71] ISO 26872:2019, Space Systems – Disposal of satellites operating at geosynchronous altitude, Standard, International Organization for Standardization, Geneva, CH, 2019.
- [72] CCSDS 320.0-M-7, RECOMMENDED PRACTICE FOR SPACECRAFT IDENTIFICATION FIELD CODE ASSIGNMENT CONTROL PROCEDURES, Standard, The Consultative Committee for Space Data Systems, Washington, D.C., 2017.
- [73] CCSDS 850.0-G-2, REPORT CONCERNING SPACECRAFT ONBOARD INTERFACE SERVICES, Standard, The Consultative Committee for Space Data Systems, Washington, D.C., 2013.
- [74] CCSDS 502.0-B-2, RECOMMENDED STANDARD FOR ORBIT DATA MESSAGES, Standard, The Consultative Committee for Space Data Systems, Washington, D.C., 2009.
- [75] CCSDS 503.0-B-1, RECOMMENDED STANDARD FOR TRACKING DATA MESSAGE, Standard, The Consultative Committee for Space Data Systems, Washington, D.C., 2007.
- [76] CCSDS 504.0-B-1, RECOMMENDED STANDARD FOR ATTITUDE DATA MESSAGES, Standard, The Consultative Committee for Space Data Systems, Washington, D.C., 2008.
- [77] CCSDS 508.0-B-1, RECOMMENDED STANDARD FOR CONJUNCTION DATA MESSAGES, Standard, The Consultative Committee for Space Data Systems, Washington, D.C., 2013.
- [78] CCSDS 540.0-G-1, REPORT CONCERNING TELEROBOTIC OPERATIONS, Standard, The Consultative Committee for Space Data Systems, Washington, D.C., 2016.
- [79] AIAA S-121A-2017, Electromagnetic Compatibility Requirements for Space Equipment and Systems, Standard, American Institute of Aeronautics and Astronautics, Reston, VA, 2017.
- [80] ANSI/AIAA S-081B-2018, Space Systems— Composite Overwrapped Pressure Vessels, Standard, American National Standards Institute and American Institute of Aeronautics and Astronautics, Reston, VA, 2018.
- [81] ANSI/AIAA S-080A-2018, Space Systems— Metallic Pressure Vessels, Pressurized Structures, and Pressure Components, Standard, American National Standards Institute and American Institute of Aeronautics and Astronautics, Reston, VA, 2018.
- [82] AIAA G-072-1995, Guide for Utility Connector Interfaces for Serviceable Spacecraft, Standard, American Institute of Aeronautics and Astronautics, Reston, VA, 1995.
- [83] AIAA G-056-1992, Guide to the Serviceable Spacecraft Grasping/Berthing/Docking Interfaces, Standard, American Institute of Aeronautics and Astronautics, Washington, D.C., 1992.
- [84] AIAA S-066-1995, Standard Vocabulary for Space Automation and Robotics, Standard, American Institute of Aeronautics and Astronautics, Washington, D.C., 1995.
- [85] AIAA R-099-2001, Recommended Practice : Space Launch Integration, Standard, American Institute of Aeronautics and Astronautics, Reston, VA, 2001.
- [86] N.H.T.S.A. (NHTSA), 49 CFR Part 571, Docket No. NHTSA-2010-0162, Federal Register 79 (66) (2014).
- [87] FMCSR Subpart F §393.70, FMCSR, Subpart F, §393.70. Parts and Accessories Necessary for Safe Operation – Coupling devices and towing methods, except for driveway-towaway operations, Standard, Federal Motor Carrier Safety Administration, Washington, D.C., 1072.
- [88] F.M.C.S.A. U.S. Department of Transportation, Interpretations of FMCSR Part 3939, <https://www.fmcsa.dot.gov/regulations/title49/section/393.70>. [Online; accessed 23-August-2019].
- [89] CONFERS, On-Orbit Servicing (OOS) Mission Phases, 2019. Available at https://www.satelliteconfers.org/wp-content/uploads/2019/10/OOS_Mission_Phases.pdf.
- [90] N.G.S.F. Center, On-Orbit Satellite Servicing Study, NASA Project Report (2010) 48–77.
- [91] A. Scannapieco, L. Feetham, M. Camarena, N. Aouf, Space-oriented navigation solutions with integrated sensor-suite: the I3DS H2020 project (2018).
- [92] M.S. Rea, et al., The IESNA lighting handbook: reference & application (2000).
- [93] H. Sundstrand, NASA Extravehicular Mobility Unit (EMU) LSS/SSA Data Book, 2002.
- [94] DOT HS 811 439, Quick Reference Guide (2010 Version) to Federal Motor Vehicle Safety Standards and Regulations, Standard, Department of Transportation – National Highway Traffic Safety Administration, Washington, D.C., 2011.
- [95] V. Dubanchet, P. Pellegrino, A. Biggio, Integrated 3D Sensor Suite – Space Robotics Technologies – "Inspection Sensor Suite", 2016.
- [96] J. Cook, V. Aksamentov, T. Hoffman, W. Bruner, ISS interface mechanisms and their heritage, in: AIAA SPACE 2011 conference & exposition, 2011, p. 7150.
- [97] O. Fab, Rapidly Attachable Fluid Transfer Interface (RAFTI), 2019, <https://static1.squarespace.com/static/5b7da3f1b40b9dda4d808180/t/5cc24b76ee6eb01b19cf4465/1556237175718/RAFTI+Brochure.pdf>. [Online; accessed 30-August-2019].
- [98] B. Khoshnevis, "Compliant, Low profile, Independently releasing, Non-protruding and Genderless docking system for robotic modules" (CLING), U.S. Patent 7 850 388, Dec.2010.
- [99] M. Jankovic, W. Brinkmann, S. Bartsch, R. Palazzetti, X. Yan, Concepts of active payload modules and end-effectors suitable for standard interface for Robotic Manipulation of Payloads in Future Space Missions (SIROM) interface, in: 2018 IEEE Aerospace Conference, IEEE, 2018, pp. 1–15.
- [100] F. Feng, L. Tang, J. Xu, H. Liu, Y. Liu, A review of the end-effector of large space manipulator with capabilities of misalignment tolerance and soft capture, Science China Technological Sciences 59 (11) (2016) 1621–1638.
- [101] M. Kortman, S. Ruhl, J. Weise, J. Kreisel, T. Schervan, H. Schmidt, A. Dafnis, Building block based iBoss approach: fully modular systems with standard interface to enhance future satellites, 66th International Astronautical Congress (Jerusalem, Israel, 2015).
- [102] T. Jaeger, "Spacecraft docking connector", U.S. Patent 9,231,323, Jan.2016,
- [103] D. Ruffatto, D. Beganovic, A. Parness, M. Spenko, Experimental Results of a Controllable Electrostatic/Gecko-like Adhesive on Space Materials, in: 2014 IEEE Aerospace Conference, IEEE, 2014, pp. 1–7.
- [104] Stanford, Stanford engineers design a robotic gripper for cleaning up space debris, 2017, <https://news.stanford.edu/2017/06/28/engineers-design-robotic-gripper-cleaning-space-debris/>. [Online; accessed 30-September-2019].
- [105] J.L. Forshaw, G.S. Aglietti, N. Navarathinam, H. Kadhem, T. Salmon, A. Pisseloup, E. Joffre, T. Chabot, I. Retat, R. Axthelm, et al., RemoveDEBRIS: An in-orbit active debris removal demonstration mission, Acta Astronautica 127 (2016) 448–463.
- [106] E.S. Research, T.C.E. ESTEC, Technical Note: Safe Close Proximity Operations, ESA Technical Note: ESA-TECSYE-TN-010228 (UNCLASSIFIED – DRAFT) (2018).
- [107] H. Onodera, A Study on Safety Requirements for On-Orbit Servicing Missions, in: 10th International Association for the Advancement of Space Safety (IAASS) Conference, El Segundo, California, USA, 15-17 May 2019, 2019.
- [108] J.A.E.A. (JAXA), 軌道上サービスミッションに係る安全基準[Safety Criteria Pertaining to On-Orbit Servicing Missions], JAXA System Design Standard (JERG-2-026) (2019).
- [109] ISO WD 24330, ISO WD 24330 (Working Draft). Space systems – Rendezvous and Proximity Operations (RPO) and On Orbit Servicing (OOS) – Programmatic principles and practices, Standard, International Organization for Standardization, Geneva, CH