Part II: ns Internals

Outline

- Fundamental concept
  - Split object: C++/OTcl linkage
- Plumbing
  - Wired
  - Wireless
- Scaling

OTcl and C++: The Duality

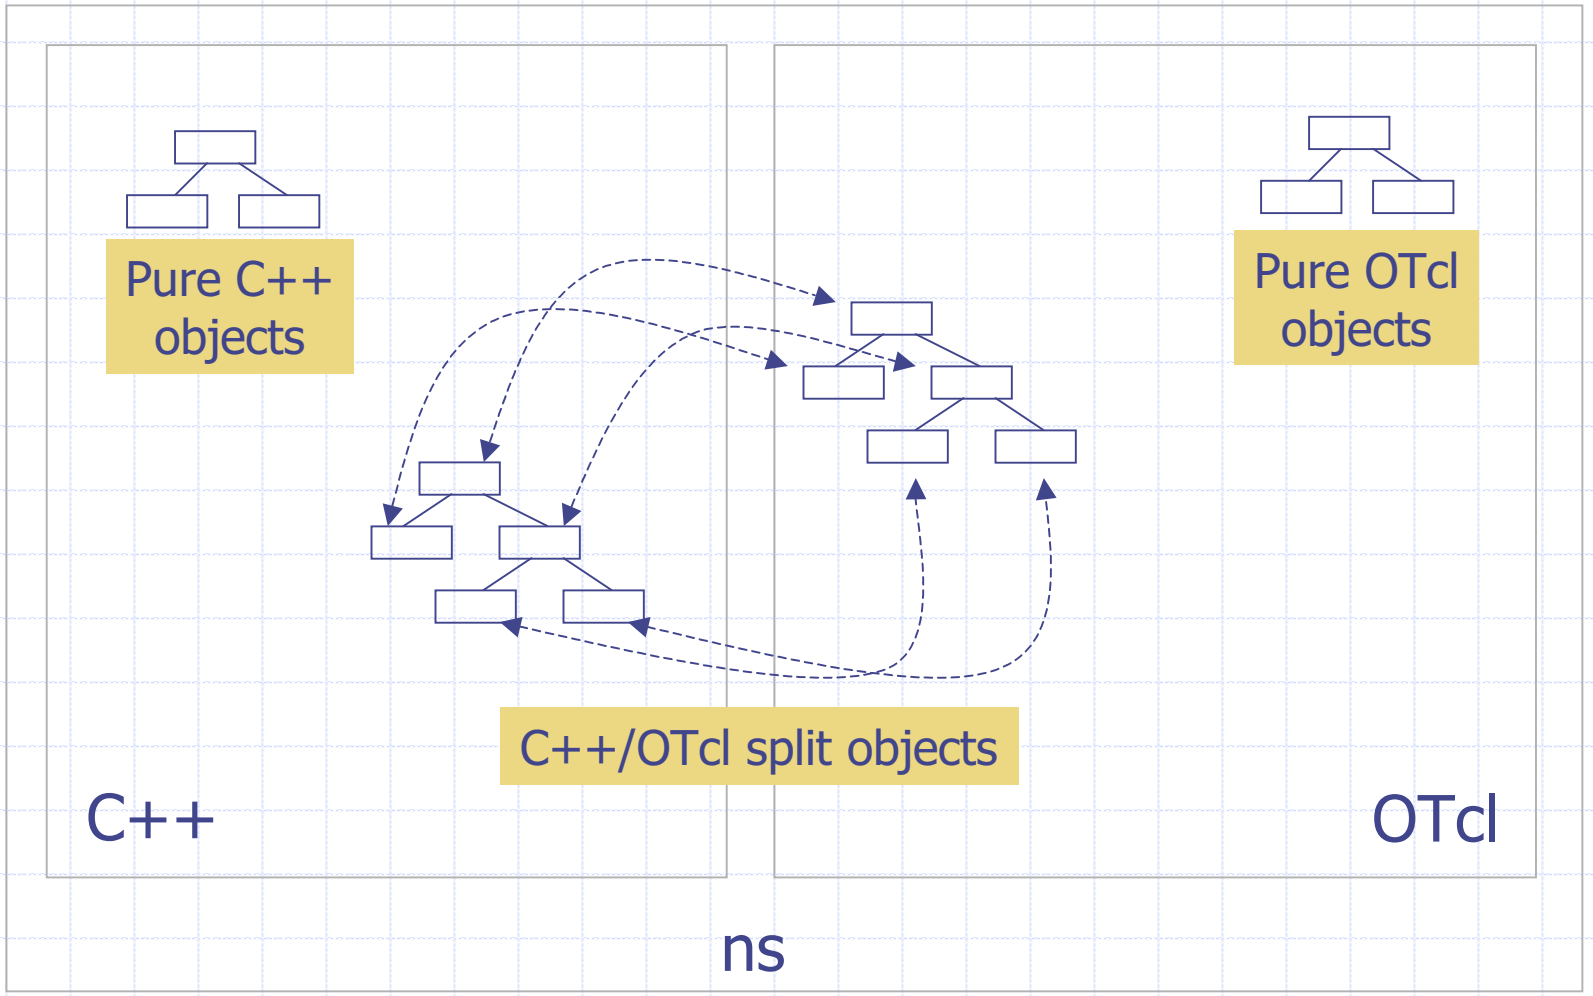

C++/OTcl Linkage

TclObject	Root of ns-2 object hierarchy
	bind(): link variable values between C++ and OTcl
	command(): link OTcl methods to C++ implementations
TclClass	Create and initialize TclObject's
Tcl	C++ methods to access Tcl interpreter
TclCommand	Standalone global commands
EmbeddedTcl	ns script initialization

TclObject

- Basic hierarchy in ns for split objects
- Mirrored in both C++ and OTcl
- Example

```
set tcp [new Agent/TCP]
$tcp set packetSize_ 1024
$tcp advanceby 5000
```

TclObject: Hierarchy and Shadowing

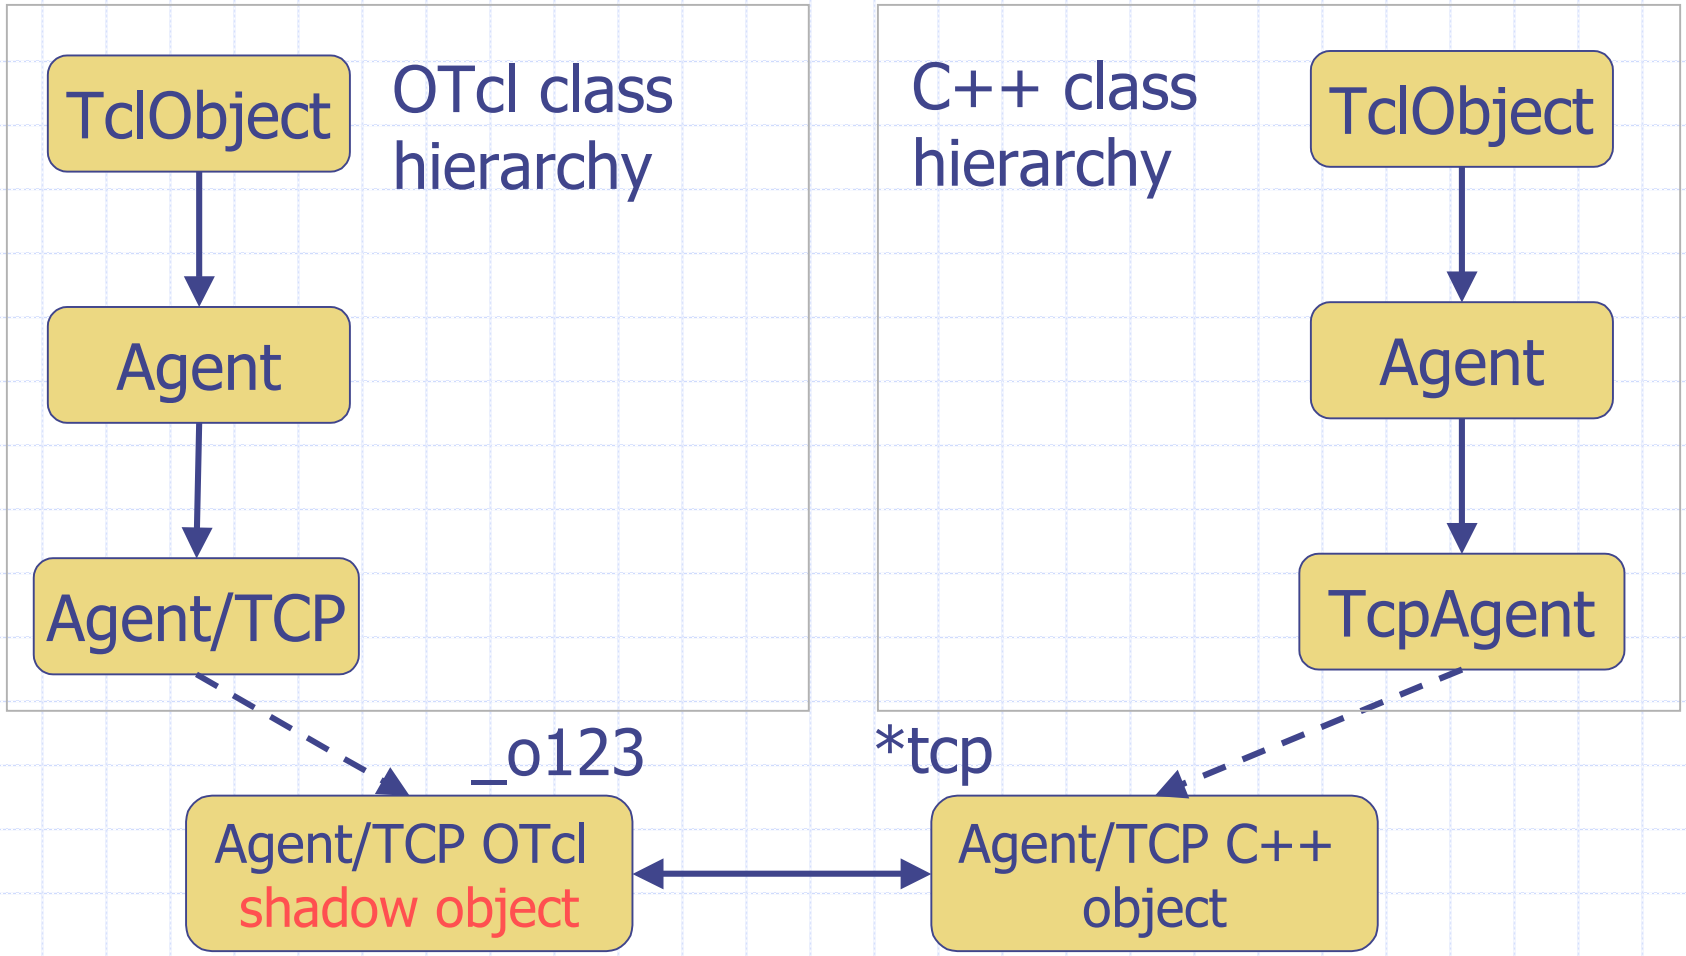

TclObject::bind()

- Link C++ member variables to OTcl object variables
- C++

```
TcpAgent::TcpAgent() {
    bind("window_", &wnd_);
    … …
}
```

  - bind_time(), bind_bool(), bind_bw()
- OTcl

```
set tcp [new Agent/TCP]
$tcp set window_ 200
```

Initialization of Bound Variables

- Initialization through OTcl class variables

```
Agent/TCP set window_ 50
```

- Do all initialization of bound variables in ~ns/lib/ns-default.tcl
  - Otherwise a warning will be issued when the shadow object is created

Implementation of Bound Variables

- Class InstVar
  - One object per bound variable – expensive!
  - InstVarInt, InstVarReal, …
- Created by TclObject::bind()
  - Create instance variable in OTcl stack
  - Enable trap read/write to OTcl variable using `Tcl_TraceVar()`
  - Connect to C++ variable in the trap

TclObject::command()

- Implement OTcl methods in C++
- Trap point: OTcl method cmd{}
- Send all arguments after cmd{} call to TclObject::command()

TclObject::command()

- OTcl

```
set tcp [new Agent/TCP]
$tcp advance 10
```

- C++

```
int TcpAgent::command(int argc,
                      const char*const* argv) {
    if (argc == 3) {
        if (strcmp(argv[1], "advance") == 0) {
            int newseq = atoi(argv[2]);
            ……
            return(TCL_OK);
        }
    }
    return (Agent::command(argc, argv);
}
```

TclObject::command()

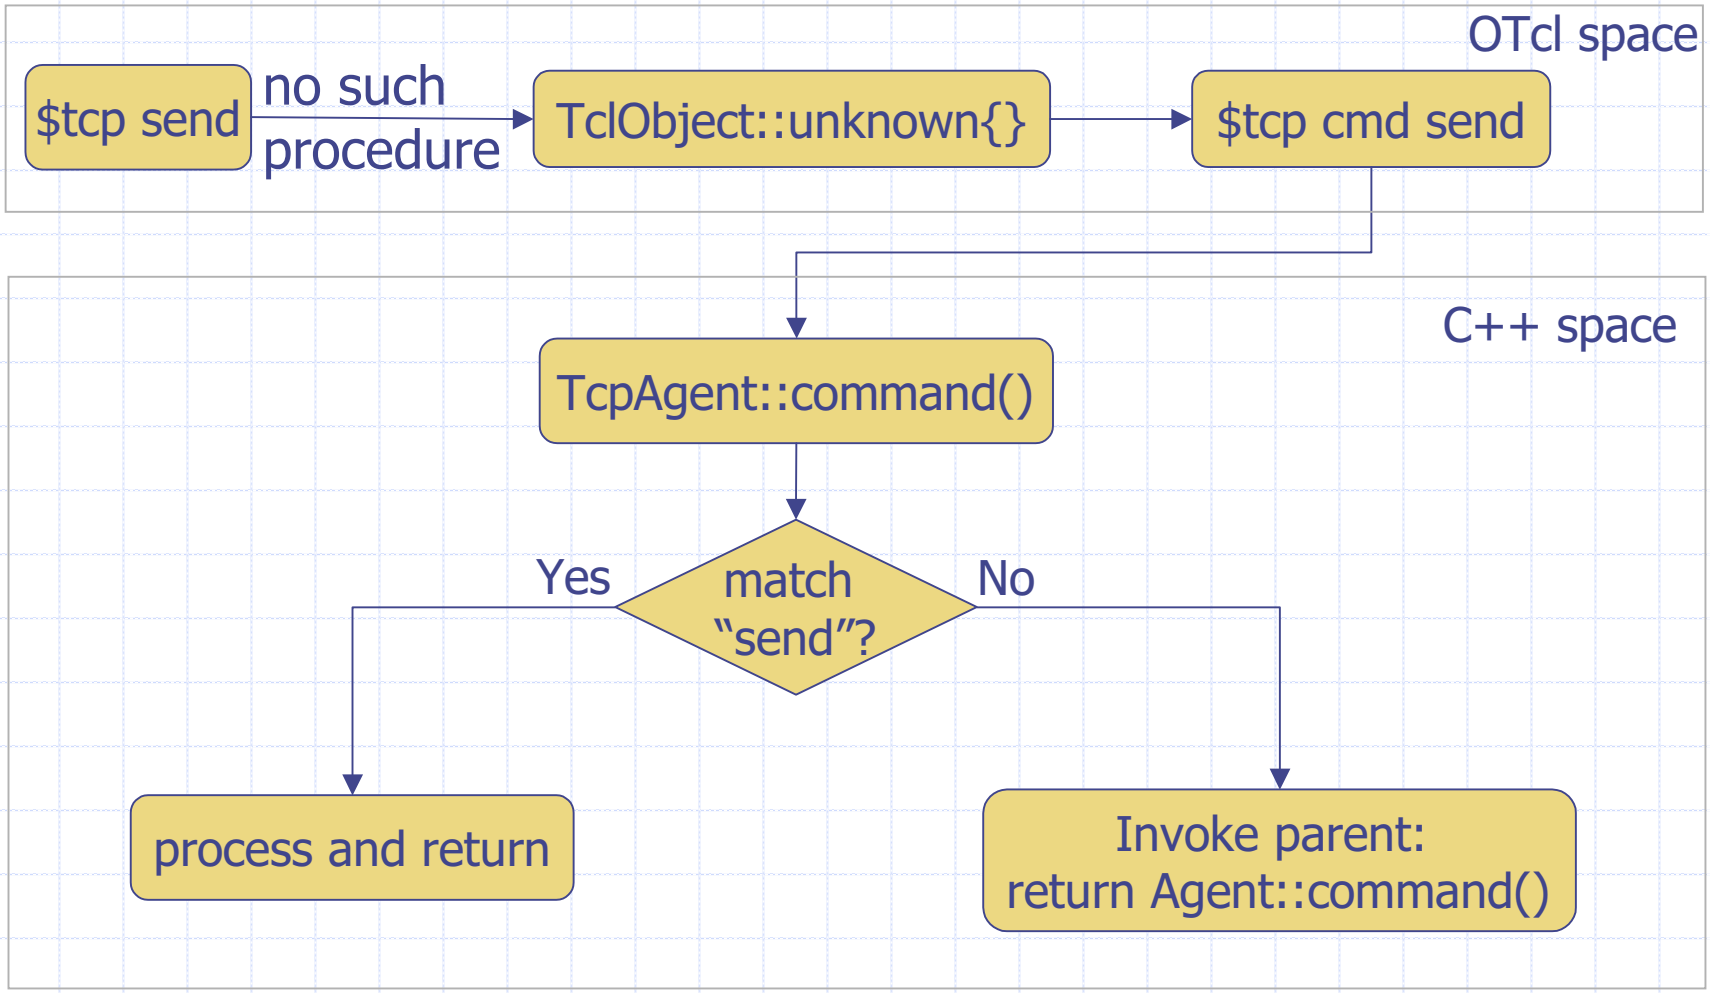

TclObject: Creation and Deletion

- Global procedures: new{}, delete{}
- Example

```
set tcp [new Agent/TCP]
…
delete $tcp
```

TclObject: Creation and Deletion

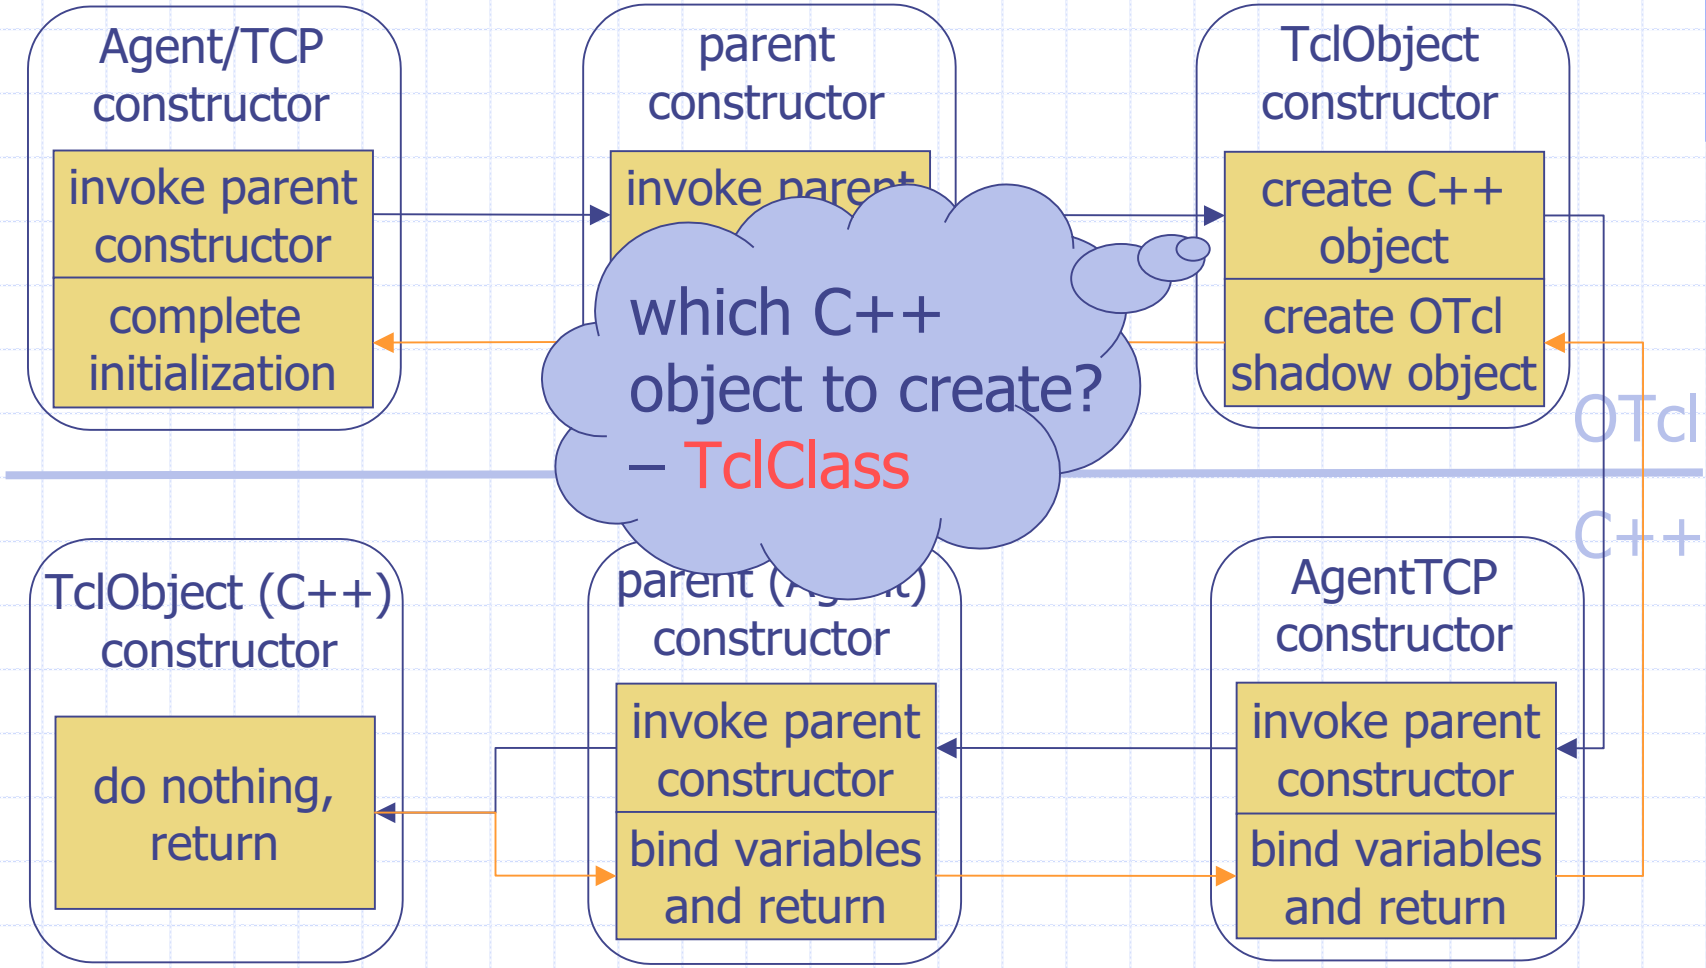

TclClass

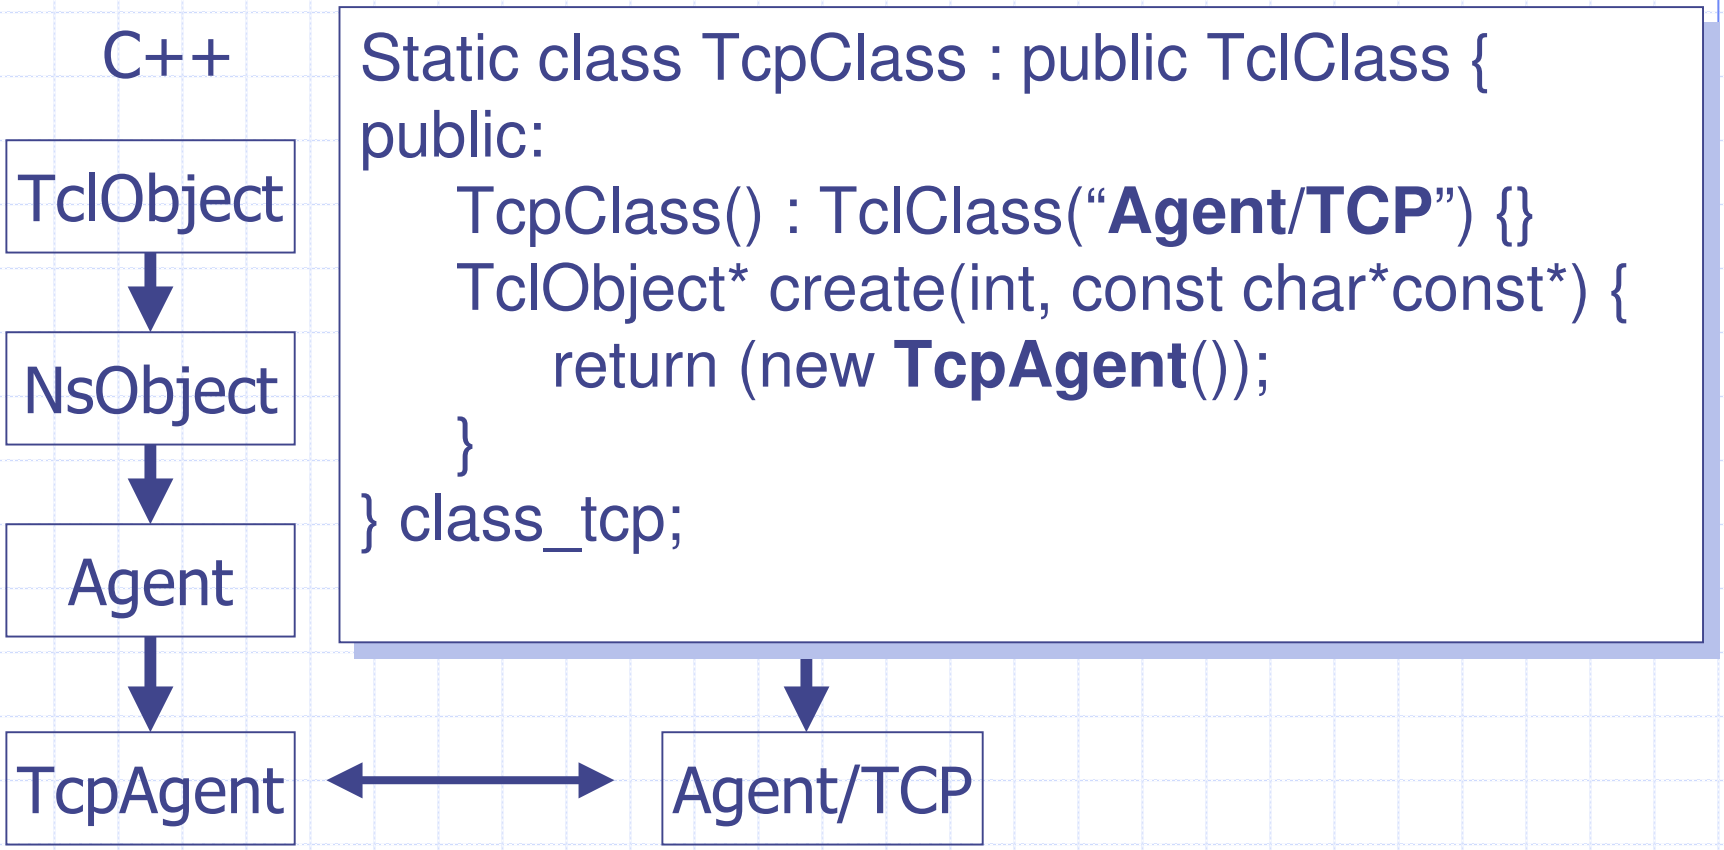
C++
TclObject
NsObject
Agent
TcpAgent
Agent/TCP
Static class TcpClass : public TclClass {
public:
TcpClass() : TclClass("Agent/TCP") {}
TclObject* create(int, const char*const*) {
return (new TcpAgent());
}
} class_tcp;

TclClass: Mechanism

- Initialization at runtime startup

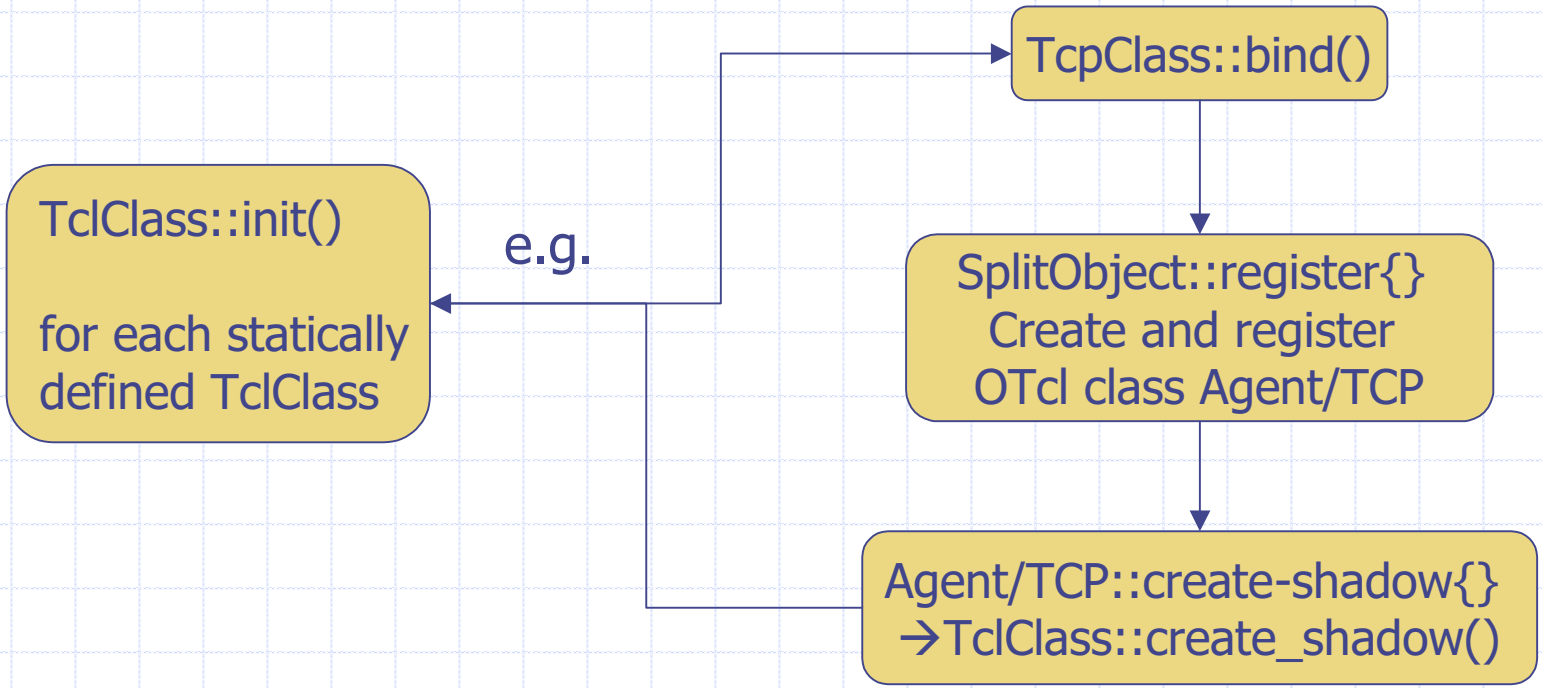

Class Tcl

- Singleton class with a handle to Tcl interpreter
- Usage
  - Invoke OTcl procedure
  - Obtain OTcl evaluation results
  - Pass a result string to OTcl
  - Return success/failure code to OTcl

Class Tcl

```
Tcl& tcl = Tcl::instance();
if (argc == 2) {
    if (strcmp(argv[1], "now") == 0) {
            tcl.resultf("%g", clock());
            return TCL_OK;
    }
    tcl.error("command not found");
    return TCL_ERROR;
 } else if (argc == 3) {
    tcl.eval(argv[2]);
    clock_ = atof(tcl.result());
    return TCL_OK;
}
```

Class TclCommand

- C++ implementation of global OTcl commands

```
class RandomCommand : public TclCommand {
public:
        RandomCommand() : TclCommand("ns-random") {}
        virtual int command(int argc, const char*const* argv);
};

int RandomCommand::command(int argc, const char*const* argv)
{
        Tcl& tcl = Tcl::instance();
        if (argc == 1) {
                sprintf(tcl.buffer(), "%u", Random::random());
                tcl.result(tcl.buffer());
        }
```

EmbeddedTcl

- Pre-load OTcl scripts at ns runtime startup
  - Recursively load `~ns/tcl/lib/ns-lib.tcl`:

```
source ns-autoconf.tcl
source ns-address.tcl
source ns-node.tcl
.......
```

  - Load everything into a single C++ string
  - Execute this string at runtime startup
- Tcl::init(): load `~tclcl/tcl-object.tcl`
- Tcl_AppInit(): load `~ns/tcl/lib/ns-lib.tcl`

EmbeddedTcl

- How it works
  - `tcl2c++`: provided by TclCL, converts tcl scripts into a C++ static character array
  - Makefile.in:

```
tclsh8.0 bin/tcl-expand.tcl tcl/lib/ns-
  lib.tcl | tcl2c++ et_ns_lib >
  gen/ns_tcl.cc
```

Summary

- TclObject
  - Unified interpreted (OTcl) and compiled (C++) class hierarchies
  - Seamless access (procedure call and variable access) between OTcl and C++
- TclClass
  - The mechanism that makes TclObject work
- Tcl: primitives to access Tcl interpreter

Outline

- Fundamental concept
  - Split object
- Plumbing
  - Wired world
  - Wireless world
- Scaling

ns Internals

- Discrete event scheduler
- Network topology
- Routing
- Transport
- Packet flow
- Packet format
- Application

Discrete Event Scheduler

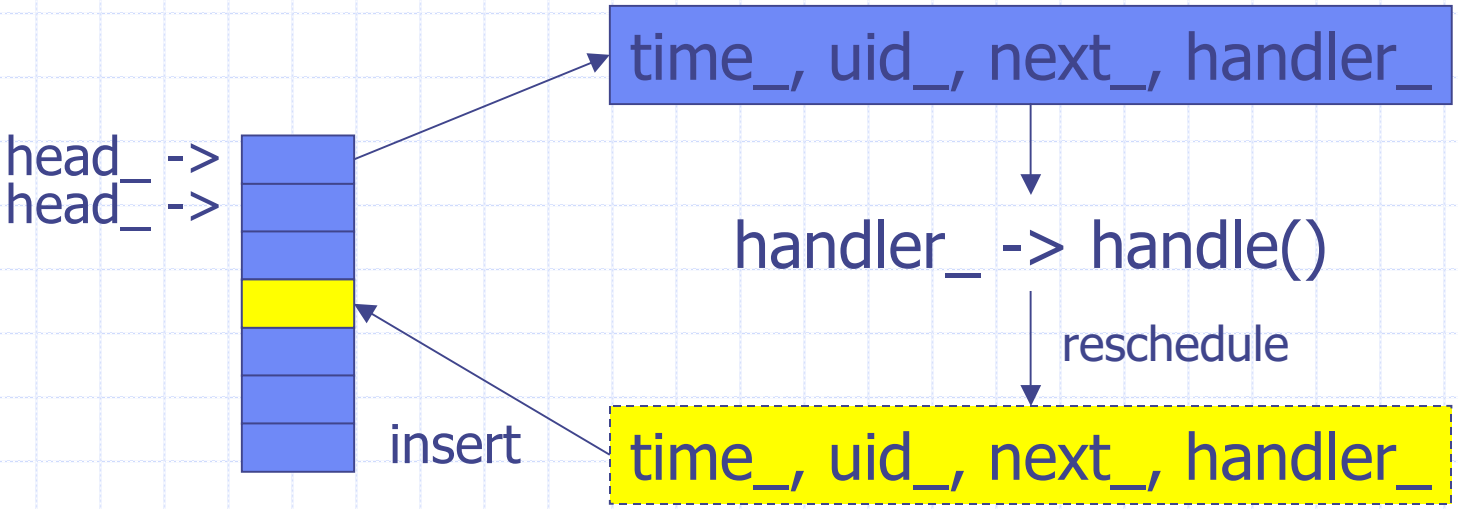

- Three types of schedulers
  - List: simple linked list, order-preserving, O(N)
  - Heap: O(logN)
  - Calendar: hash-based, fastest, O(1)

Network Topology: Node

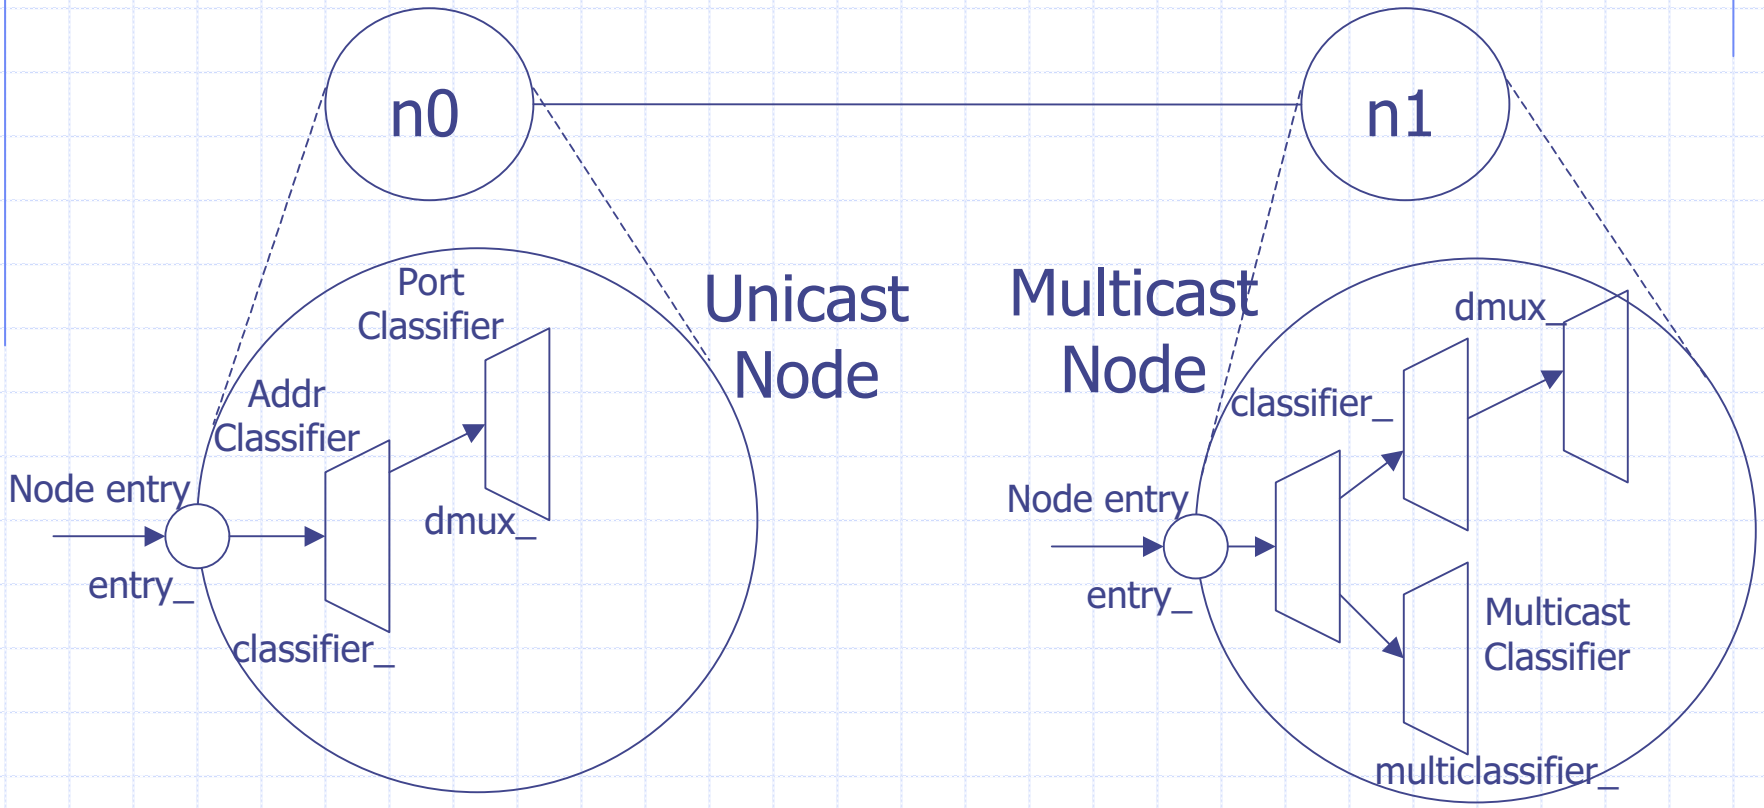

Network Topology: Link

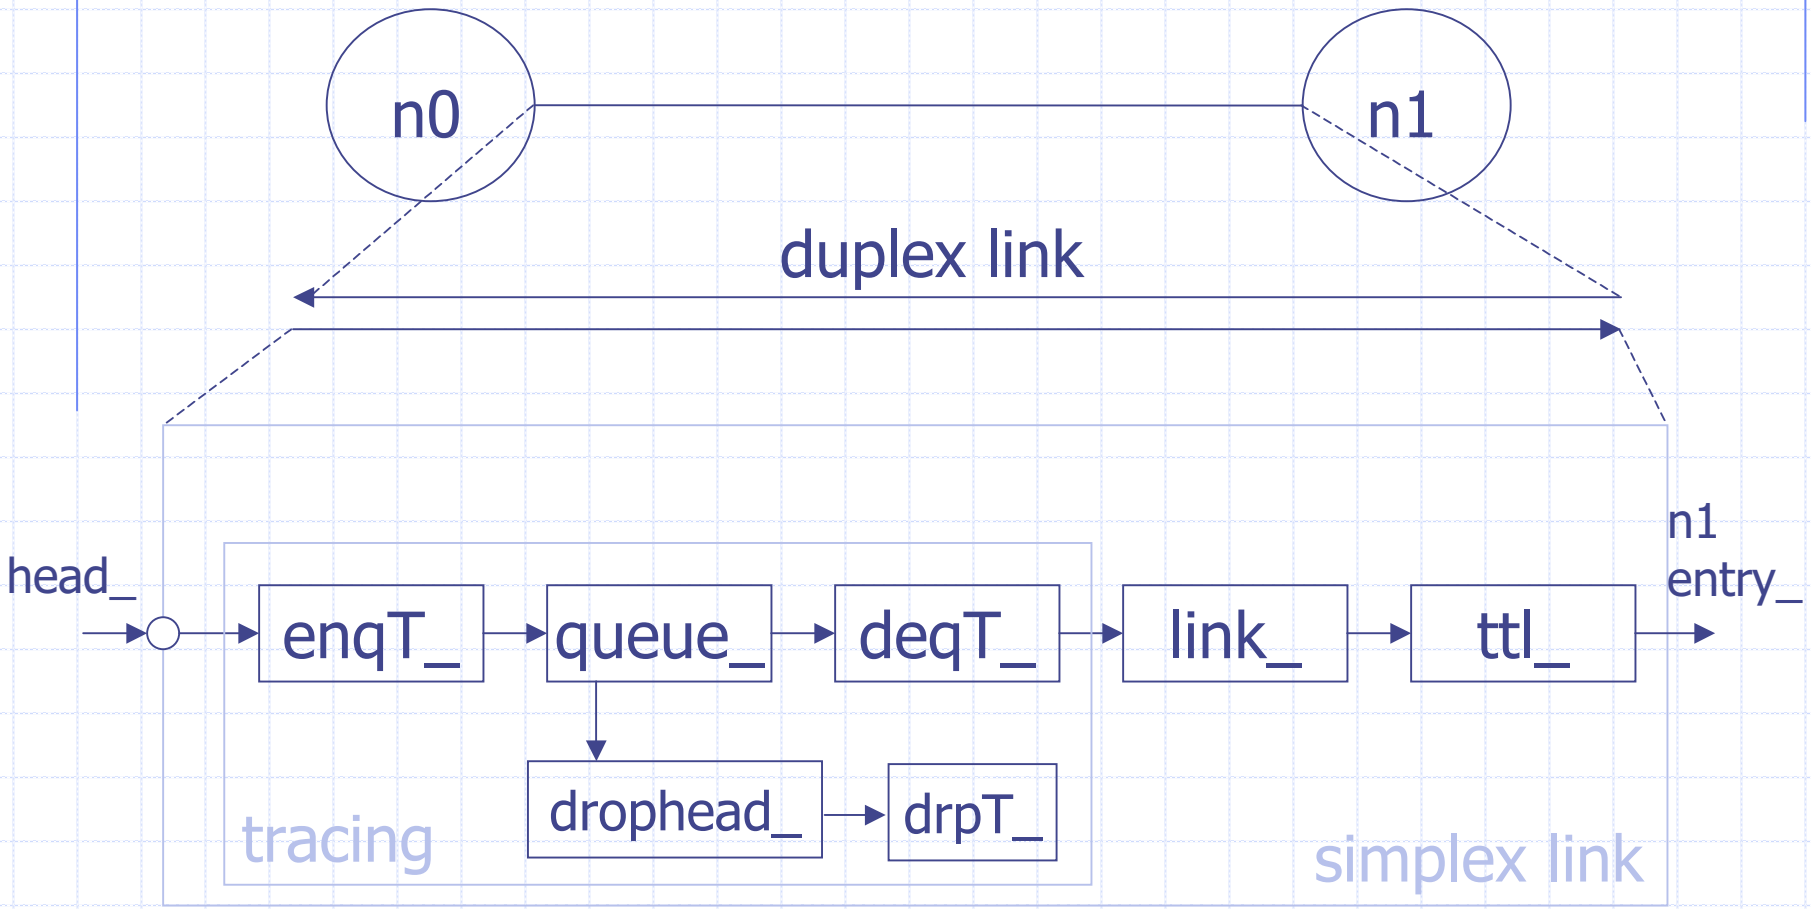

Routing

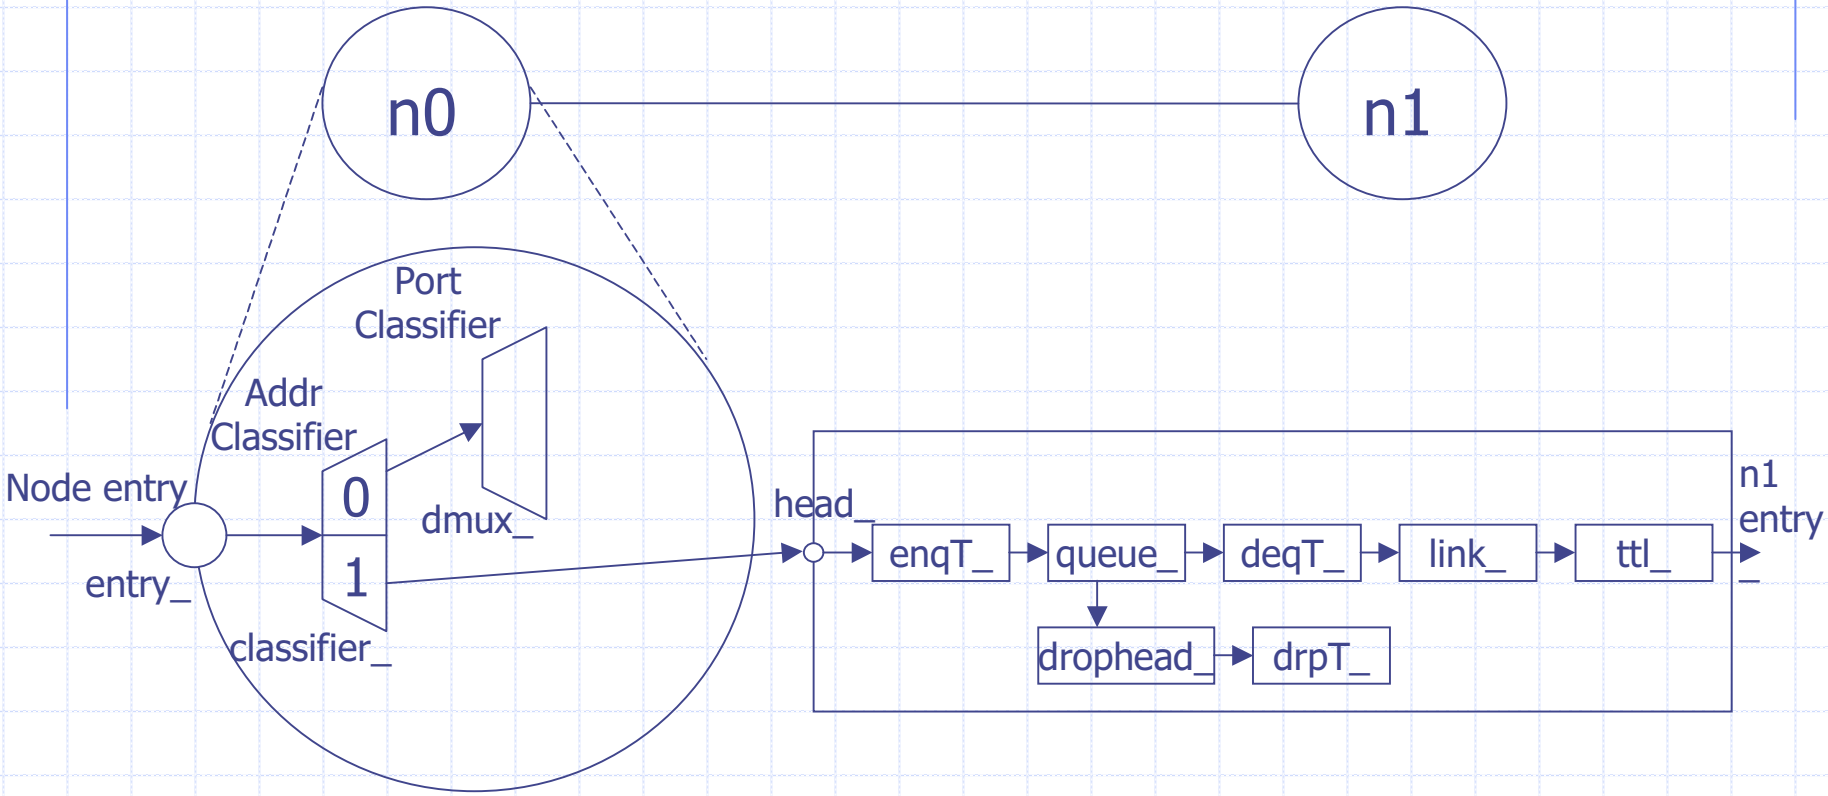
n0
n1
Port
Classifier
Addr
Classifier
Node entry
0
1
dmux_
entry_
classifier_
head_
enqT_
queue_
deqT_
link_
ttl_
n1
entry
_
drophead_
drpT_

Routing (con't)

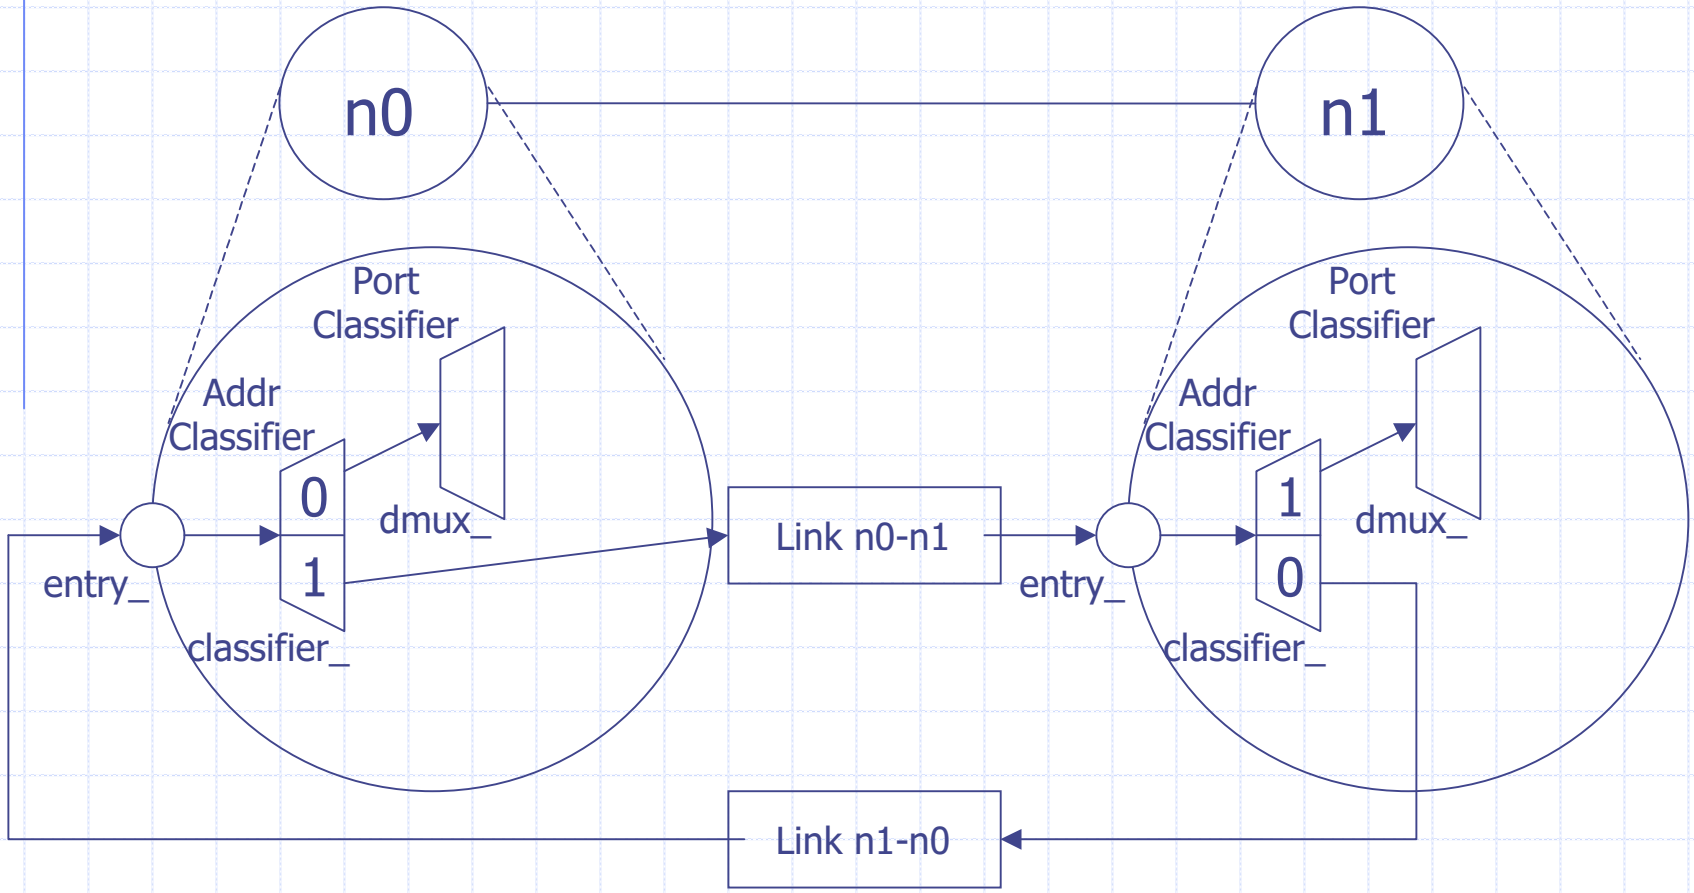

Transport

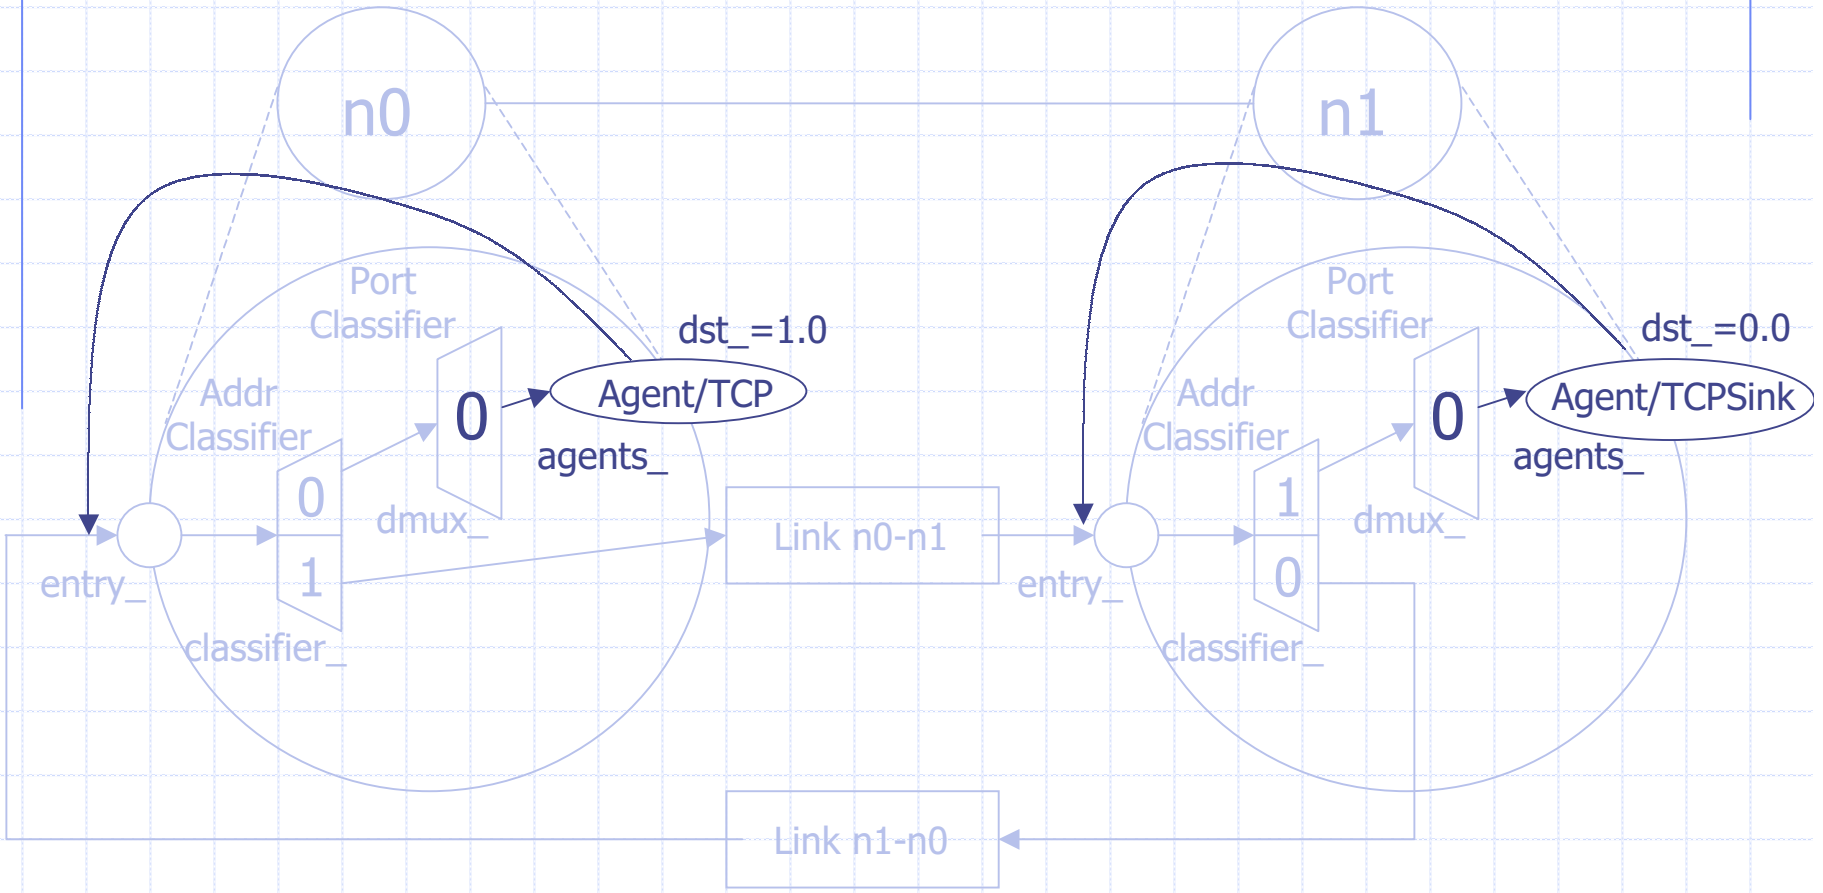
n0
n1
Port
Classifier
Addr
Classifier
0
1
dmux_
dst_=1.0
Agent/TCP
agents_
entry_
classifier_
Link n0-n1
Link n1-n0
dst_=0.0
Agent/TCPSink

Application: Traffic Generator

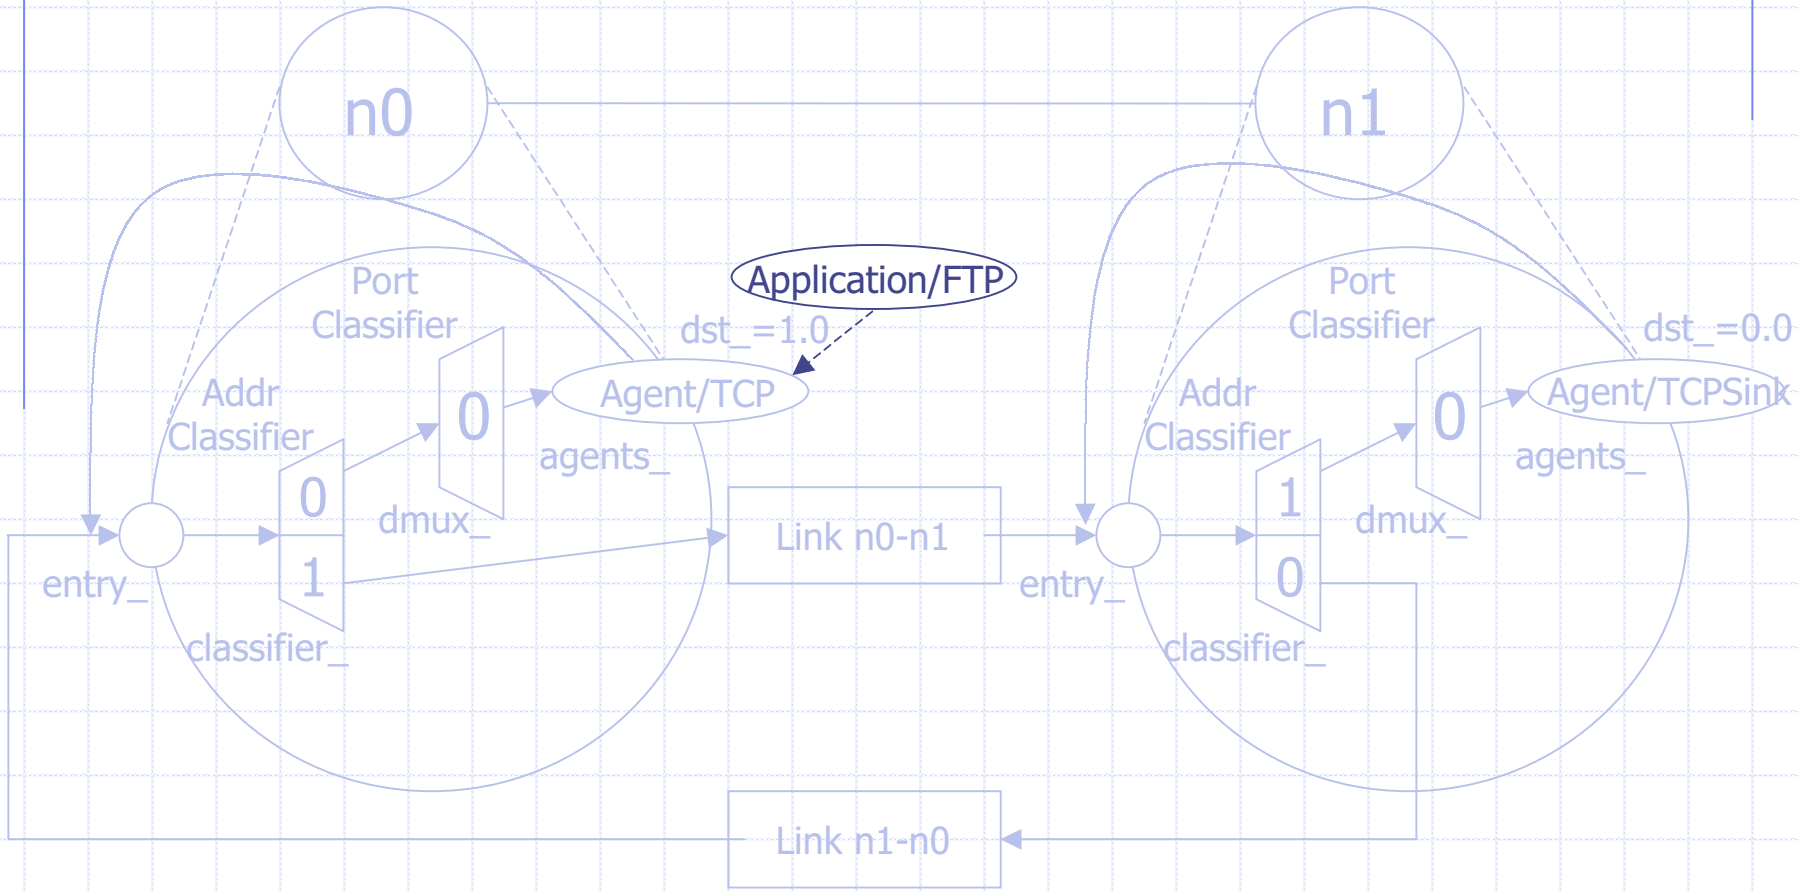

Plumbing: Packet Flow

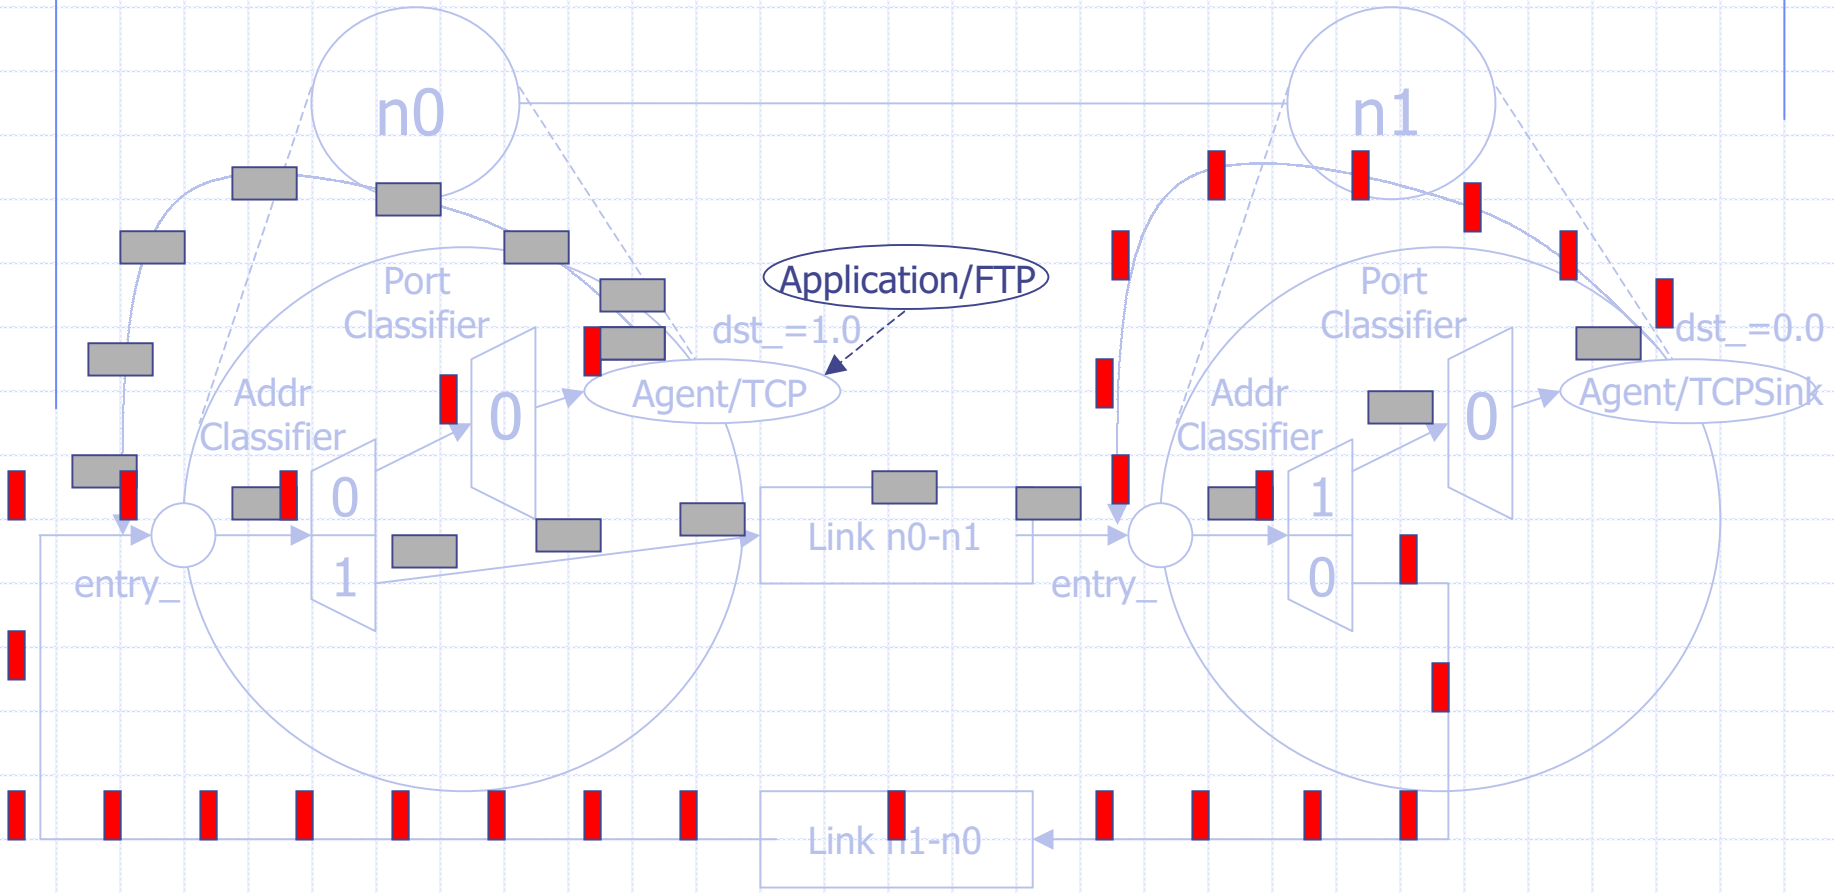

Packet Format

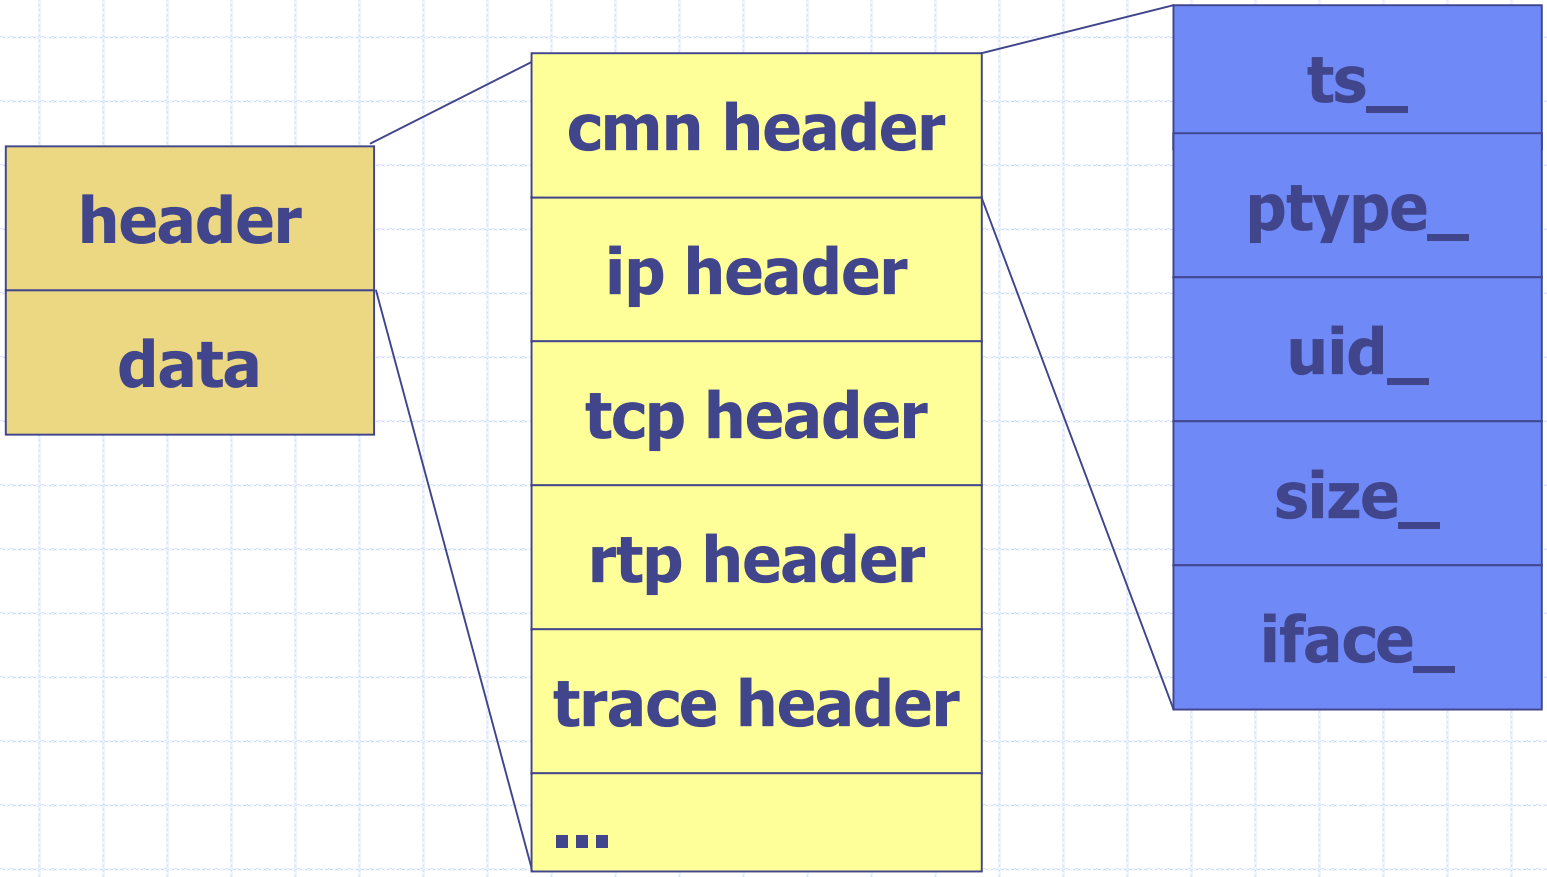

Outline

- Fundamental concept
  - Split object
- Plumbing
  - Wired world
  - Wireless world
- ns scaling

Abstract the Real World

- Packet headers
- Mobile node
- Wireless channel
- Forwarding and routing
- Visualization

Wireless Packet Format

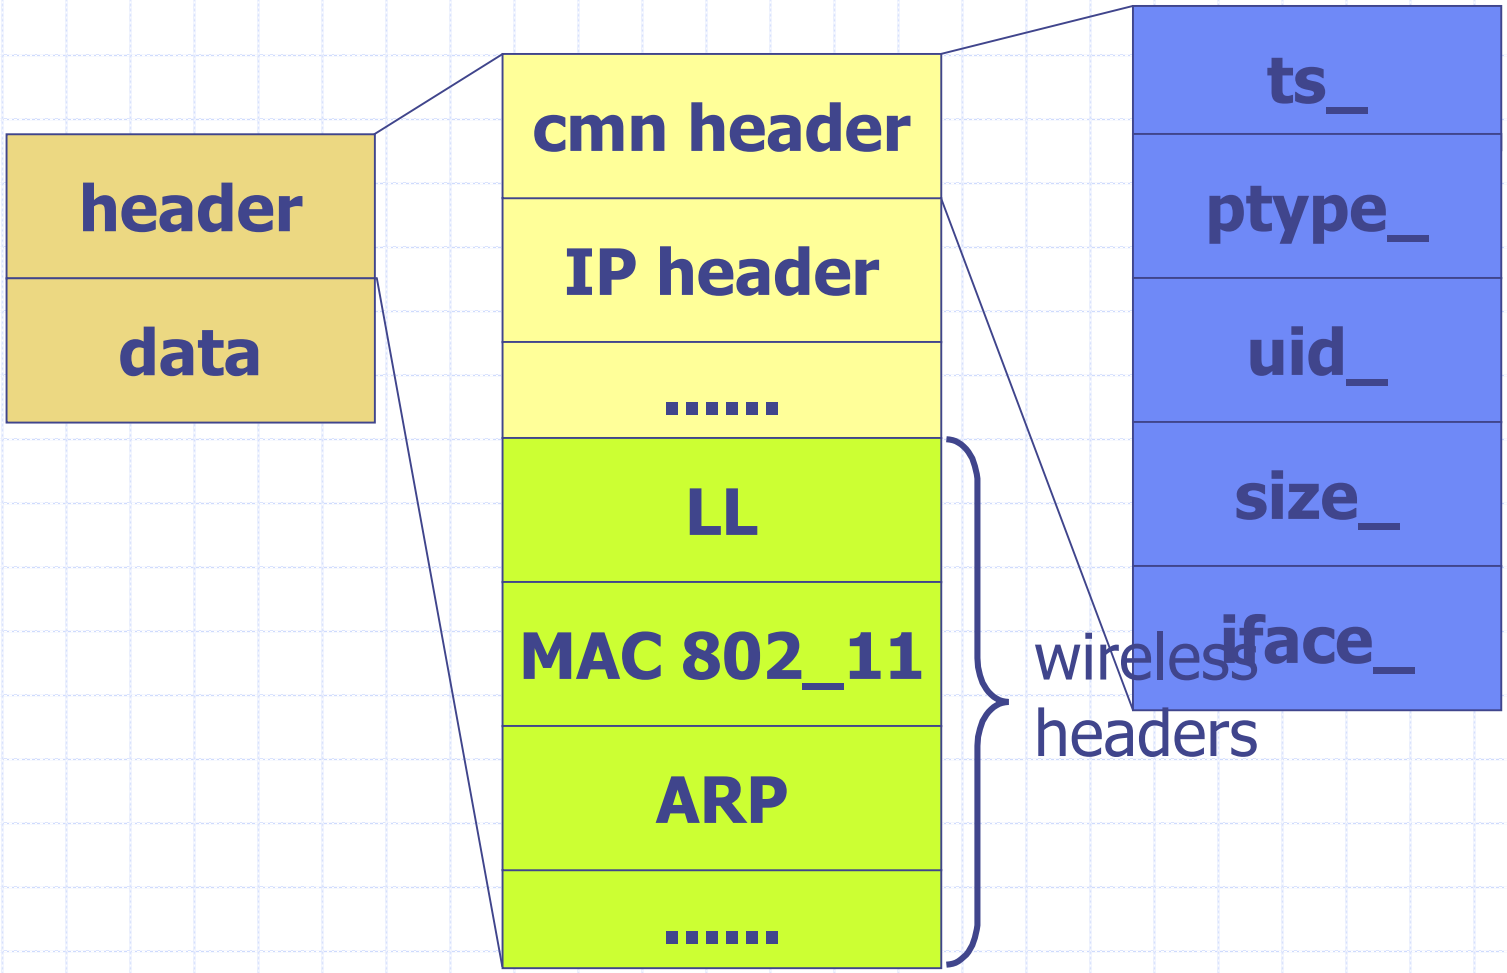

Mobile Node Abstraction

- Location
  - Coordinates (x,y,z)
- Movement
  - Speed, direction, starting/ending location, time ...

Portrait of A Mobile Node

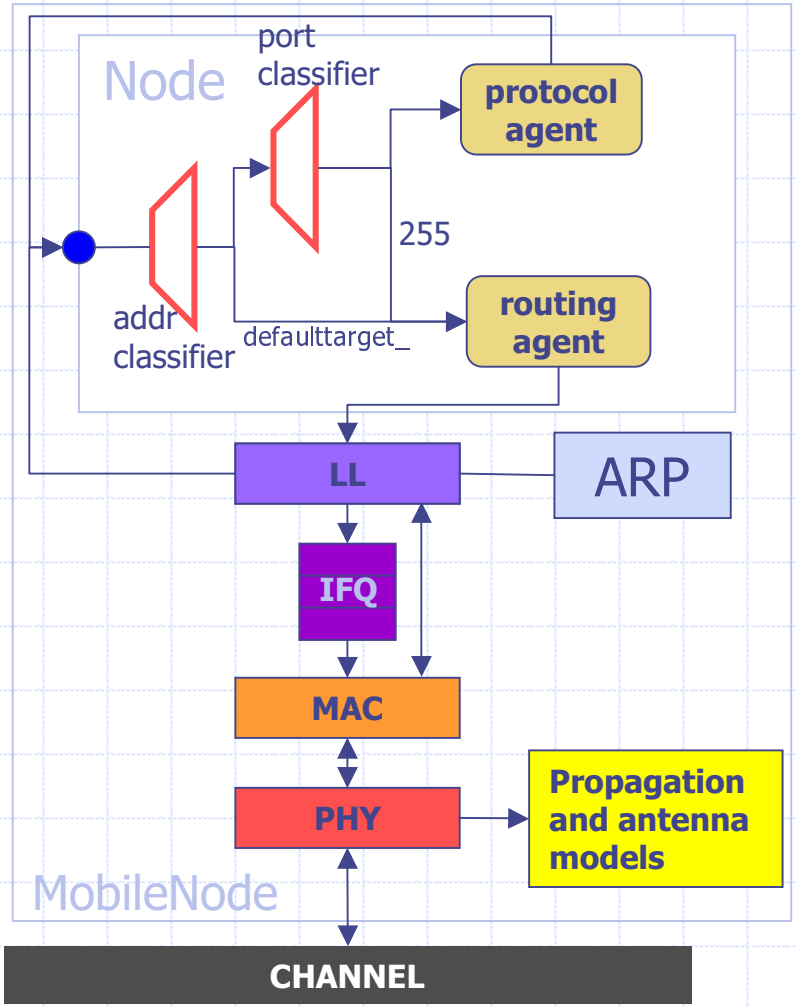



Classifier: Forwarding

Agent: Protocol Entity

Node Entry

LL: Link layer object

IFQ: Interface queue

MAC: Mac object

PHY: Net interface

Mobile Node: Components

- Link Layer
  - Same as LAN, but with a separate ARP module
- Interface queue
  - Give priority to routing protocol packets
- Mac Layer
  - IEEE 802.11
  - RTS/CTS/DATA/ACK for all unicast packets
  - DATA for all broadcast packets

Mobile Node: Components

- Network interface (PHY)
  - Parameters based on Direct Sequence Spread Spectrum (WaveLan)
  - Interface with: antenna and propagation models
  - Update energy: transmission and reception
- Radio Propagation Model
  - Friss-space attenuation($1/r^2$) at near distance
  - Two-ray Ground ($1/r^4$) at far distance
- Antenna
  - Omni-directional, unity-gain

Wireless Channel

- Duplicate packets to all mobile nodes attached to the channel except the sender
- It is the receiver's responsibility to decide if it will accept the packet
  - Collision is handled at individual receiver
  - $O(N^2)$ messages → grid keeper

Grid-keeper: An Optimization

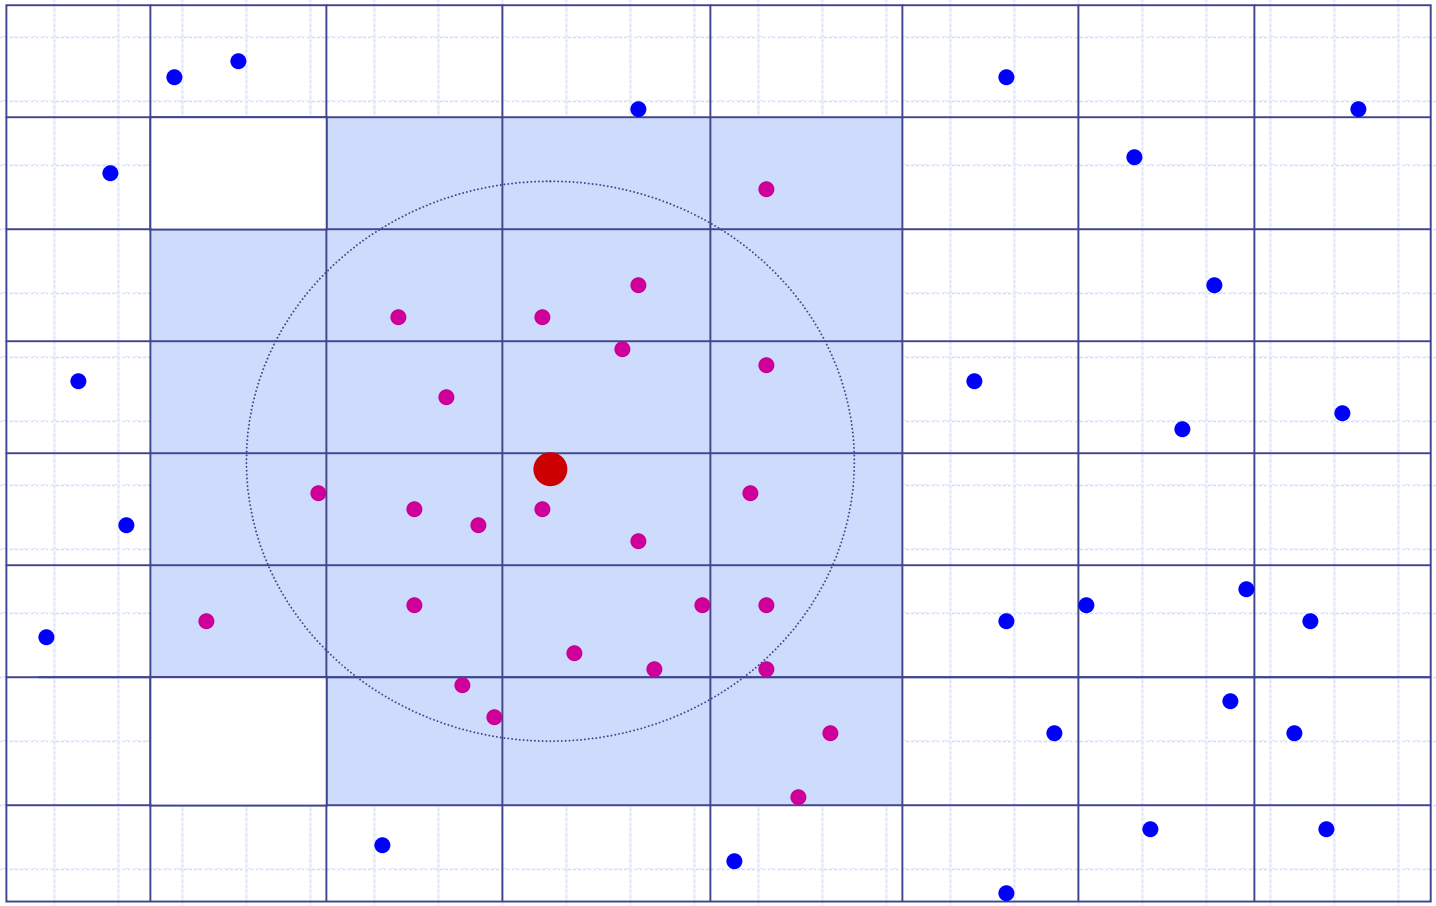

Outline

- Fundamental concept
  - Split object
- Plumbing
  - Wired world
  - Wireless world
- ns scaling

ns Scaling

- Limitations to simulation size
  - Memory
  - Run time
- Solutions
  - Abstraction
  - Fine-tuning (next session)

Memory Footprint of ns

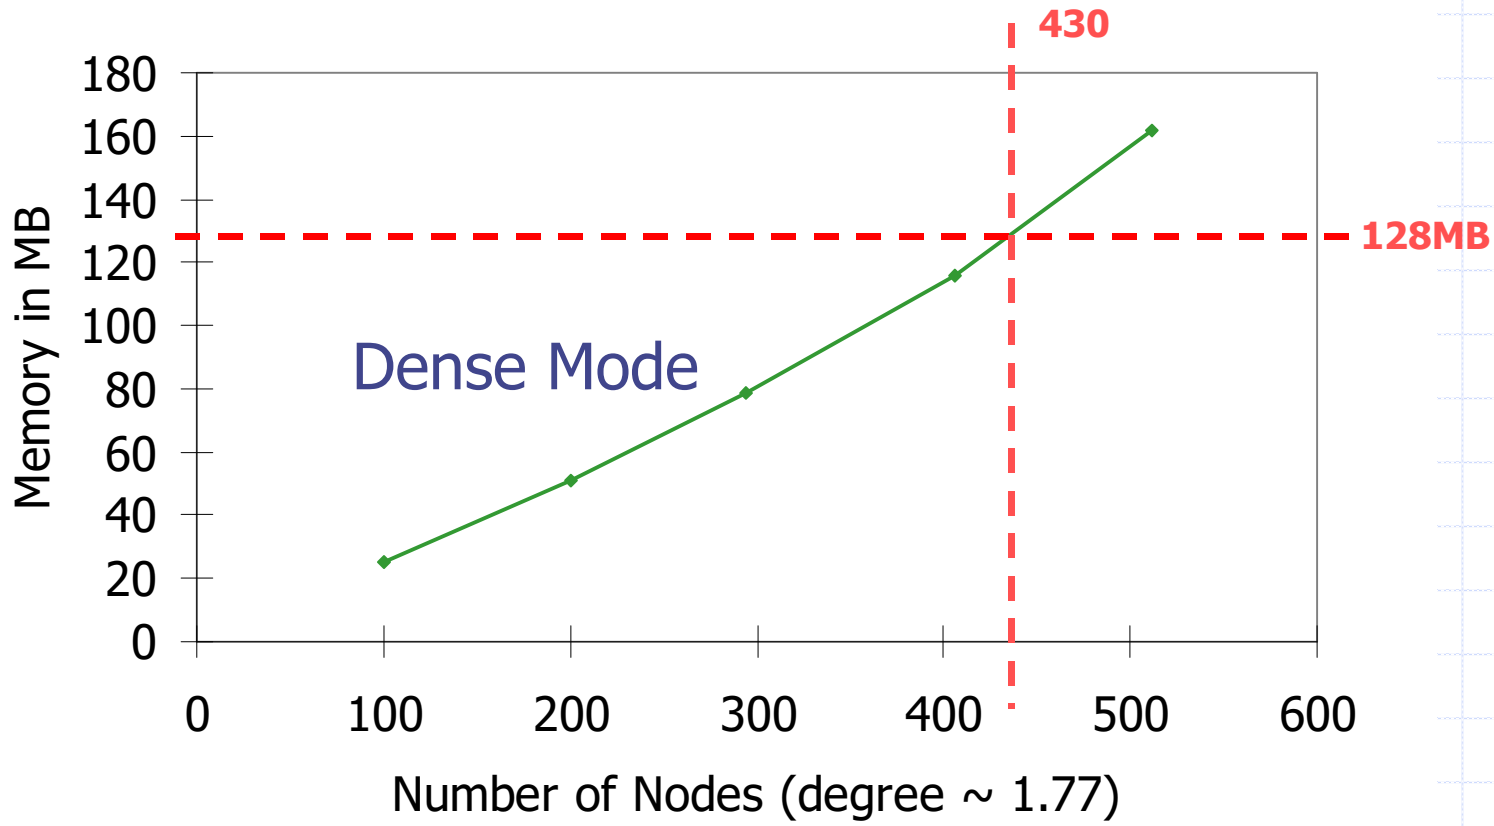

Run Time of ns

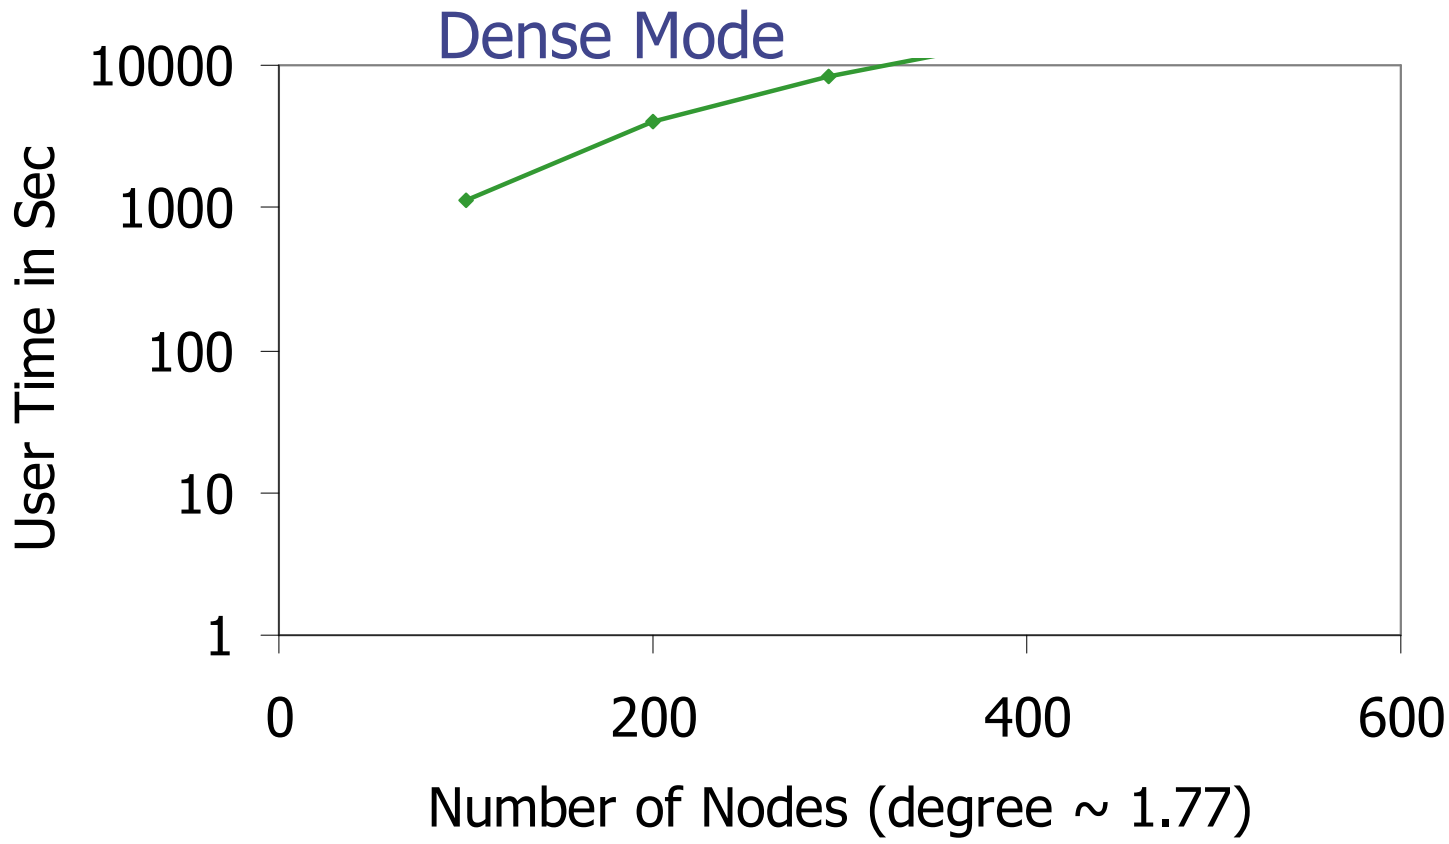

Culprit: Details, Details

- Dense mode tries to capture packet-level behavior
  - Prunes, Joins, …
- Let's abstract it out
  - Centralized multicast
  - SessionSim

Centralized Multicast

Dense Mode Multicast

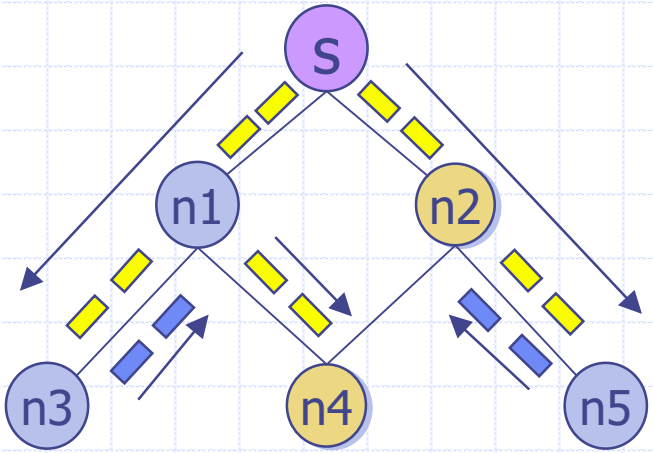

source
receiver
data
prune

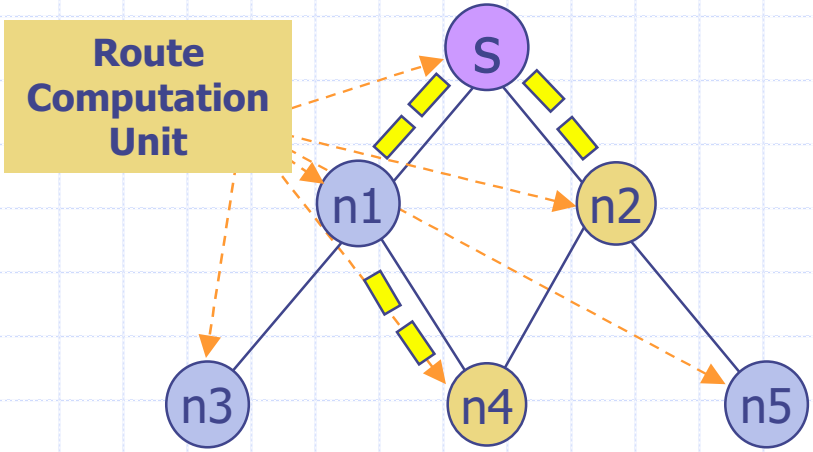

Centralized Multicast

Centralized Multicast

- Usage

```
$ns mrtproto CtrMcast
```

- Limitation
  - No exact dynamic behavior, e.g., routing convergence time
  - Does not mean to replace DM

Further Abstraction

ns Object Sizes	
Multicast Node	6KB
Duplex link	14KB

- Remove all intermediate nodes and links
- Do not model:
  - Detailed queueing
  - Detailed packet delivery

SessionSim

Detailed Packet Distribution

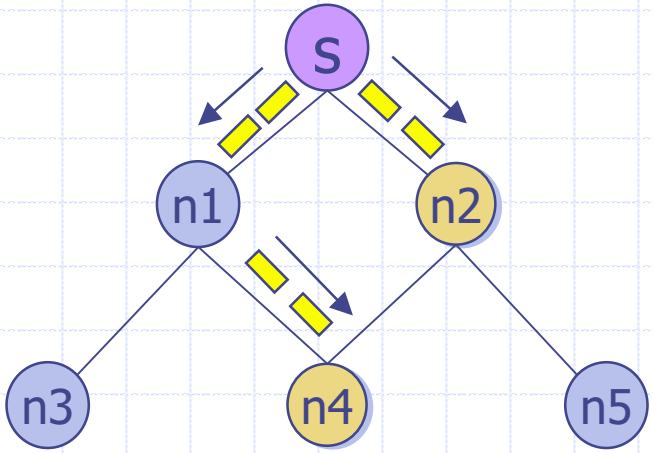



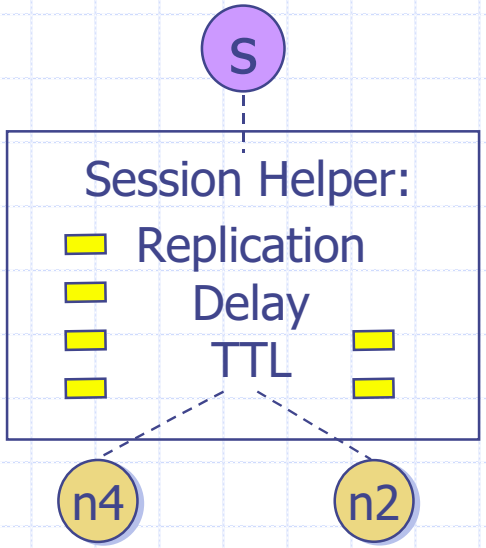

Session Multicast

SessionSim

- Usage

  ```
  set ns [new SessionSim]
  ```

  instead of

  ```
  set ns [new Simulator]
  ```

- Limitation
  - Distorted end-to-end delay
  - Packet loss due to congestion

Memory Footprint of ns

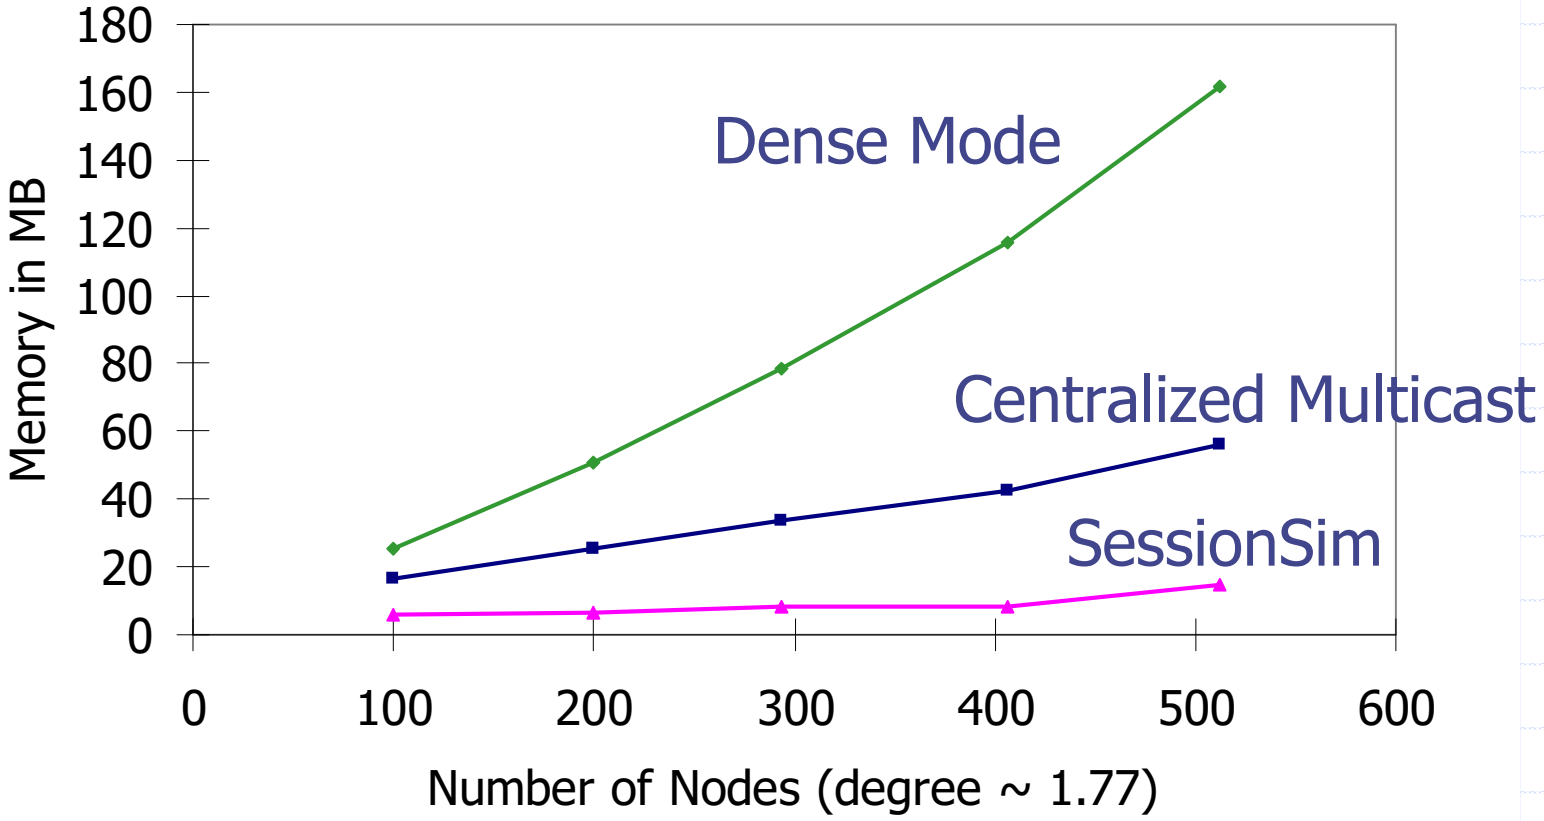

Run Time of ns

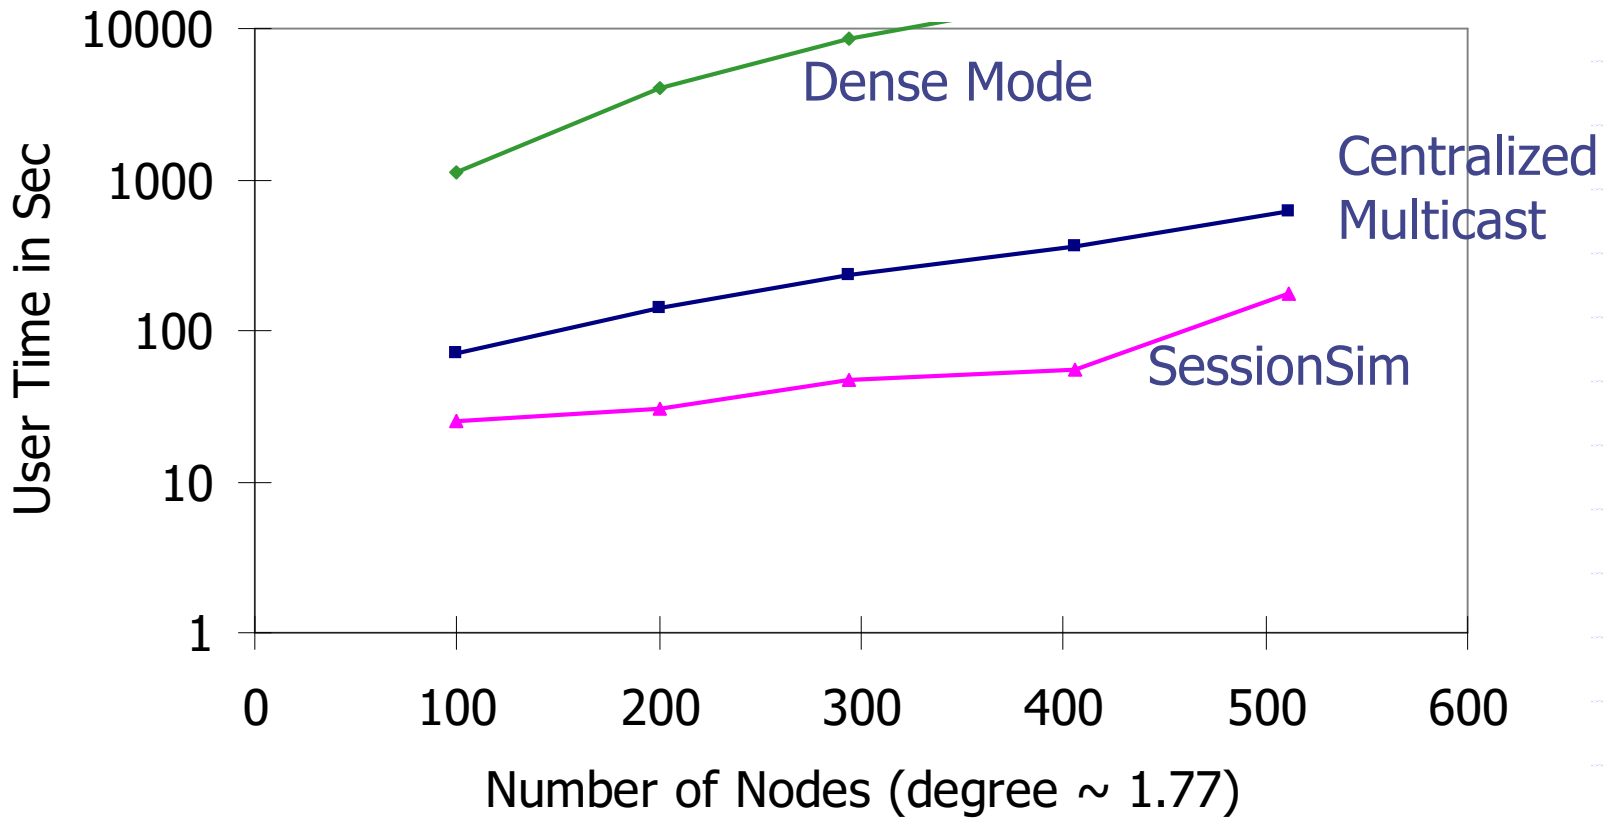

Distortion of Centralized Multicast

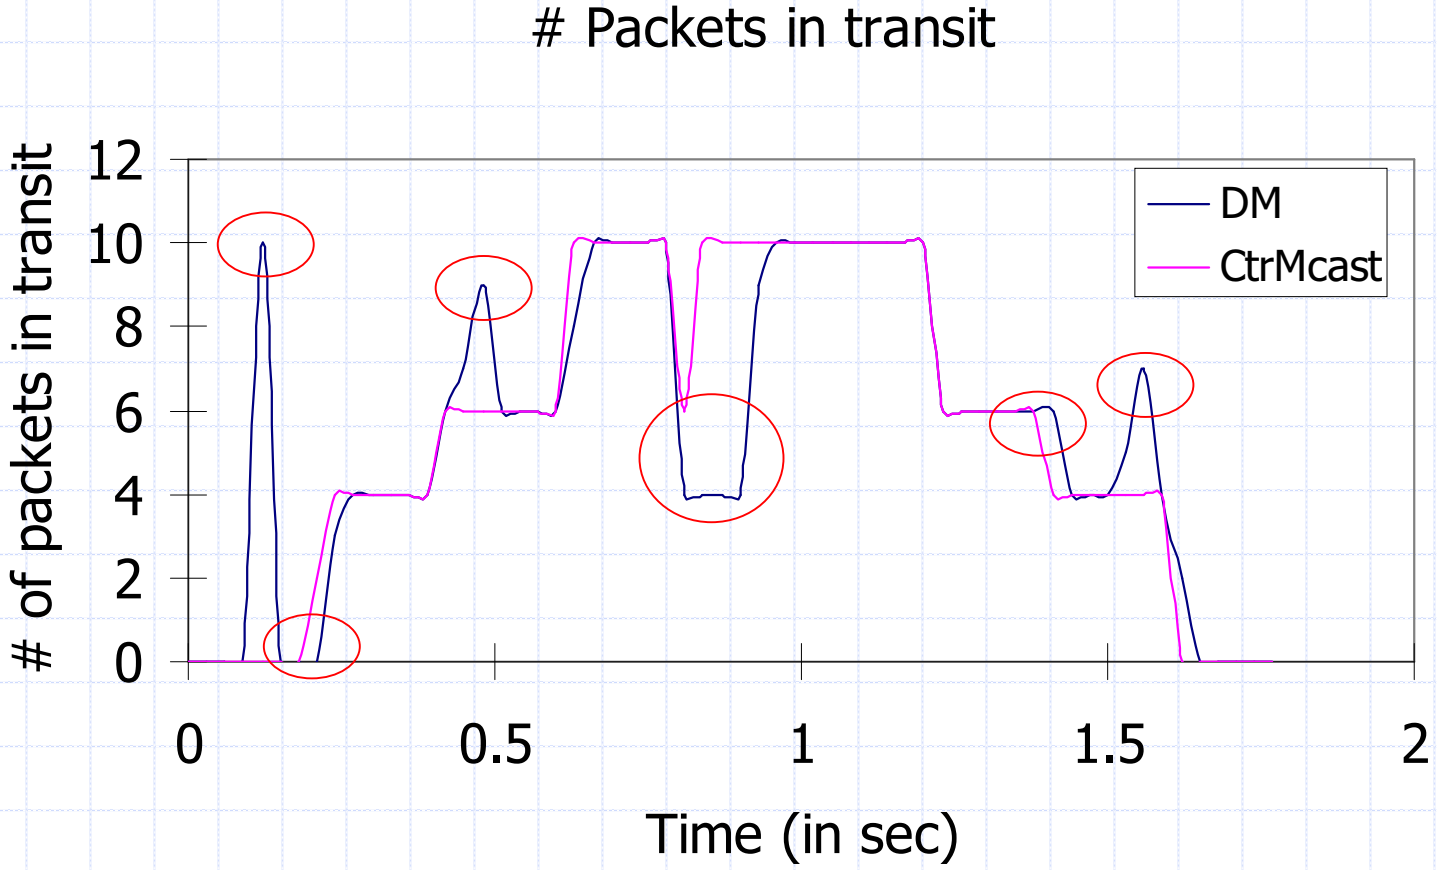

Distortion of SessionSim

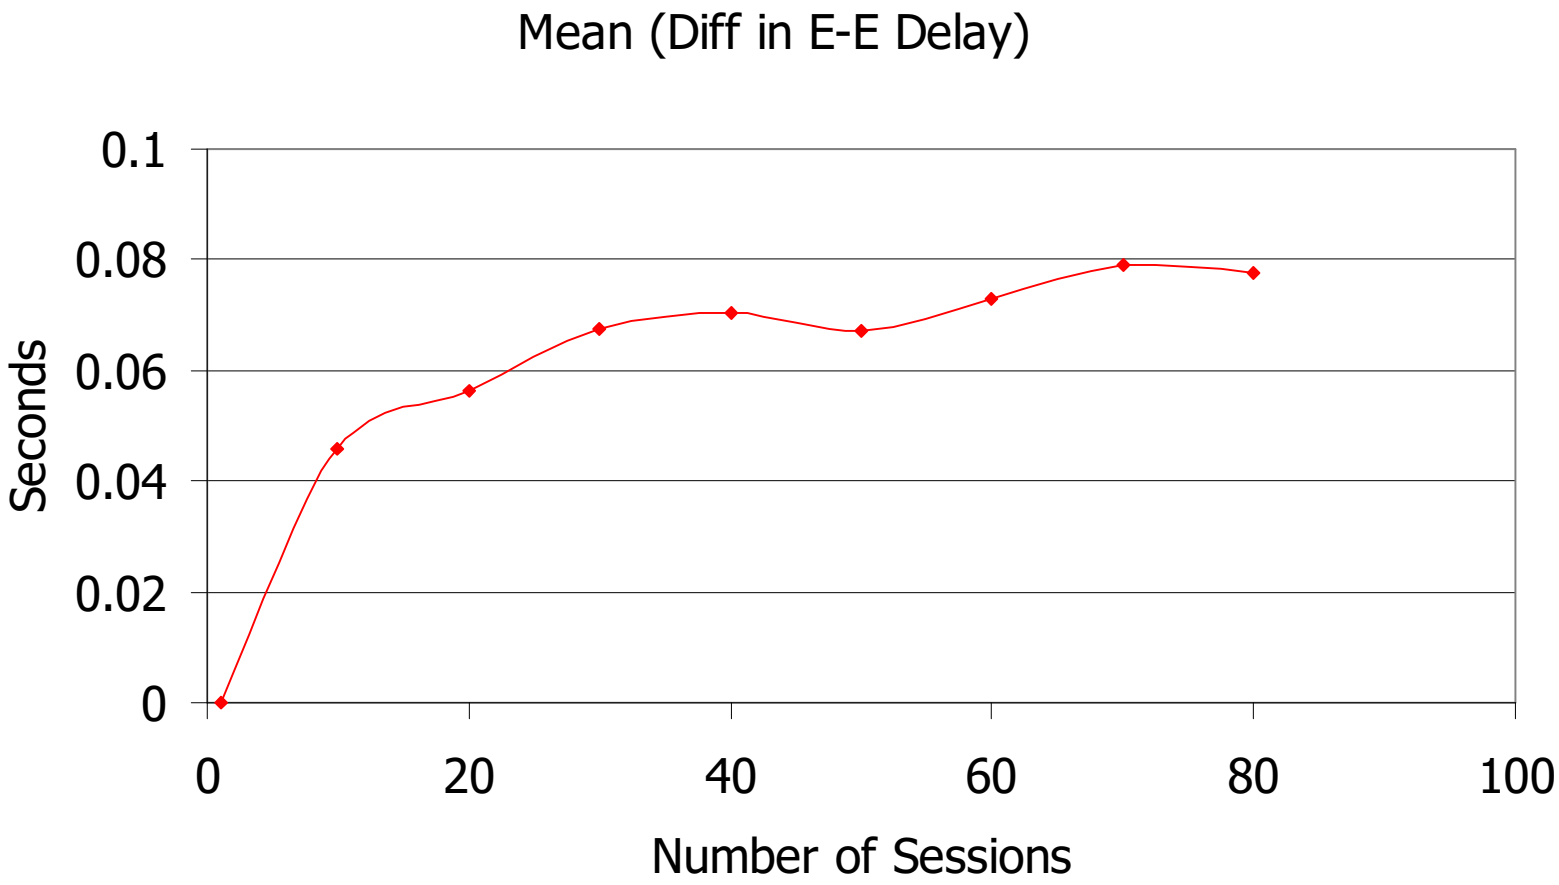

Footnotes

- My sim still uses too much memory?

  Or

- I want large detailed simulation, e.g., Web traffic pattern?

- Fine-tune your simulator
  - We'll cover it this afternoon